

# LED Flush Mount

## LD4-FM08W20

### INSTALLATION SHEET

#### START FROM HERE

- Make sure **POWER** is **COMPLETELY OFF** at the fuse box
- Have your fixture installed by a qualified licensed electrician
- Prepare everything in a clear area
- Wear gloves at all time during this installation
- Read instructions carefully before you start assembly
- Keep this installation sheet for future reference


Technical Support: 1-855-855-8926

#### Please Note:

- This Kuzco LED fixture comes with pre-wired LED module(s).
- Unless instructed to do so, please do not touch any part of the LED module(s) as any unnecessary contact with the module could cause permanent damage.
- For dimming, an ELV (Electronic Low Voltage), TRIAC or 0-10V type of dimmer is required.
- 120-277V input

#### Octagon Junction Box Installation


1. Remove fixture from its original package
2. Use hand tool (5a) to remove mounting plate (1c) from fixture (3a) (See Illustration 1)
3. Attach mounting plate (1c) to electrical junction box (1a) using junction box screws provided (1e) in hardware package
4. Make proper electrical connections (**black** to **hot “L”**, **white** to **neutral “N”**, **ground** to **“GND”**) with wire nuts (1b) provided in hardware package. Connect 0-10V dimming wire, DIM+ to purple, DIM- to gray, with wire nuts provided
5. Twist fixture (3a) onto mounting plate (1c) and secure with fixture screw (3b)

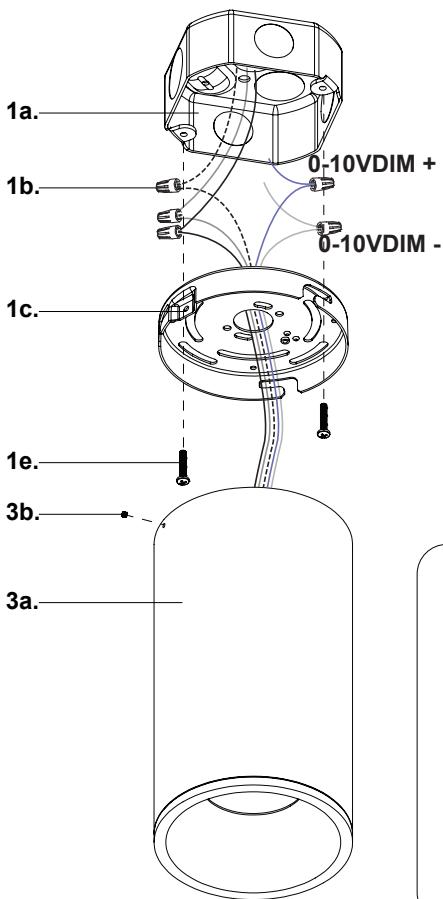

#### Conduit Installation

Note: Conduit and conduit fitting not included

1. Remove fixture from its original package
2. Use hand tool (5a) to remove mounting plate (1c) from fixture (3a) (See Illustration 1)
3. Drill holes for conduit (**not included**) and mounting screws (1e) using template guide on page 2
4. Make proper electrical connections (**black** to **hot “L”**, **white** to **neutral “N”**, **ground** to **“GND”**) with wire nuts (1b) provided in hardware package. Connect 0-10V dimming wire, DIM+ to purple, DIM- to gray, with wire nuts provided
5. Attach mounting plate (1c) to conduit fitting (**not included**), then secure mounting plate (1c) to mounting surface with screws (1e) and anchors (1d)
6. Twist fixture (3a) onto mounting plate (1c) and secure with fixture screw (3b)

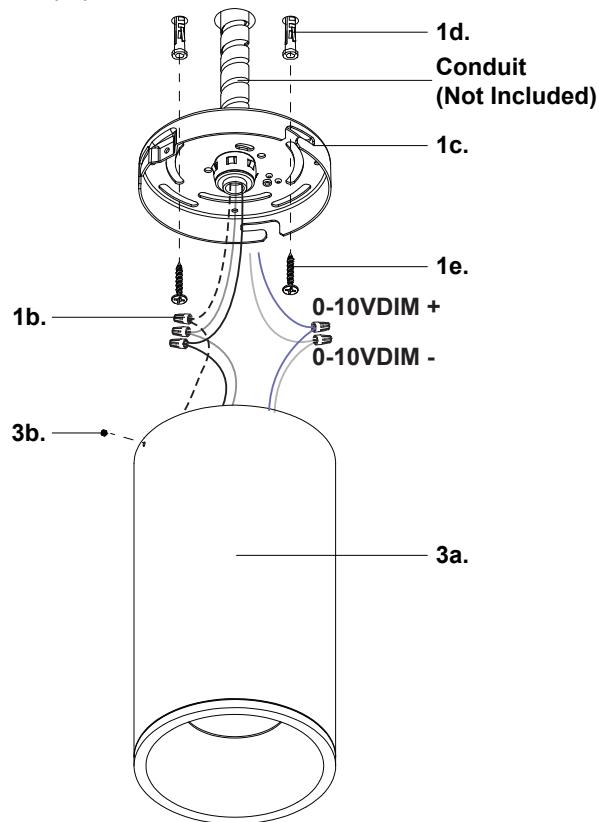

**K U Z C O**

19054 28th Avenue Surrey, BC Canada V3Z 6M3  
T: 604 538 7162 TF: 1-855 85 KUZCO F: 604 538 7196  
W: kuzcolighting.com  
20241010

### START FROM HERE


- Make sure **POWER** is **COMPLETELY OFF** at the fuse box
- Have your fixture installed by a qualified licensed electrician
- Prepare everything in a clear area
- Wear gloves at all time during this installation
- Read instructions carefully before you start assembly
- Keep this installation sheet for future reference

Technical Support: 1-855-855-8926

### Please Note:

- This Kuzco LED fixture comes with pre-wired LED module(s).
- Unless instructed to do so, please do not touch any part of the LED module(s) as any unnecessary contact with the module could cause permanent damage.
- For dimming, an ELV (Electronic Low Voltage), TRIAC or 0-10V type of dimmer is required.
- 120-277V input

## Mounting Holes Template Guide

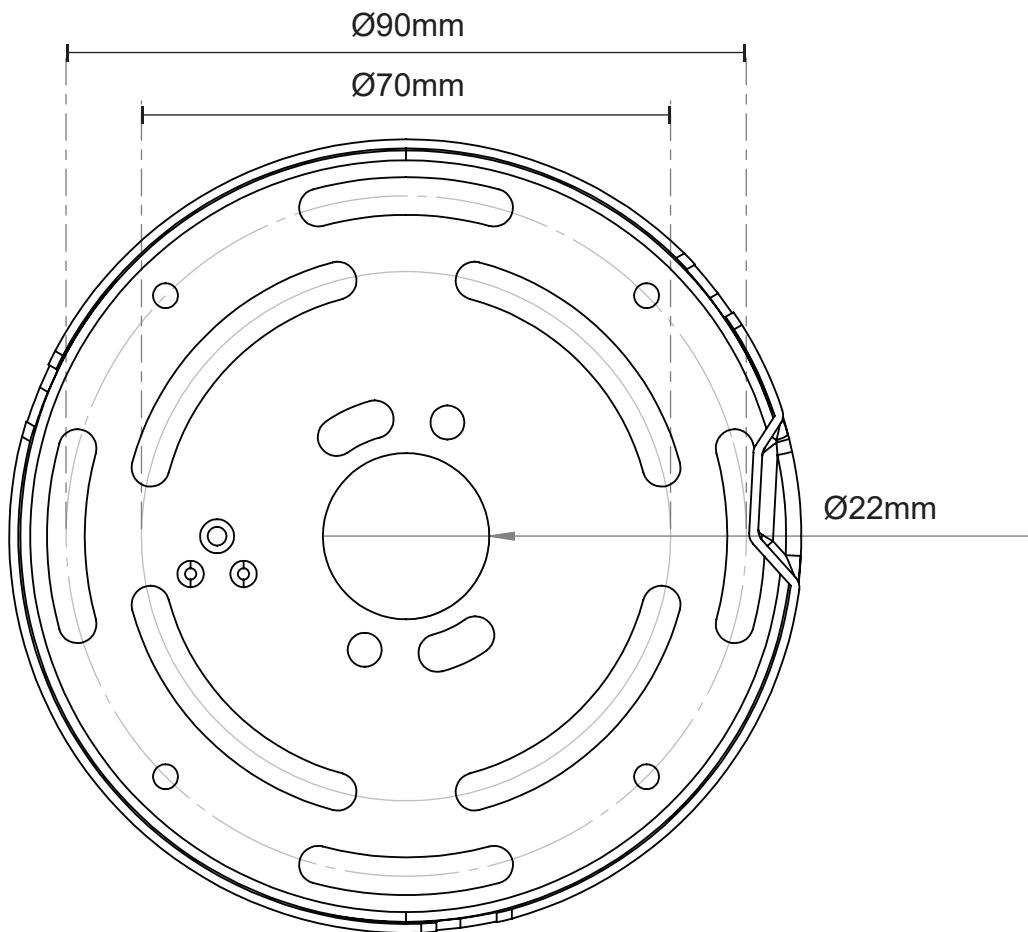

K U Z C O .

19054 28th Avenue Surrey, BC Canada V3Z 6M3  
T: 604 538 7162 TF: 1-855 85 KUZCO F: 604 538 7196  
W: [kuzcolighting.com](http://kuzcolighting.com)  
20241010