# Ceiling LED Pendant

## PD39317-UNV-010

INSTALLATION SHEET

### START FROM HERE

- Make sure POWER is COMPLETELY OFF at the fuse box
- Have your fixture installed by a qualified licensed electrician
- Prepare everything in a clear area
- · Wear gloves at all time during this installation
- · Read instructions carefully before you start assembly
- · Keep this installation sheet for future reference

Technical Support: 1-855-855-8926

#### Please Note:


- This Kuzco LED fixture comes with pre-wired LED module(s)
- Unless instructed, Do Not touch any part of the LED module(s) as any unnecessary contact with the module could cause permanent damage
- Use ELV (Electronic Low Voltage) or TRIAC or 0-10V type of dimmer for dimming application
- 120-277V input


1. Remove fixture from its original package


- 2. Separate mounting plate (1c) from canopy (2a) by removing canopy screws (2b) and separate non-power mounting plate (3c) from non-power canopy (5a) by removing screws (5b)
- 3. Attach mounting plate (1c) to electrical junction box (1a) using junction box screws provided (1e) in hardware package. Secure non-power mounting plate (3c) to non-power junction box (3a) with screws (3e)
- **4.** Secure mounting plate (1c) to mounting surface with screws (1g) and anchors (1f)
- 5. Make proper electrical connections (black to hot "L", white to neutral "N", green to "GND", Dim + to purple, Dim- to gray) with wire nuts provided in hardware package
- **6.** Slide diffuser (6a) over LED module (6c) of rope segment. Secure diffuser (6a) with connector (6b) on rope segment and thread clockwise to secure (See Illustration 1)
- Attach canopy (2a) to mounting plate (1c) with canopy screws (2b). Secure non-power canopy (5a) to non-power mounting plate (3c) with screws (5b)

| Wires                    |  |
|--------------------------|--|
| Hot (Black)              |  |
| Neutral (White)          |  |
| Ground (Green)           |  |
| Dim - (Gray): Optional   |  |
| Dim + (Purple): Optional |  |

#### **Powered**



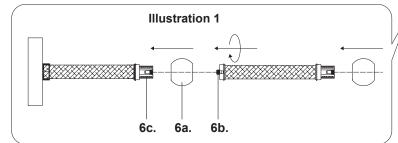



Non-Powered



