



DRAIN FITTINGS

DRAIN FITTINGS

Condensation within an electrical enclosure is a common and potentially dangerous occurrence. To fight this problem, Remke Drain Fittings are installed at the bottom of the enclosures or in a lower section of the conduit system to drain away moisture caused by condensation. These fittings provide continuous ventilation for the prevention and/or release of condensation when properly installed in the appropriate location.

Offered in 1/2 and 3/4 inch NPT sizes, Remke Drain Fittings are precision machined of high-quality stainless steel, steel or aluminum to assure a long service life. These drain fittings are also installed in hubs or drilled & tapped openings and are easy to remove and install for maintenance.




SPECIFICATIONS

Enclosure	NEMA 3R
UL Standard	514B
Standard Materials	Bodies & nuts - aluminum, steel or stainless steel Screen - stainless steel
Country of Origin	USA

ORDERING CHART

DRAIN FITTINGS		
Thread Size	Material	Part Number
1/2 NPT	Aluminum	RDC50A
1/2 NPT	Steel	RDC50S
1/2 NPT	Stainless Steel	RDC50SS
3/4 NPT	Aluminum	RDC75A
3/4 NPT	Steel	RDC75S
3/4 NPT	Stainless Steel	RDC75SS

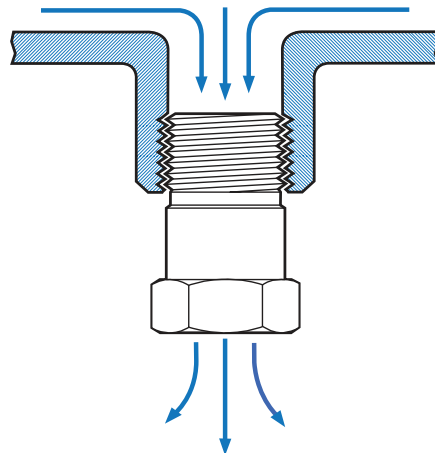

DRAIN FITTINGS

Drain Fittings are usually installed at the bottom of the cord grip/ enclosure to drain moisture caused by condensation.