


Serenity Progressive Wall Basin Mixer 160/185/220mm Spout

Nero




Lead Free

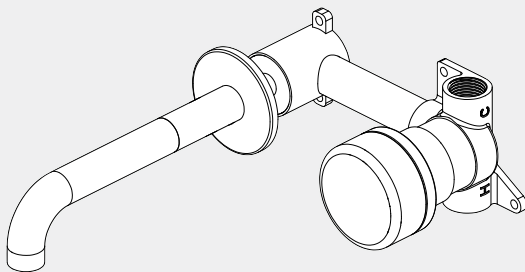

Versions:202412



Drawing

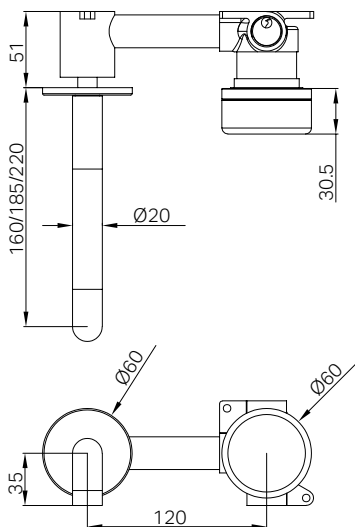

Specifications

Watermark License

WM-060073

Temperature Rating

Min 1°C-Max 75°C

Pressure Rating

Min 150kpa - Max 500kpa

Group Item

- 1 x Serenity Progressive Wall Basin Mixer Body Only, SKU:24C022
- 1 x Serenity Progressive Wall Basin Mixer 160/185/220mm Spout Trim Kits Only

*This product is packaged separately.

*Dimensions are nominal measurements only

**Includes an additional non-restricting aerator for bath use



Chrome



Gun Metal



Brushed Bronze



Matte Black



Brushed Gold



Brushed Nickel

Serenity Progressive Wall Basin Mixer 160mm Spout With Carrara Handle

24E061BZ/ 24E061BG / 24E061BN/24E061GM / 24E061MB / 24E061CH

Serenity Progressive Wall Basin Mixer 160mm Spout With Verde Alpi Handle

24E062BZ/ 24E062BG / 24E062BN/24E062GM / 24E062MB / 24E062CH

Serenity Progressive Wall Basin Mixer 160mm Spout With Rome Travertine Handle

24E063BZ/ 24E063BG / 24E063BN/24E063GM / 24E063MB / 24E063CH

Serenity Progressive Wall Basin Mixer 160mm Spout With Arabescato Corchia Handle

24E064BZ/ 24E064BG / 24E064BN/24E064GM / 24E064MB / 24E064CH

Serenity Progressive Wall Basin Mixer 160mm Spout With Calacatta Viola Handle

24E065BZ/ 24E065BG / 24E065BN/24E065GM / 24E065MB / 24E065CH

Serenity Progressive Wall Basin Mixer 160mm Spout With Metal Handle

24E066BZ/ 24E066BG / 24E066BN/24E066GM / 24E066MB / 24E066CH

Serenity Progressive Wall Basin Mixer 160mm Spout With Marquina Black Handle

24E138BZ/ 24E138BG / 24E138BN/24E138GM / 24E138MB / 24E138CH

Serenity Progressive Wall Basin Mixer 185mm Spout With Carrara Handle

24E067BZ/ 24E067BG / 24E067BN/24E067GM / 24E067MB / 24E067CH

Serenity Progressive Wall Basin Mixer 185mm Spout With Verde Alpi Handle

24E068BZ/ 24E068BG / 24E068BN/24E068GM / 24E068MB / 24E068CH

Serenity Progressive Wall Basin Mixer 185mm Spout With Rome Travertine Handle

24E069BZ/ 24E069BG / 24E069BN/24E069GM / 24E069MB / 24E069CH

Serenity Progressive Wall Basin Mixer 185mm Spout With Arabescato Corchia Handle

24E070BZ/ 24E070BG / 24E070BN/24E070GM / 24E070MB / 24E070CH

Serenity Progressive Wall Basin Mixer 185mm Spout With Calacatta Viola Handle

24E071BZ/ 24E071BG / 24E071BN/24E071GM / 24E071MB / 24E071CH

Serenity Progressive Wall Basin Mixer 185mm Spout With Metal Handle

24E072BZ/ 24E072BG / 24E072BN/24E072GM / 24E072MB / 24E072CH

Serenity Progressive Wall Basin Mixer 185mm Spout With Marquina Black Handle

24E139BZ/ 24E139BG / 24E139BN/24E139GM / 24E139MB / 24E139CH

Serenity Progressive Wall Basin Mixer 220mm Spout With Carrara Handle

24E073BZ/ 24E073BG / 24E073BN/24E073GM / 24E073MB / 24E073CH

Serenity Progressive Wall Basin Mixer 220mm Spout With Verde Alpi Handle

24E074BZ/ 24E074BG / 24E074BN/24E074GM / 24E074MB / 24E074CH

Serenity Progressive Wall Basin Mixer 220mm Spout With Rome Travertine Handle

24E075BZ/ 24E075BG / 24E075BN/24E075GM / 24E075MB / 24E075CH

Serenity Progressive Wall Basin Mixer 220mm Spout With Arabescato Corchia Handle

24E076BZ/ 24E076BG / 24E076BN/24E076GM / 24E076MB / 24E076CH

Serenity Progressive Wall Basin Mixer 220mm Spout With Calacatta Viola Handle

24E077BZ/ 24E077BG / 24E077BN/24E077GM / 24E077MB / 24E077CH

Serenity Progressive Wall Basin Mixer 220mm Spout With Metal Handle

24E078BZ/ 24E078BG / 24E078BN/24E078GM / 24E078MB / 24E078CH

Serenity Progressive Wall Basin Mixer 220mm Spout With Marquina Black Handle

24E140BZ/ 24E140BG / 24E140BN/24E140GM / 24E140MB / 24E140CH

GENERAL INSTRUCTIONS:

- This product must be installed by a licensed plumber. Ensure that the installation complies with the Australian/New Zealand Standard AS/NZS 3500.
- All pipework must be thoroughly flushed prior to the installation of the mixer. In-line filters must be fitted on both hot and cold supplies to prevent foreign particles from damaging the ceramic cartridge.
- All outlets used primarily for personal hygiene must deliver water at a safe temperature in accordance with regional regulations.

NOTE:

- Do not hydrostatic test the installation with this mixer installed. Damage to the ceramic cartridge may occur.
- Do not remove the ceramic cartridge from the mixer when installing.
- After installation, all connections must be checked for leaks.
- This mixer is not recommended for use in uncontrolled heating systems such as wet-backs or solar heating units unless a suitable tempering valve is fitted.
- If limited water flow is experienced, locate aerator and filter washers and clean away foreign material as required.
- It is the responsibility of the plumber to ensure a waterproof seal is achieved between the product and mounting surface. If in doubt about the quality of the seal, remove the product and reinstall.

MAINTENANCE AND CARE:


- Regularly check the mixer and connections for signs of wear or leaks.
- Clean the tap with mild soapy water to maintain its appearance, avoiding harsh chemicals and abrasive materials that may damage the finish.

FINAL INSPECTION:


- Ensure the tap operates smoothly and that there are no leaks at the connections.
- Clean the area and the newly installed tap with a soft cloth to remove any installation residues.

Installation Instruction


For Body Only

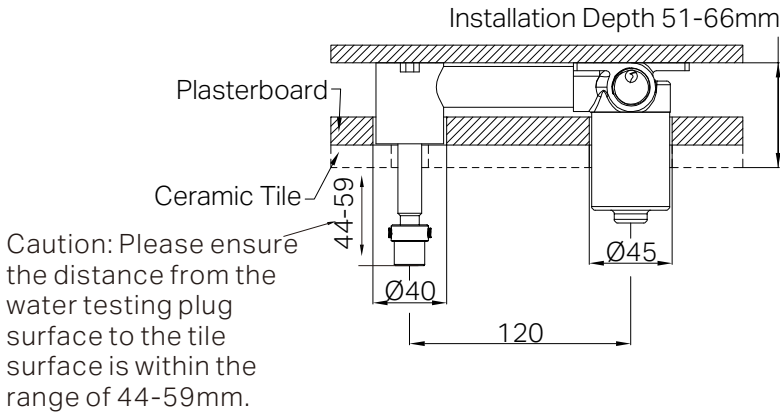


1. Position the mixer body against the nogging and secure it firmly. Ensure the installation depth is 51-66mm from the nogging to the ceramic tile.
2. Connect the cold and hot water supply lines and perform a leak test.
3. Drill one Ø45mm and one Ø40mm holes in the plasterboard as shown in the diagram.

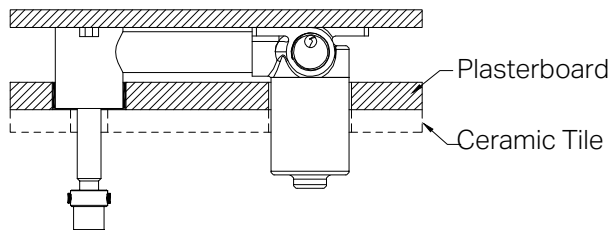


4. Install plasterboard and waterproof the gap between the mixer body and plasterboard.

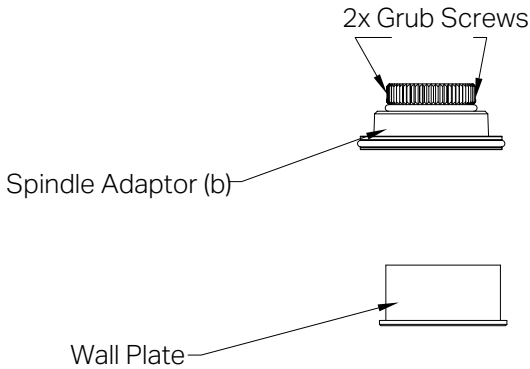


Note: The mixer body package includes one wall plate and one spindle adaptor (b), which are designed to be installed during the installation of the trim kits. The spindle adaptor (b) is equipped with two grub screws to ensure proper alignment and a secure fit.

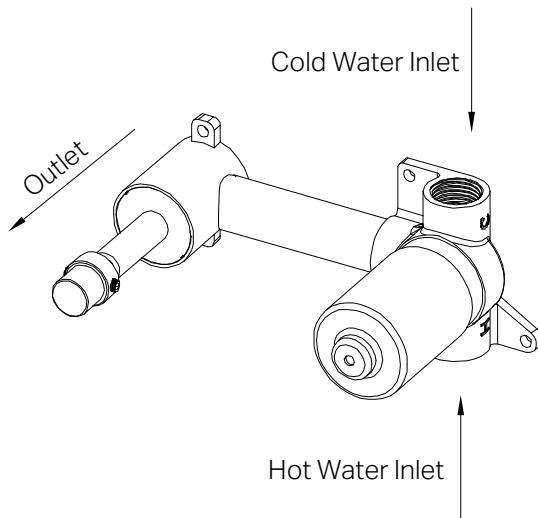


Installation Instruction For Trim Kits Only

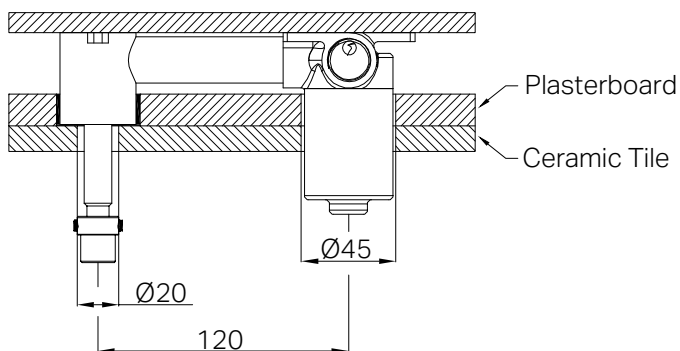


1. Drill an Ø45mm and a Ø20mm holes in the ceramic tile, then position it as shown in the diagram.

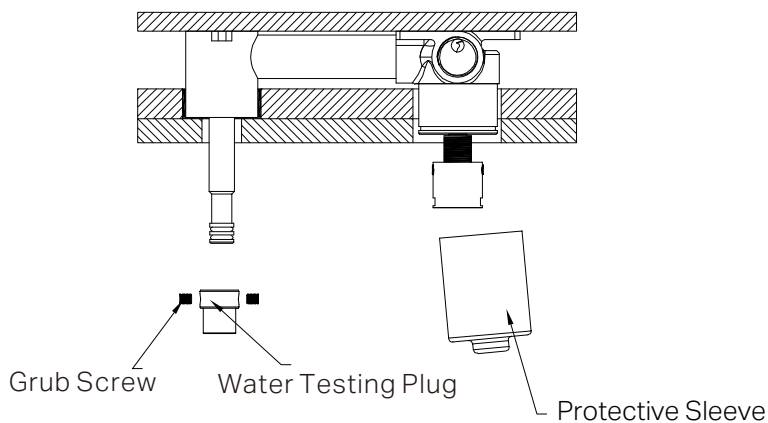


2. Release the grub screw to remove the water testing plug.
3. Remove the protective sleeve.

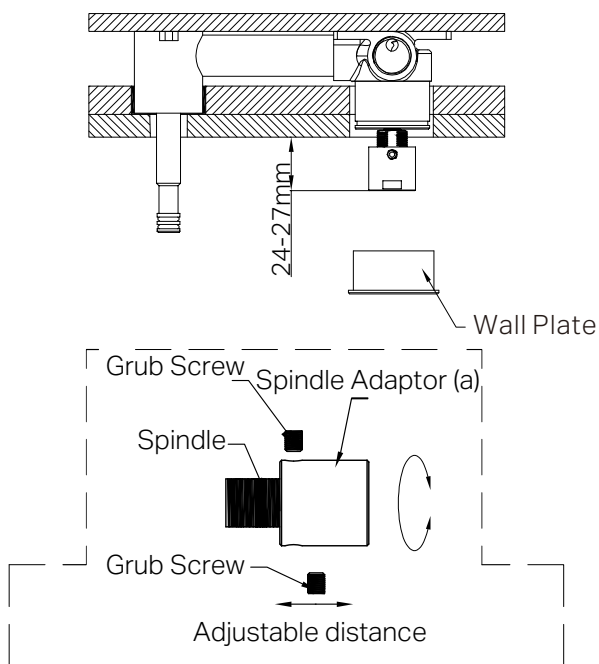

4. Adjust the spindle adaptor (a) to the optimal length, ensuring a distance of 24-27 mm from the tile surface, as shown in the diagram.
 5. Loosen the grub screws to make the adjustment.
- Install the wall plate securely onto the mixer body.

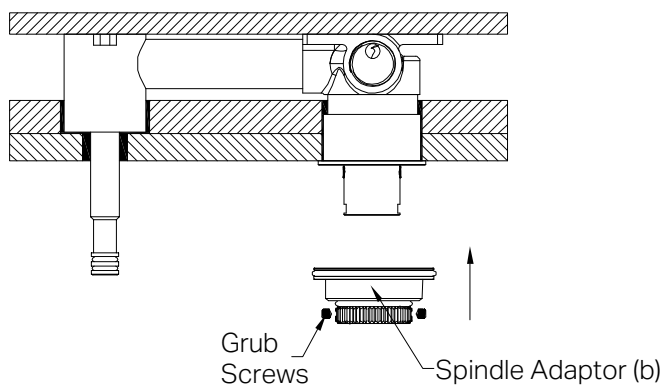

6. Use silicone sealant to seal the gap between the tile, water outlet, and wall plate.
7. Attach the spindle adaptor (b) to the spindle Adaptor (a) and tighten the grub screws firmly to secure it.

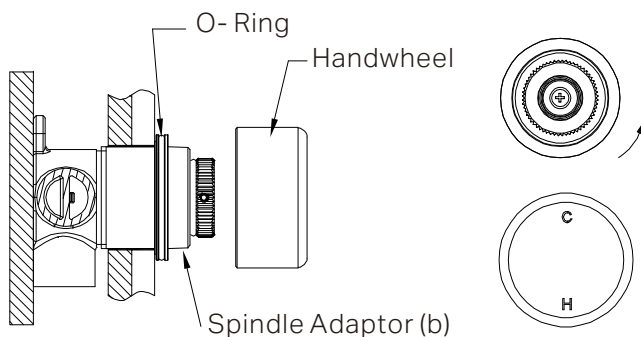

8. Apply lubrication evenly to the O-Ring. Refer to the diagram to identify the correct O-Ring position. Ensure the O-Ring is well-lubricated to prevent damage during installation.

For Metal Handwheel:

Rotate the spindle adaptor (b) counterclockwise to its fully closed position. Refer to the diagram for clarification.

For Marble Handwheel:

No adjustment to the spindle adaptor (b) is necessary.

Align the Handwheel with the spindle adaptor (b):


Ensure the spline on the underside of the handwheel align perfectly with the gears on the spindle adaptor (b), as shown in the above diagram. This alignment is crucial for proper functionality.

Secure the Handwheel:


Once aligned, press the handwheel down firmly onto the spindle adaptor (b).

Tip:

For metal handwheels, ensure the handwheel installed as shown in above on the diagram.

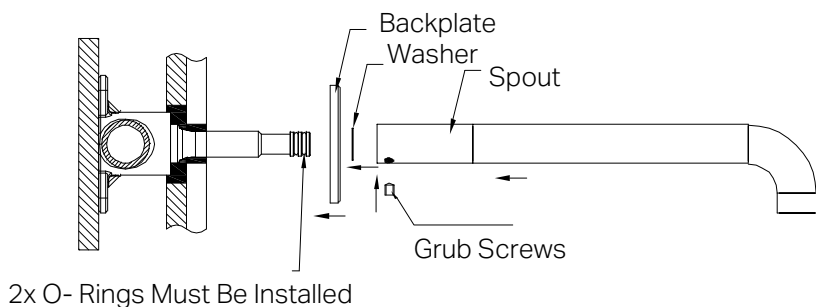

9. Ensure the spout is aligned and secure it firmly using the supplied two grub screws and ensure that O-rings are properly seated.

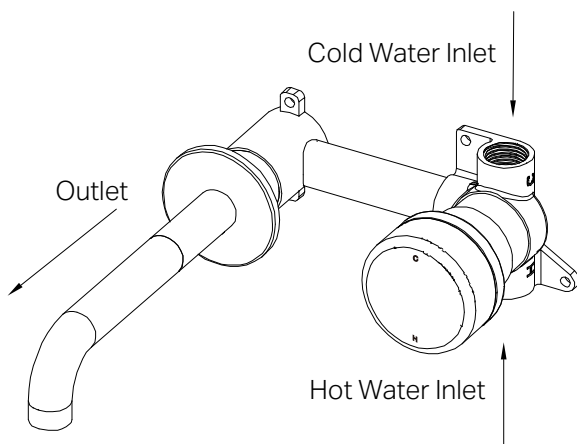

10. Turn on the drainage system and water supply, and inspect all connections for any signs of leakage.

Note: If you bought marble handwheel product, there are no hot/cold markings are applied to the handwheel.

Nero



Lead Free

