


Serenity Wall Basin Set 160/185/220mm Spout

Nero




Lead Free

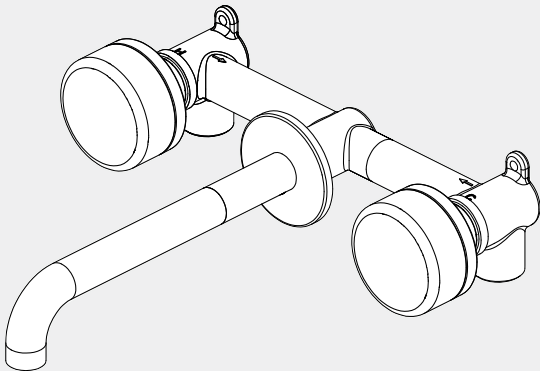

Versions:202412

Drawing

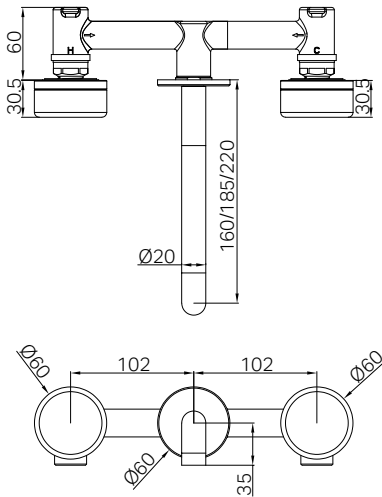

Specifications

Watermark License

WM-060073

Temperature Rating

Min 1°C-Max 75°C

Pressure Rating

Min 150kpa - Max 500kpa


Group Item

1 x Serenity Wall Basin Set Body Only, SKU:24C020
1 x Serenity Wall Basin Set 160/185/220mm Spout
Trim Kits Only

*This product is packaged separately.

*Dimensions are nominal measurements only

**Includes an additional non-restricting aerator for bath use

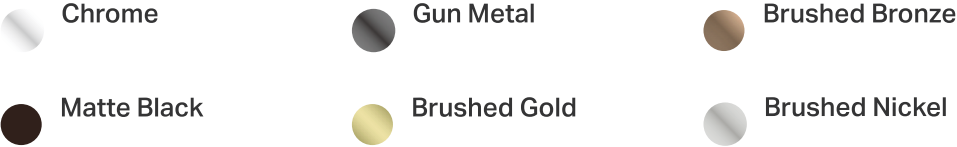

Serenity Wall Basin Set 160mm Spout With Carrara Handle

24D035BZ/ 24D035BG / 24D035BN/24D035GM / 24D035MB / 24D035CH

Serenity Wall Basin Set 160mm Spout With Verde Alpi Handle

24D036BZ/ 24D036BG / 24D036BN/24D036GM / 24D036MB / 24D036CH

Serenity Wall Basin Set 160mm Spout With Rome Travertine Handle

24D037BZ/ 24D037BG / 24D037BN/24D037GM / 24D037MB / 24D037CH

Serenity Wall Basin Set 160mm Spout With Arabescato Corchia Handle

24D038BZ/ 24D038BG / 24D038BN/24D038GM / 24D038MB / 24D038CH

Serenity Wall Basin Set 160mm Spout With Calacatta Viola Handle

24D039BZ/ 24D039BG / 24D039BN/24D039GM / 24D039MB / 24D039CH

Serenity Wall Basin Set 160mm Spout With Metal Handle

24D040BZ/ 24D040BG / 24D040BN/24D040GM / 24D040MB / 24D040CH

Serenity Wall Basin Set 160mm Spout With Marquina Black Handle

24D121BZ/ 24D121BG / 24D121BN/24D121GM / 24D121MB / 24D121CH

Serenity Wall Basin Set 185mm Spout With Carrara Handle

24D041BZ/ 24D041BG / 24D041BN/24D041GM / 24D041MB / 24D041CH

Serenity Wall Basin Set 185mm Spout With Verde Alpi Handle

24D042BZ/ 24D042BG / 24D042BN/24D042GM / 24D042MB / 24D042CH

Serenity Wall Basin Set 185mm Spout With Rome Travertine Handle

24D043BZ/ 24D043BG / 24D043BN/24D043GM / 24D043MB / 24D043CH

Serenity Wall Basin Set 185mm Spout With Arabescato Corchia Handle

24D044BZ/ 24D044BG / 24D044BN/24D044GM / 24D044MB / 24D044CH

Serenity Wall Basin Set 185mm Spout With Calacatta Viola Handle

24D045BZ/ 24D045BG / 24D045BN/24D045GM / 24D045MB / 24D045CH

Serenity Wall Basin Set 185mm Spout With Metal Handle

24D046BZ/ 24D046BG / 24D046BN/24D046GM / 24D046MB / 24D046CH

Serenity Wall Basin Set 185mm Spout With Marquina Black Handle

24D122BZ/ 24D122BG / 24D122BN/24D122GM / 24D122MB / 24D122CH

Serenity Wall Basin Set 220mm Spout With Carrara Handle

24D047BZ/ 24D047BG / 24D047BN/24D047GM / 24D047MB / 24D047CH

Serenity Wall Basin Set 220mm Spout With Verde Alpi Handle

24D048BZ/ 24D048BG / 24D048BN/24D048GM / 24D048MB / 24D048CH

Serenity Wall Basin Set 220mm Spout With Rome Travertine Handle

24D049BZ/ 24D049BG / 24D049BN/24D049GM / 24D049MB / 24D049CH

Serenity Wall Basin Set 220mm Spout With Arabescato Corchia Handle

24D050BZ/ 24D050BG / 24D050BN/24D050GM / 24D050MB / 24D050CH

Serenity Wall Basin Set 220mm Spout With Calacatta Viola Handle

24D051BZ/ 24D051BG / 24D051BN/24D051GM / 24D051MB / 24D051CH

Serenity Wall Basin Set 220mm Spout With Metal Handle

24D052BZ/ 24D052BG / 24D052BN/24D052GM / 24D052MB / 24D052CH

Serenity Wall Basin Set 220mm Spout With Marquina Black Handle

24D123BZ/ 24D123BG / 24D123BN/24D123GM / 24D123MB / 24D123CH

GENERAL INSTRUCTIONS:

- This product must be installed by a licensed plumber. Ensure that the installation complies with the Australian/New Zealand Standard AS/NZS 3500.
- All pipework must be thoroughly flushed prior to the installation of the mixer. In-line filters must be fitted on both hot and cold supplies to prevent foreign particles from damaging the ceramic cartridge.
- All outlets used primarily for personal hygiene must deliver water at a safe temperature in accordance with regional regulations.

NOTE:

- Do not hydrostatic test the installation with this mixer installed. Damage to the ceramic cartridge may occur.
- Do not remove the ceramic cartridge from the mixer when installing.
- After installation, all connections must be checked for leaks.
- This mixer is not recommended for use in uncontrolled heating systems such as wet-backs or solar heating units unless a suitable tempering valve is fitted.
- If limited water flow is experienced, locate aerator and filter washers and clean away foreign material as required.
- It is the responsibility of the plumber to ensure a waterproof seal is achieved between the product and mounting surface. If in doubt about the quality of the seal, remove the product and reinstall.

MAINTENANCE AND CARE:


- Regularly check the mixer and connections for signs of wear or leaks.
- Clean the tap with mild soapy water to maintain its appearance, avoiding harsh chemicals and abrasive materials that may damage the finish.

FINAL INSPECTION:


- Ensure the tap operates smoothly and that there are no leaks at the connections.
- Clean the area and the newly installed tap with a soft cloth to remove any installation residues.

Installation Instruction


For Body Only

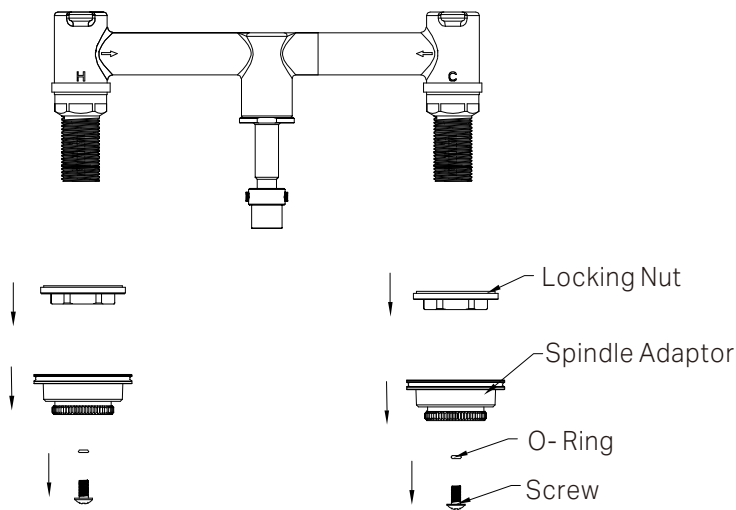


1. Remove the components from spindle as shown in the provided diagram. Ensure all parts are removed gently to avoid damage to the components or threads.

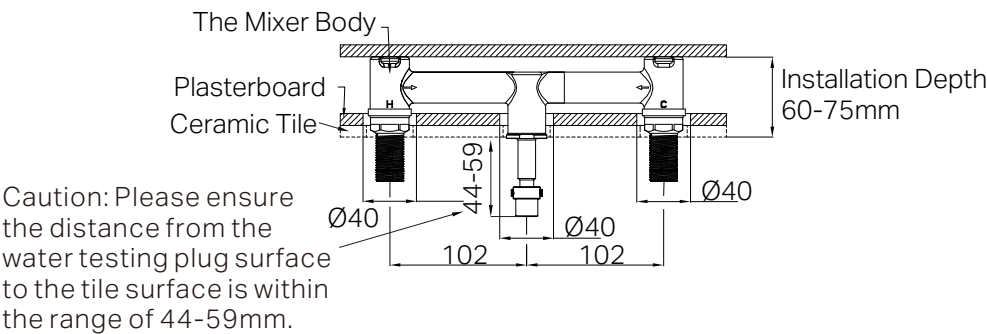

2. Position the mixer body against the nogging and secure it firmly. Ensure the installation depth is 60–75mm from the nogging to the ceramic tile.
3. Connect the cold and hot water supply lines and perform a leak test.
4. Drill three Ø40mm holes in the plasterboard as shown in the diagram.

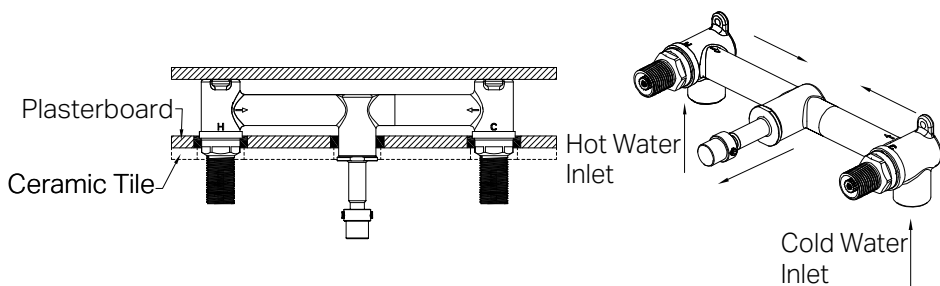


5. Install plasterboard and waterproof the gap between the mixer body and plasterboard.

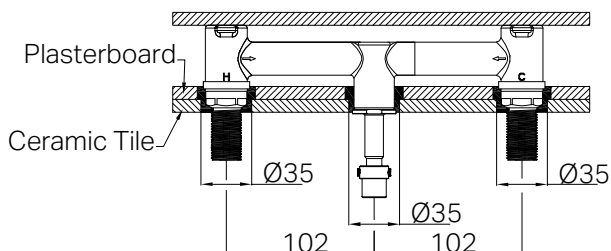

6. Drill three Ø35mm holes in the ceramic tile aligned with the plasterboard cutouts.


7. Position the ceramic tile precisely and waterproof the junction between the mixer body.

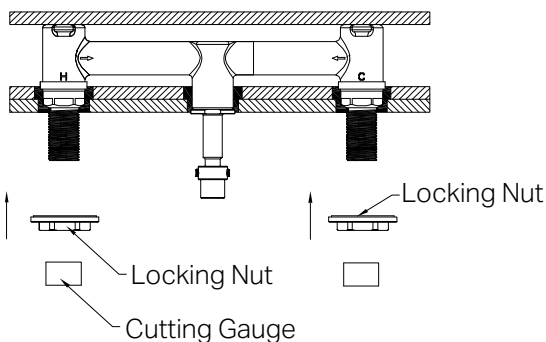


8. Reattach the locking nuts onto the spindle.

Note: Use the provided washers to achieve a secure and watertight connection.

9. Attach the cutting gauges to the spindle.

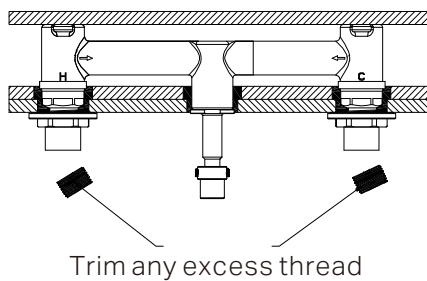


10. Trim any excess thread. Remove the cutting gauges after this step.

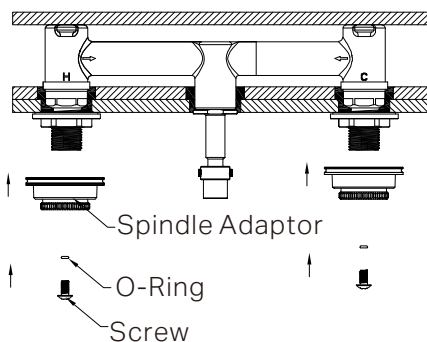


11. Install the spindle adaptors onto the spindles. Tighten the spindles securely using screws, ensuring that O-rings are properly seated.


Installation Instruction For Trim Kits Only

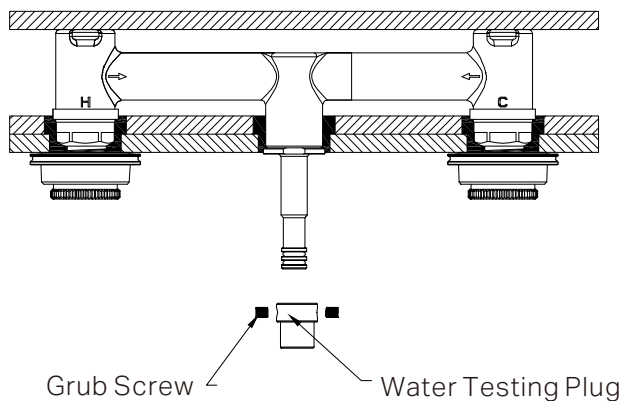

1. Release the grub screws to remove the water testing plug.

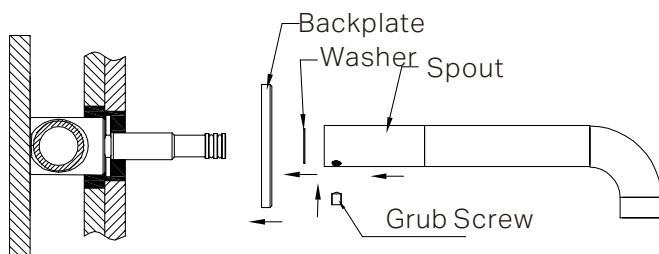

2. Slide the backplate and washer onto the wall.
Ensure the spout is aligned and secure it firmly using the supplied grub screw.

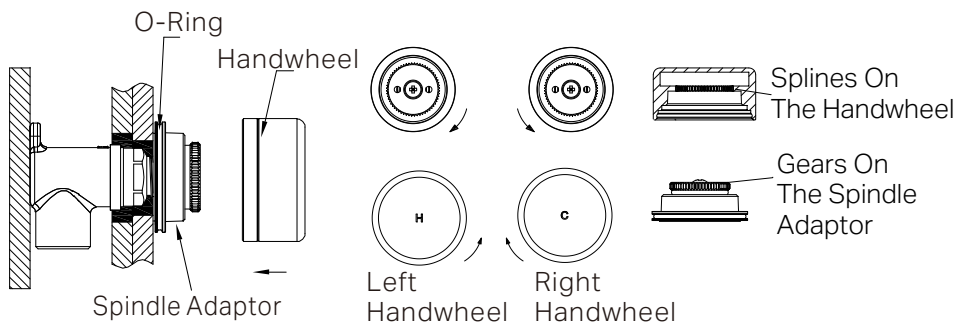

3. Apply lubrication evenly to the O-Ring. Refer to the diagram to identify the correct O-Ring position. Ensure the O-Ring is well-lubricated to prevent damage during installation.

For Metal Handwheels:

Rotate the left spindle adaptor clockwise to its fully closed position.

Rotate the right spindle adaptor counterclockwise to its fully closed position.

Refer to the diagram for clarification.

For Marble Handwheels:

No adjustment to the spindle adaptor is necessary.

Align the Handwheel with the Spindle Adaptor:

Ensure the spline on the underside of the handwheel align perfectly with the gears on the spindle adaptor, as shown in the above diagram.


This alignment is crucial for proper functionality.

Secure the Handwheel:

Once aligned, press the handwheel down firmly onto the spindle adaptor.

Tip:

For metal handwheels, ensure the handwheel marked "H" is installed on the left side and the handwheel marked "C" is installed on the right side.

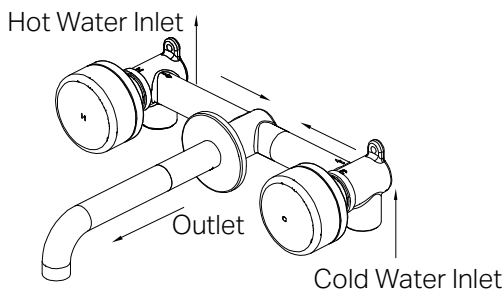

4. Turn on the drainage system and water supply, and inspect all connections for any signs of leakage.

Note: If you bought marble handwheel product, there are no hot/cold markings are applied to the handwheels.

Nero



Lead Free

