



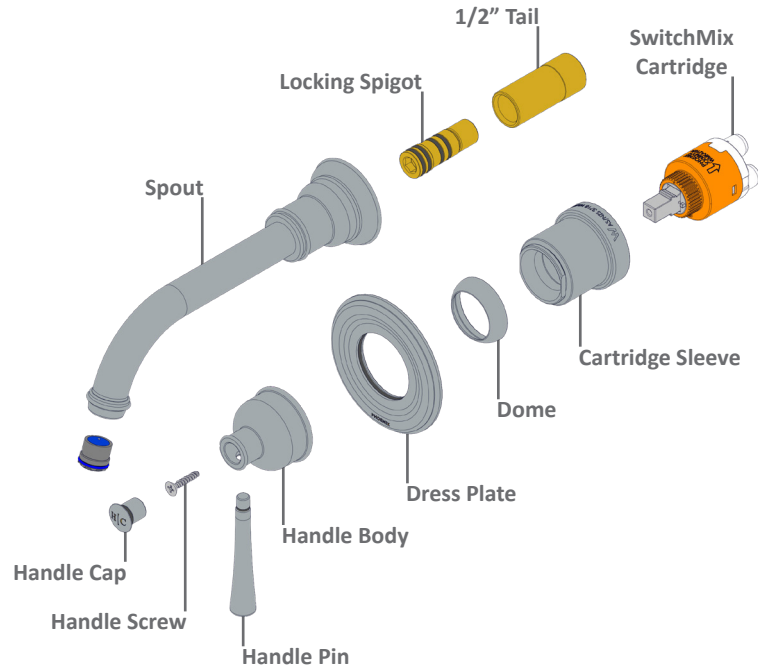


1

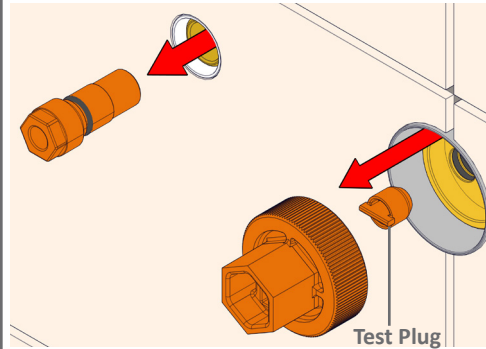

Remove Test Caps with a flat head screwdriver and spanner.

Ensure that no Test Plugs are in Body.


2

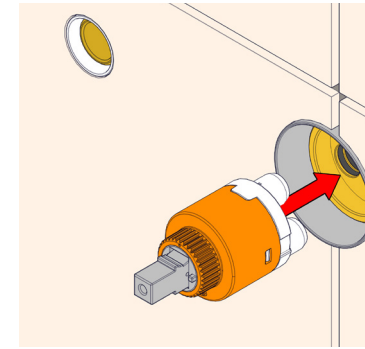

Add grease or soap to Cartridge Legs. Push Cartridge gently Into Body. Ensure correct orientation.


Cartridge only fits in one orientation.

3

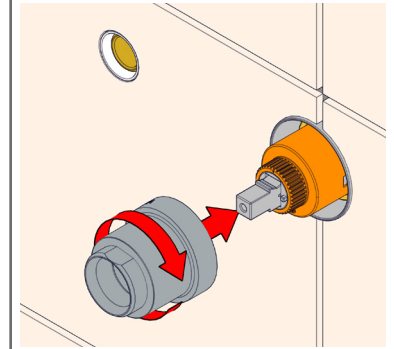

Firmly fasten Cartridge Sleeve to Mixer Body using a shifting spanner.


4

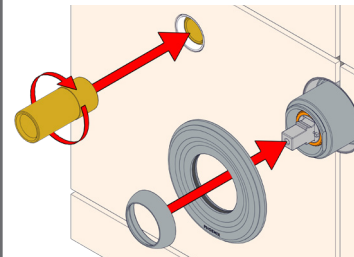

Gently push Dress Plate and screw on the Dome over Cartridge Sleeve.

Hand tighten the 1/2" Threaded Tail into the rough in.

5

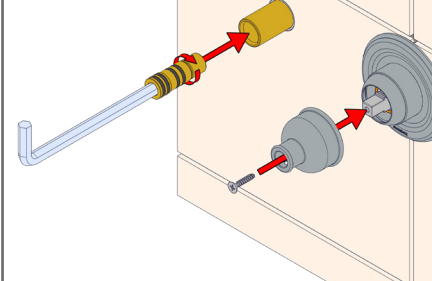


Insert the Locking Spigot into the 1/2" Threaded Tail, tightening with an 8mm Hex Key.

Attach the Handle body onto the SwitchMix Cartridge with provided screw.

DO NOT OVERTIGHTEN.

6

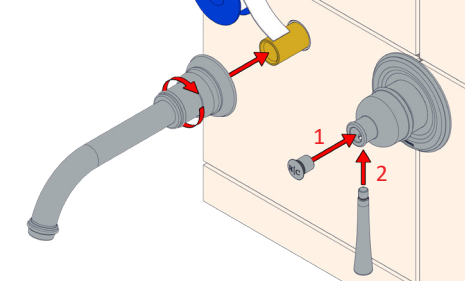

Apply Teflon Tape to the 1/2" Threaded Tail.

Screw Spout onto the 1/2" Threaded Tail.

Insert the Handle Cap into the Handle Body, then thread the Handle Pin into the Cap.

Test and check for leaks.



recommended
working pressure
150-500KPa
maximum hot
water temperature
75 degrees

NOTE:

- If the pressure exceeds or is likely to exceed 550kpa, an approved pressure limiting device must be installed.
- Flush out all pipe work prior to installation.
- If the water temperature exceeds 75°C, an approved tempering valve must be fitted.
- Installation should comply with Australian standard AS3500.1 or relevant local authority requirements. Showers may not be suitable for use within:
 - Gravity-fed water systems

- Some instantaneous hot water systems; or
 - Pressure supply less than 150kPa;
- NOTE: The 500kPa maximum water supply pressure does not apply to fire service outlets.

Failure to comply with the above may void all warranties.

WARRANTY:

Please refer to the full warranty statement enclosed with the product before installing.

MAINTENANCE AND CARE:

- Chrome plated surfaces should be cleaned with mild liquid detergent or soap and water.
- Do not use cream cleaners or citrus based cleaning products, as they are abrasive.
- Use of unsuitable cleaning agents may damage the surface. Any damage caused in this way will not be covered by warranty.

DISCLAIMER:

While we aim to ensure the specifications shown are correct at the time of printing, we reserve the right to make modifications without prior notice. Always use the physical product measurements for mark-ups and roughing-in as the line drawing shown may differ from the actual product over time.

*All measurements are shown in millimeters.