
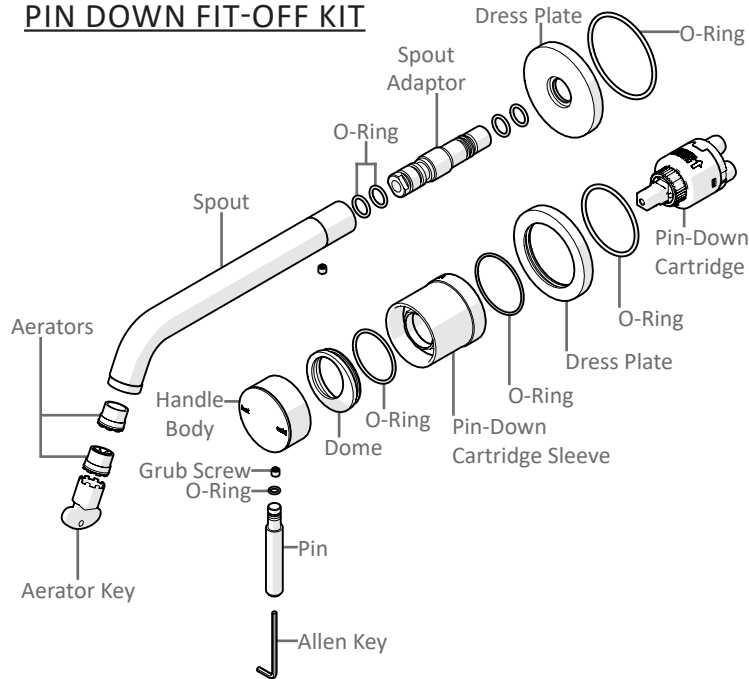


PIN DOWN FIT-OFF KIT

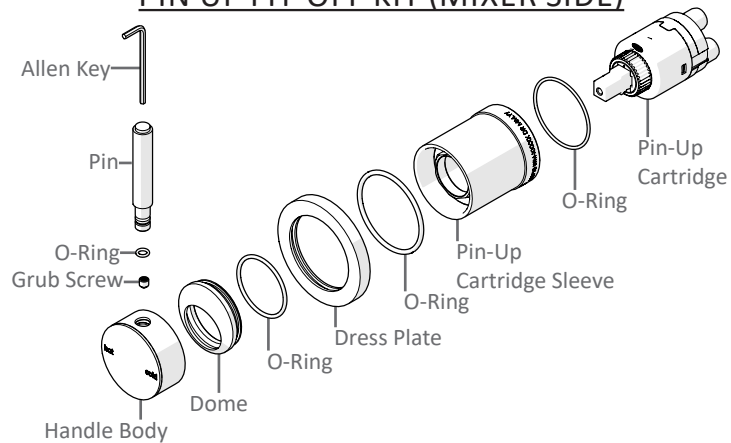

PIN UP FIT-OFF KIT (MIXER SIDE)

recommended
working pressure

150-
500KPa



75
degrees

NOTE:

- If the pressure exceeds or is likely to exceed 550kpa, an approved pressure limiting device must be installed.
 - Flush out all pipe work prior to installation.
 - If the water temperature exceeds 75°C, an approved tempering valve must be fitted.
 - Installation should comply with Australian standard AS3500.1 or relevant local authority requirements.
- Showers may not be suitable for use with:
- Gravity-fed water systems
 - Some instantaneous hot water systems; or


- Pressure supply less than 150kPa;
NOTE: The 500kPa maximum water supply pressure does not apply to fire service outlets.

For tapware, any flow controller incorporated in the outlet to be tightened to prevent removal by hand. As Per AS3718

Failure to comply with the above may void all warranties.


WARRANTY:

WARRANTY:
Please refer to the full warranty statement
enclosed with the product before installing.

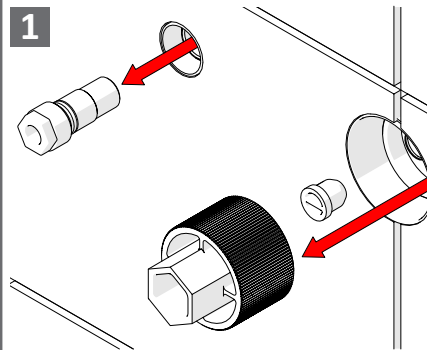

Remove Test Cap using a Flat Head Screw Driver or spanner.


Ensure that no Test Plugs are in Body.

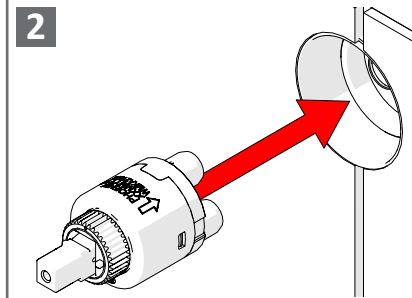

Add Grease or Soap to the three Cartridge legs.

Push Cartridge gently into Body.



Ensure correct orientation. Cartridge only fits in one orientation.

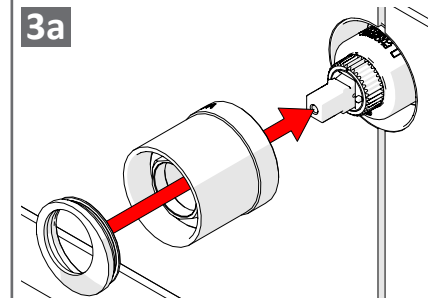


Firmly fasten Cartridge Sleeve to Mixer Body using a tube spanner.

Push Mixer Dome into Cartridge Sleeve.


3b DOME ORIENTATION

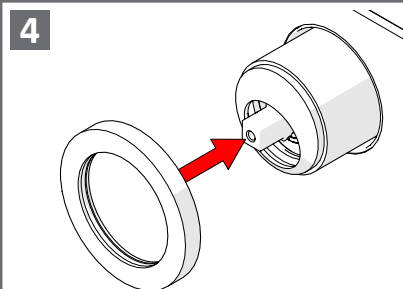

Push Dress Plate over Cartridge Sleeve.

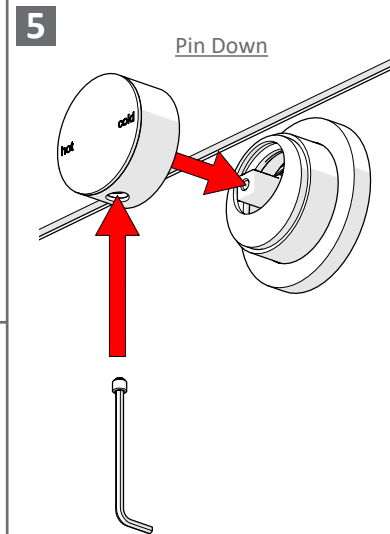

Push Handle Body onto Cartridge.
Tighten Grub Screw inside the Handle
Body securing Handle.

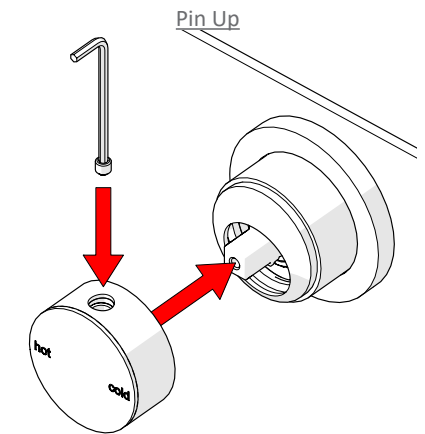

MAINTENANCE AND CARE:

- Chrome plated surfaces should be cleaned with mild liquid detergent or soap and water.
- Do not use cream cleaners or citrus based cleaning products, as they are abrasive.
- Use of unsuitable cleaning agents may damage the surface. Any damage caused in this way will not be covered by warranty.


DISCLAIMER:

While we aim to ensure the specifications shown are correct at the time of printing, we reserve the right to make modifications without prior notice. Always use the physical product measurements for mark-ups and roughing-in as the line drawing shown may differ from the actual product over time.


*All measurements are shown in millimeters.

6

Pin Down

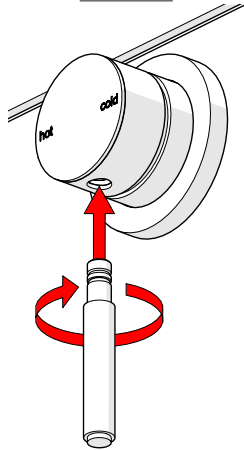


Pin Up

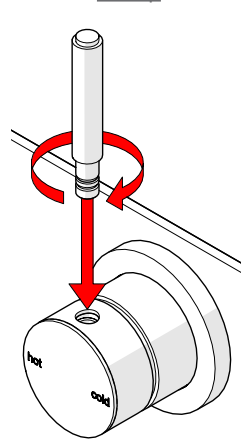

Screw the Pin into the Handle Body, tightening firmly.


7

Screw the Spout Adaptor into the wall, wedging the Dress Plate in between, tightening firmly using a spanner.

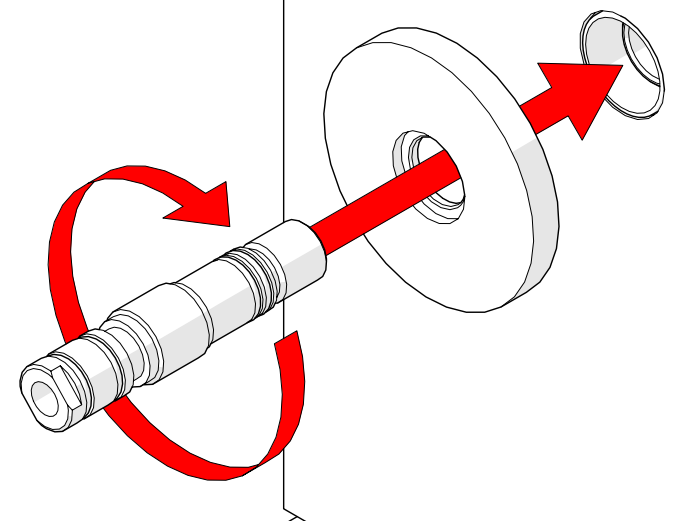


8

Push the Spout onto the Spout Adaptor.

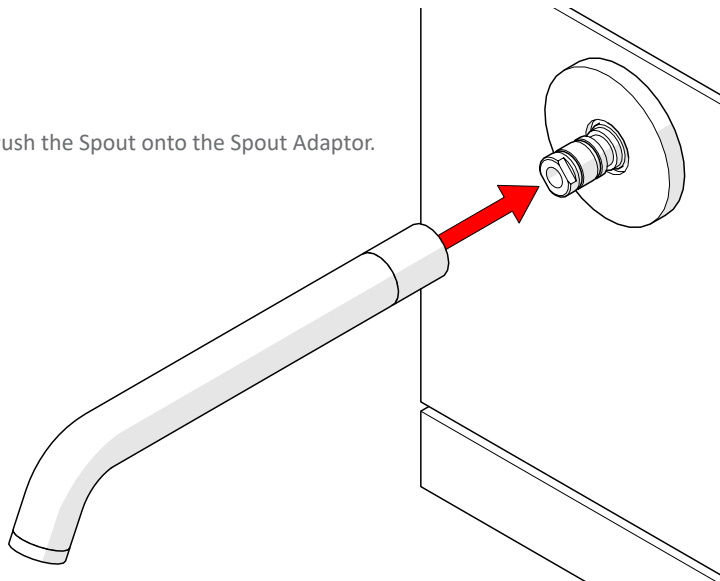


9

Insert Grub Screw into the spout and use an Allen Key to tighten firmly.

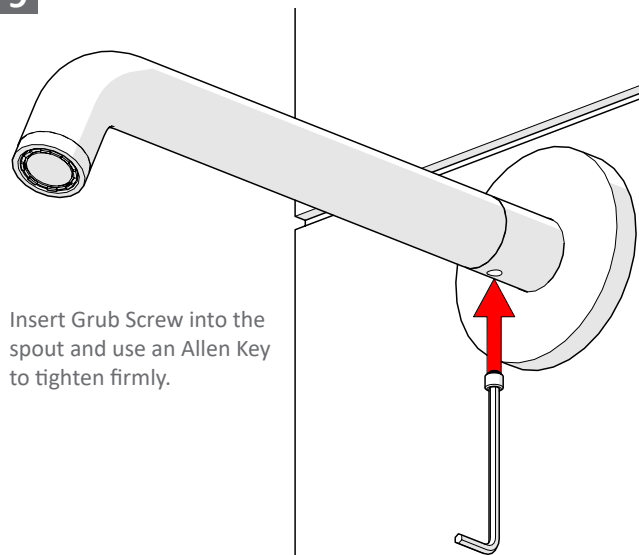

10

Turn on and check for leaks.

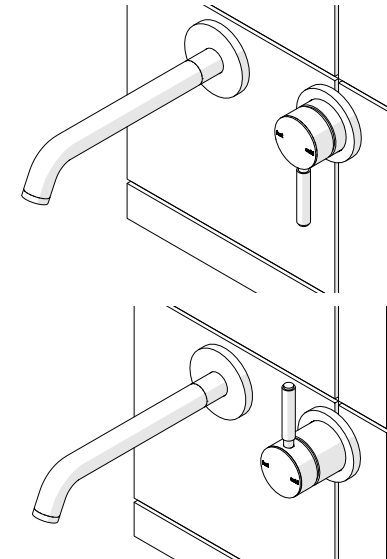

recommended working pressure

150-500KPa

maximum hot water temperature

75 degrees

NOTE:

- If the pressure exceeds or is likely to exceed 550kpa, an approved pressure limiting device must be installed.
- Flush out all pipe work prior to installation.
- If the water temperature exceeds 75°C, an approved tempering valve must be fitted.
- Installation should comply with Australian standard AS3500.1 or relevant local authority requirements. Showers may not be suitable for use within:
 - Gravity-fed water systems
 - Some instantaneous hot water systems; or

- Pressure supply less than 150kPa;

NOTE: The 500kPa maximum water supply pressure does not apply to fire service outlets.

For tapware, any flow controller incorporated in the outlet to be tightened to prevent removal by hand. As Per AS3718

Failure to comply with the above may void all warranties.

WARRANTY:

Please refer to the full warranty statement enclosed with the product before installing.

MAINTENANCE AND CARE:

- Chrome plated surfaces should be cleaned with mild liquid detergent or soap and water.
- Do not use cream cleaners or citrus based cleaning products, as they are abrasive.
- Use of unsuitable cleaning agents may damage the surface. Any damage caused in this way will not be covered by warranty.

DISCLAIMER:

While we aim to ensure the specifications shown are correct at the time of printing, we reserve the right to make modifications without prior notice. Always use the physical product measurements for mark-ups and roughing-in as the line drawing shown may differ from the actual product over time.

*All measurements are shown in millimeters.