



ASSEMBLY INSTRUCTIONS

4652

Wall sconce

Customer Service: (702) 361-4345, (800) 525-2655, customer.services@kalco.com



WARNING:

- 1.If you are unfamiliar with electrical wiring, call a qualified electrician to install this unit. More than one person may be necessary to install fixture, make sure you have enough qualified help.
- 2.Turn off the power to the fixture's circuit at the service panel. Use a voltage detector to verify that the power is off.
- 3.DO NOT install bulb which exceeds the maximum wattage specified on the socket label.
- 4.This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Fixture Assembly :

- 1.Fasten 2 (state specification of screw) into mounting plate so that they extend away from wall when mounting plate is installed.
- 2.Attach the mounting plate to outlet box with screws.
- 3.Refer to wiring diagram.Splice the ribbed side of fixture cord to the white supply wire from outlet box with wire connector. Splice the smooth side of the fixture cord to black supply wire from outlet box with wire connector.
- 4.Carefully tuck in all wires Attach the back plate with the mounting screw on the crossbar.Secure fixture with shell knobs.
- 5.Install E26 bulbs,do not use bulbs that exceeds 60W.
- 6.Install glass shade on the frame.
- 7.Touch any part of the metal frame to adjust light output.

Touch times	1	2	3	4
Brightness	Low	Medium	High	Off

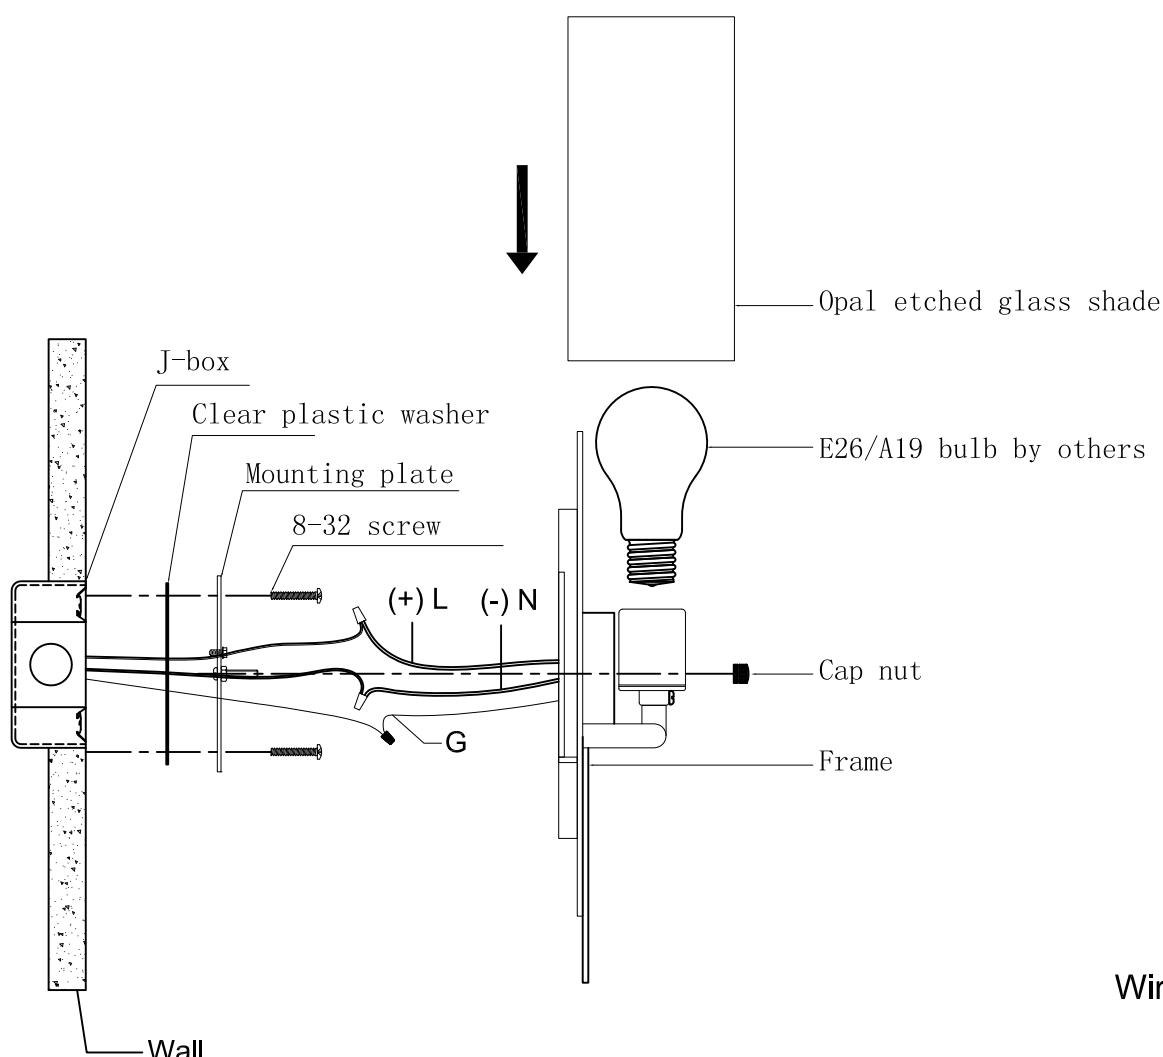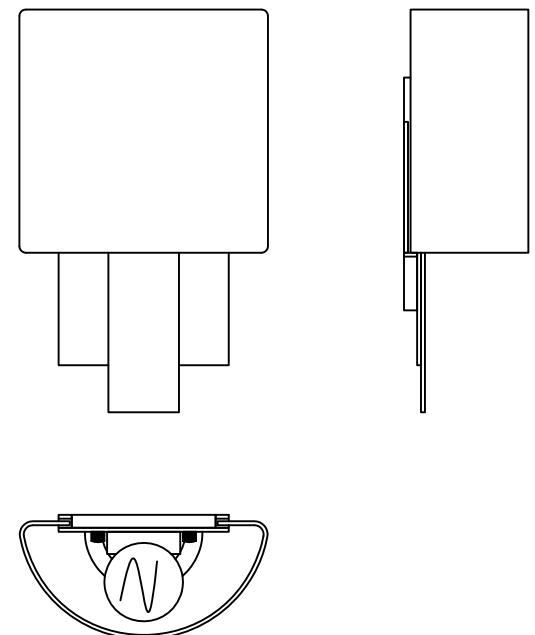

Wiring Diagram

