




## Assembly & Installation Instructions for: 512141PN



Customer Service: (702) 361-4345, (800) 525-2655, [customer.services@kalco.com](mailto:customer.services@kalco.com)

### WARNING - TO REDUCE THE RISK OF FIRE OR INJURY:

- 1.If you are unfamiliar with electrical wiring, call a qualified electrician to install this unit. More than one person may be necessary to install this fixture, make sure you have enough qualified help.
- 2.Turn off the power to the fixture's circuit at the service panel. Use a voltage detector to verify that the power is off.
- 3.DO NOT install bulb exceeding the maximum wattage specified on the socket label.

---

### Fixture Assembly:

---

Step 1. Fasten 2 8-32 screws to mounting plate so that they extend away from the wall when mounting plate is installed

---

Step 2. Attach mounting plate to electrical box using 2 8-32 machine screws


---

Step 3. Raise Canopy to ceiling by nipple

---

Step 4. Fix part #2.#3 to part #1 by using part #4.

---

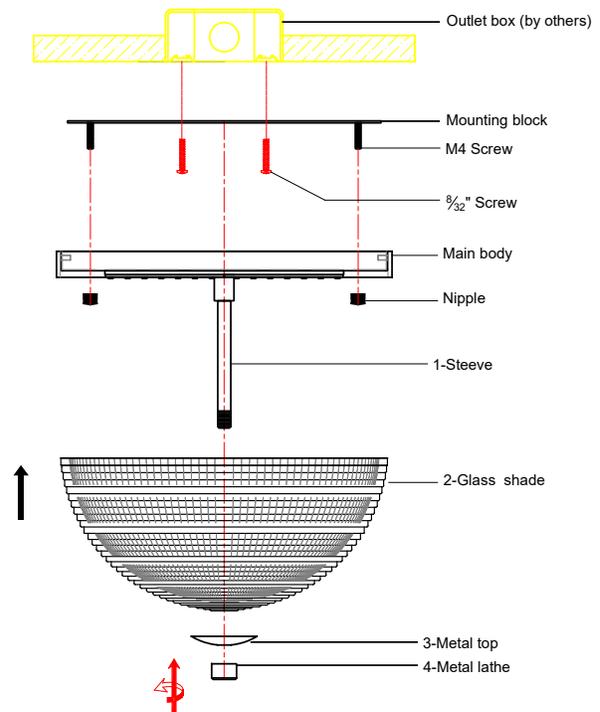



## Assembly & Installation Instructions for: 512141PN

Customer Service: (702) 361-4345, (800) 525-2655, [customer.services@kalco.com](mailto:customer.services@kalco.com)

### Fixture Installation:

Step 5. Fasten 2 (state specification of screw ) into mounting plate so that they extend away from wall when mounting plate is installed

Step 6. Attach the mounting plate to outlet box with screws

Step 7. Refer to wiring diagram.  
Splice the ribbed side of fixture cord to the white supply wire from outlet box with wire connector. Splice the smooth side of the fixture cord to black supply wire from outlet box with wire connector

Step 8. Carefully tuck in all wires Attach the back plate with the mounting screw on the crossbar. Secure fixture with shell knobs.

