



ASSEMBLY & INSTALLATION INSTRUCTIONS

MODEL: 5236700L
32 INCH DIAMETER PENDANT

I M A G E



If you have any questions or problems assembling your fixture please call us for assistance.

Customer Service: (702) 361-4345 or (800) 525-2655

customer.services@kalco.com

WARNING! TO REDUCE THE RISK OF FIRE OR INJURY PLEASE TAKE PRECAUTION AND FOLLOW THE STEPS BELOW.

1. If you are unfamiliar with electrical wiring, call a qualified electrician to install this unit. More than one person may be necessary to install fixture, make sure you have enough qualified help.
2. Turn off the power to the fixture's circuit at the service panel. Use a voltage detector to verify that the power is off.
3. DO NOT install bulb which exceeds the maximum wattage specified on the socket label.

Si vous avez des questions ou des problèmes assemblage de votre dispositif s'il vous plait appel pour l'assistance.

Customer Service: (702) 361-4345 or (800) 525-2655

customer.services@kalco.com


AVERTISSEMENT! POUR RÉDUIRE LES RISQUES D'INCENDIE OU DE BLESSURES S'IL VOUS PLAÎT PRENDRE DES PRÉCAUTIONS ET SUIVEZ LES ÉTAPES CI-DESSOUS.

1. Si vous n'êtes pas familier avec le câblage électrique, appelez un électricien qualifié pour installer cet appareil. Plus d'une personne peut être nécessaire d'installer appareil, assurez vous que vous disposez de l'aide assez qualifié.
2. Coupez l'alimentation au circuit de l'appareil sur le tableau de service. Utiliser un détecteur de tension pour vérifier que l'alimentation est coupée
3. NE PAS installer l'ampoule qui excède la puissance maximale indiquée sur l'étiquette du socket.



*Natural Capiz Edges are Fragile.
Please wear gloves touching natural shells to protect your skin and shells.*

WIRING DIAGRAM

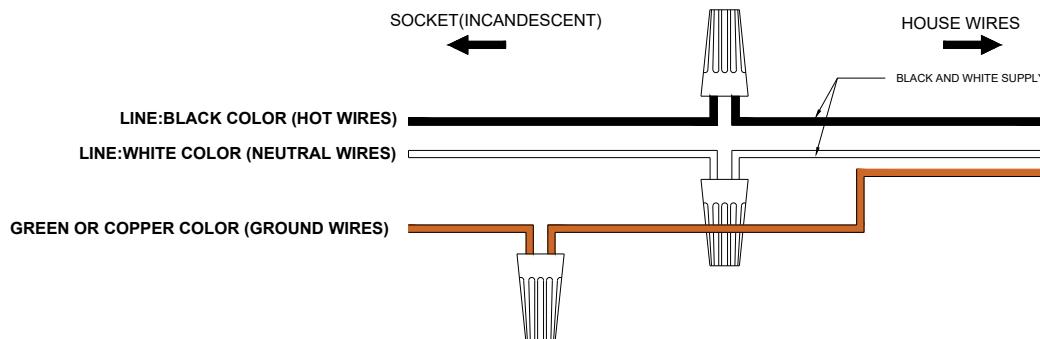



ASSEMBLY & INSTALLATION INSTRUCTIONS

MODEL: 523670OL
32 INCH DIAMETER PENDANT

ELECTRICAL / MOUNTING INSTALLATION

STEP 1: Attach mounting plate to outlet box with the (2) 8-32 x 3/4" screws(provided by other).

STEP 2: Carefully insert the wire through the chain and attach the chain to the main frame as shown.


STEP 3: Determine the required overall fixture height and adjust the chain accordingly. Attach the chain loop at the top end of the chain, unthread the ring and affix the canopy.

STEP 4: Connect bare ground wire from the outlet box (if supplied) with connectors.

STEP 5: Refer to wiring diagram. With wire carefully threaded through the chain connect the black color supply wire to the black color fixture wire with wire connector, connect the white color supply wire to the white fixture wire with wire connector.

STEP 6: Carefully tuck all wires into outlet box ensuring that there are no wires pinched between the canopy and ceiling.

STEP 7: Cap the canopy to the mounting plate, make sure that it rest firmly on the ceiling then lock using the loop ring.

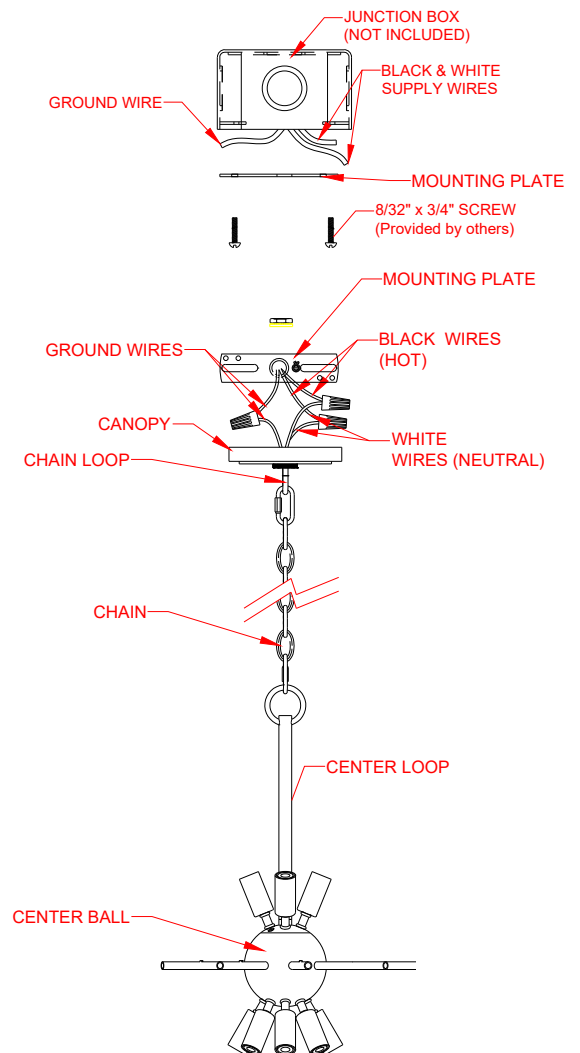

ASSEMBLY & INSTALLATION INSTRUCTIONS


MODEL: 5236700L
32 INCH DIAMETER PENDANT

COMPONENTS ASSEMBLY


STEP 8: Carefully set the Capiz arm (9pcs) to the fixture frame wear cotton gloves then secure it using headless bolt.



*Natural Capiz Edges are Fragile.
Please wear gloves touching natural shells to
protect your skin and shells.*

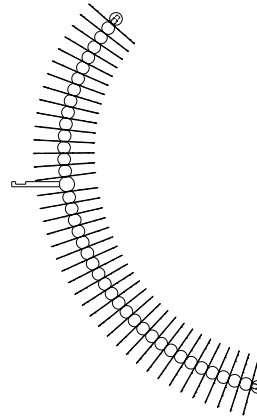

**Note: Natural capiz edges are sharp.*

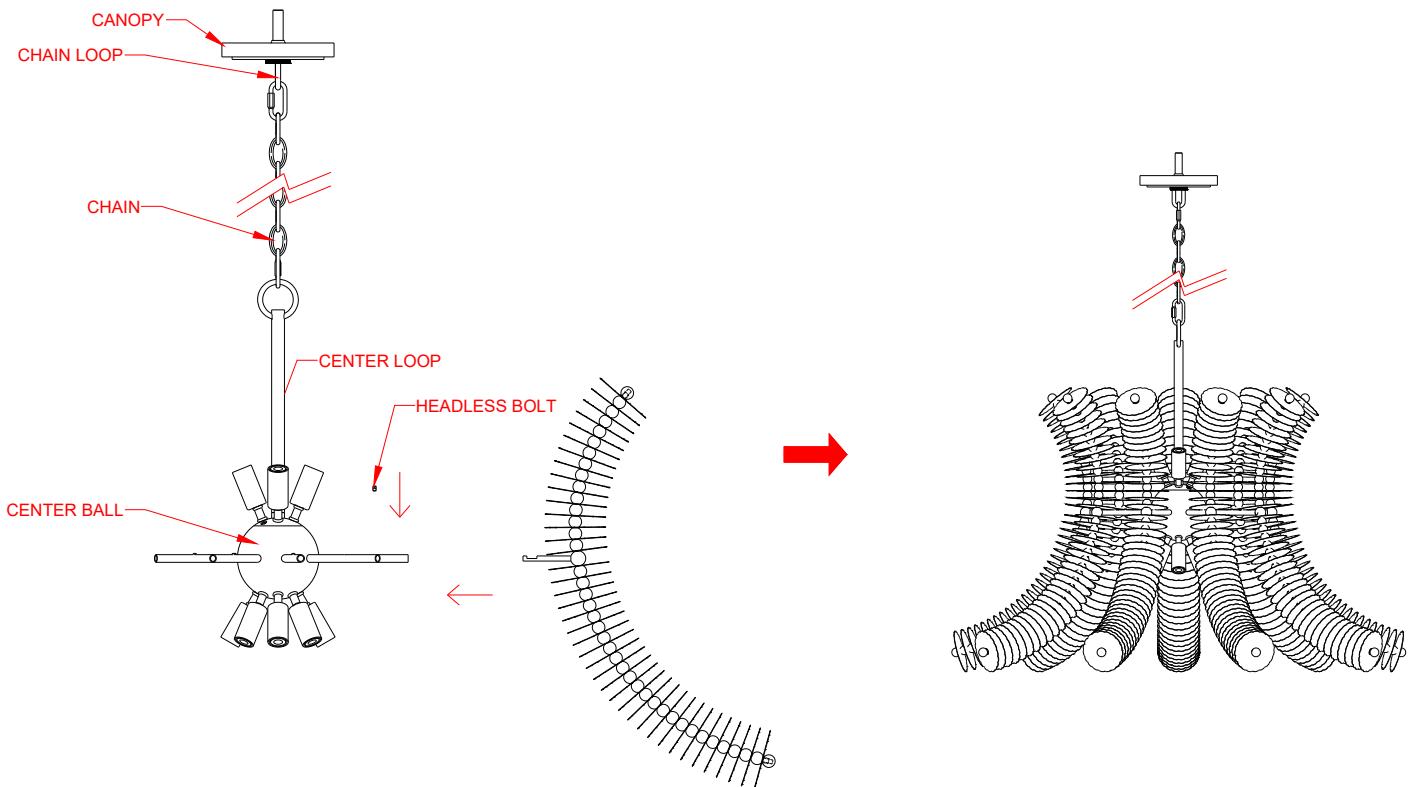


ASSEMBLY & INSTALLATION INSTRUCTIONS

MODEL: 523670OL
32 INCH DIAMETER PENDANT

COMPONENTS ASSEMBLY

STEP 9: Insert bulbs. Do not put bulb that exceeds 40watts.

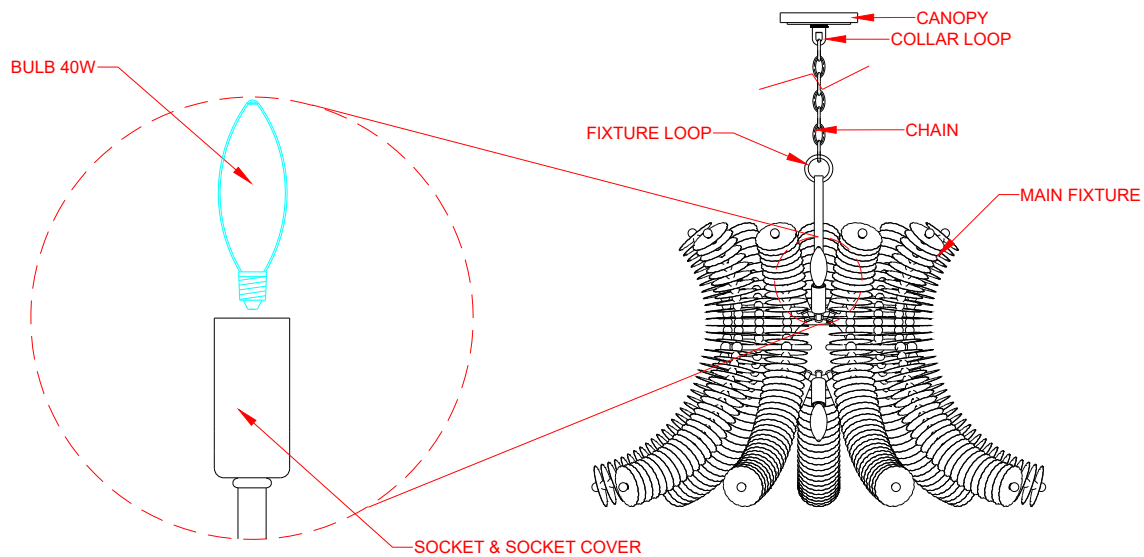

FOR LIGHTING MAINTENANCE:

- Regular cleaning of fixture with proper and gentle care using a soft duster, soft lint-free or damp cloth is recommended.
- Refrain from using harsh cleaning liquids that may cause chemical reaction on the hand painted finishes.
- Always refer to the Assembly Instruction before removing any components.
- **HANDLE WITH CARE.**



ASSEMBLY & INSTALLATION INSTRUCTIONS

MODEL: 5236700L
32 INCH DIAMETER PENDANT

PARTS LIST

IMAGE	PARTS NAME	QTY
	Mounting plate	1 PC
	Threaded nipple	1 PC
	Star washer	1 PC
	Hex nut	2 PCS
	Chain (8ft.)	1 PC
	Canopy	1 PC
	Capiz arm	9 PCS
	Cotton gloves	1 PAIR