


ASSEMBLY AND INSTALLATION INSTRUCTIONS

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER PRIOR TO INSTALLING OR SERVICING THIS FIXTURE.

NOTE: Before installing, consult local electrical codes for wiring and grounding requirements.

Installation Steps

1. Carefully unpack your new fixture and lay out all the parts on a clean surface. Take care not to lose any small parts necessary for installation.
2. Thread the suspended rod onto the nipple (A). Choose the suitable suspended rods that you need. Insert the fixture wire through the suspended rods and connect them together. Then thread the swivel into the suspended rod tightly.
3. Feed the wires through the threaded nut, canopy plate, and canopy, allowing them to slide down over the suspended rod. Take care not to cause any scratches.
4. Thread the crossbar onto the swivel. The wires can be fed through the notched coupling below the crossbar. Cut the black and white wires to desired length.
5. Secure the crossbar to the junction box by threading the two junction box screws through the slotted holes.
6. Make wire connections.
 - Attach ground wire to building ground wire using a wire nut.
 - Attach white wire (neutral) from light to white wire from building with a wire nut.
 - Attach black wire (hot) from light to black wire from building with a wire nut.Tuck the wire connections neatly into the junction box.
7. Slide canopy and canopy plate over threaded pipe. Secure using threaded nut.
8. Install the glass onto the glass holder.
9. Turn on the power at fuse or circuit box.

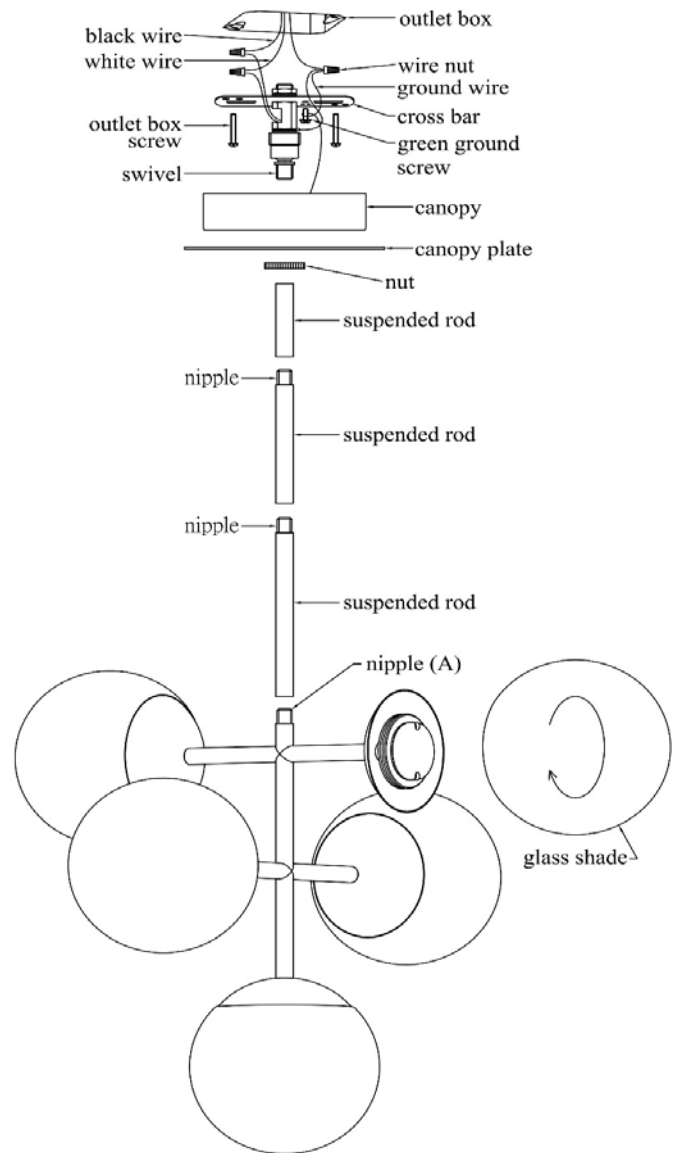

OXYGEN LIGHTING ©

oxygen

NEBULA Chandelier
120v: 3-680-xx 3-681-xx

**ASSEMBLY
INSTRUCTIONS**