


ASSEMBLY AND INSTALLATION INSTRUCTIONS

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER PRIOR TO INSTALLING OR SERVICING THIS FIXTURE.

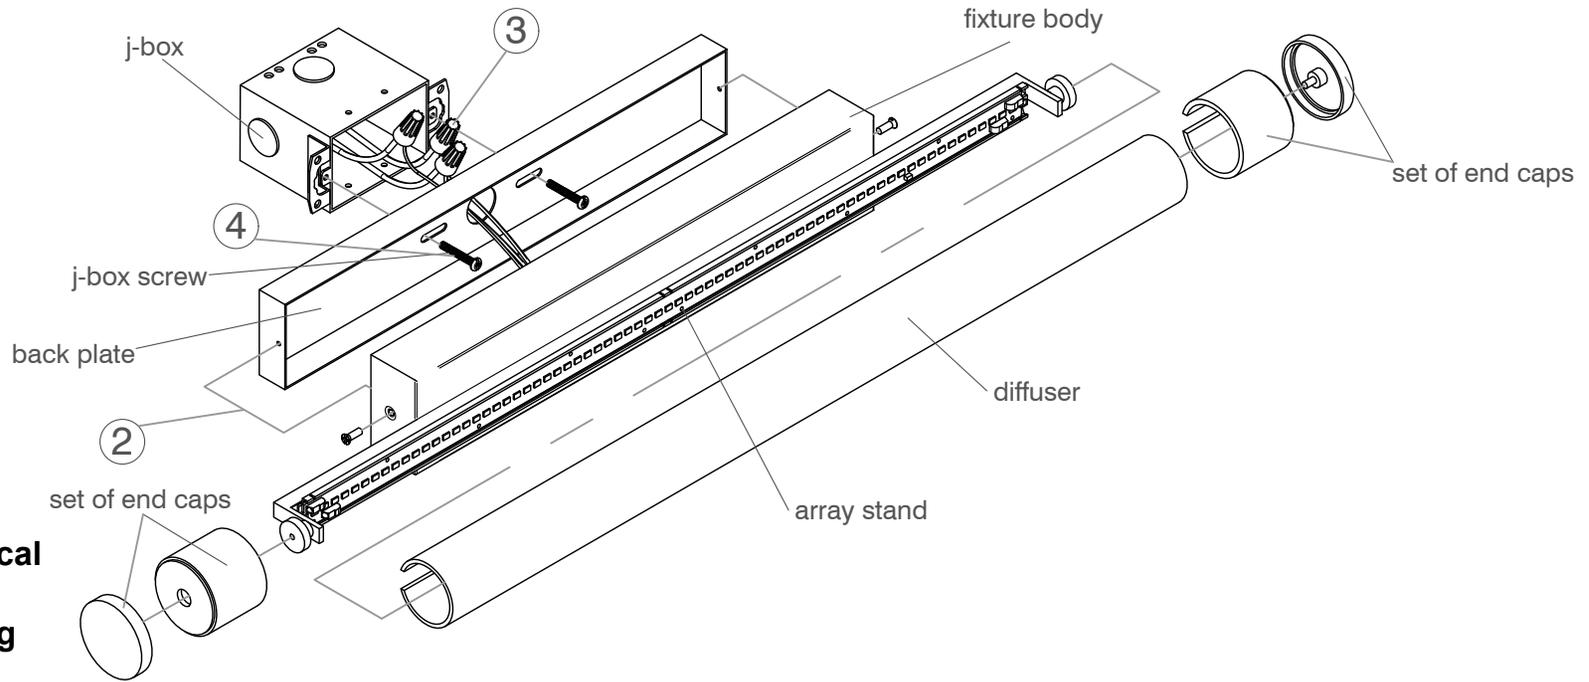

NOTE: Before installing, consult local electrical codes for wiring and grounding requirements.

Installation Steps

1. Carefully unpack your new fixture and lay out all the parts on clean surface. Take care not to lose any small parts necessary for installation.
2. Remove back plate from fixture.
3. Make wire connections. Attach ground wire to building ground wire using a wire nut or attach them to the mounting plate with a green ground screw. Connect orange connectors.
 - **FOR DIMMING:** If using a dimmer (not included), follow wiring instructions enclosed with dimmer. Double check wiring. Tuck the wire connections neatly into the junction box.
 - **FOR NON-DIMMING:** If not using a dimming switch, with wire nuts, cap off purple and gray wires individually. Wire positive wire with positive wire, negative wire with negative wire. Double check wiring. Tuck the wire connections neatly into the junction box.
4. Secure the back plate to the wall over the j-box by installing with j-box screws. back plate should be secure against wall.
5. Place the fixture body over the back plate and secure with provided screws. Install one set of end caps as shown in illustration. Slide diffuser over array stand on the fixture body. Install remaining set of end caps.
6. Diffuser and fixture should be secure and snug against wall.
7. Turn power back on at fuse or circuit box.

oxygen

ZENITH vanity

120v **3-557-xx, 3-558-xx, 3-559-xx**

277v **37-557-xx, 37-558-xx, 37-559-xx**

oxygen

OXYGEN LIGHTING
201 RAILHEAD RD, FORT WORTH, TX 76106
TEL. (877) 607-0202 FAX (877) 607-0203
WWW.OXYGENLIGHTING.COM

ASSEMBLY INSTRUCTIONS