
SOLAR PORT (SOLAR-PORT)

CATEGORY:
ACCESSORIES

MODEL RANGE:
GP-SOLAR-PORT-10IN
GP-SOLAR-PORT-6FT
GP-SOLAR-PORT-10FT



IDEAL FOR:

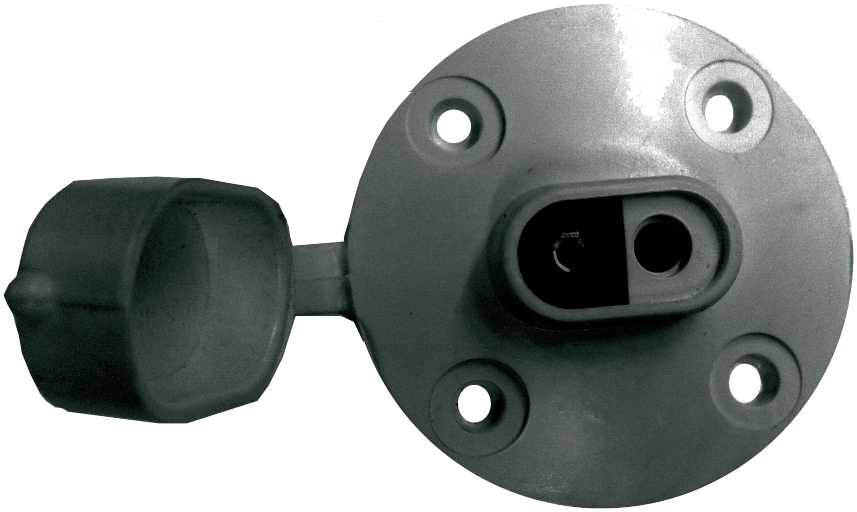

1 YEAR WARRANTY



TRUE PLUG-N-PLAY CONVENIENCE

The Go Power! Solar Port is a 2-wire SAE sidewall port that gives your RV a permanent plug for a portable solar kit. Mount it on the outside of the coach, route its 12 AWG cable to your battery compartment, and your portable kit plugs straight in whenever you set it out — no running cables through doors, windows or storage hatches.

BUILT FOR THE OUTSIDE OF YOUR RV

The SAE socket sits in a round flange that fastens to the sidewall with four screws, and a tethered rubber cap closes it when no panel is connected. The 12 AWG cable is cUL listed and features a 20A continuous current rating.

KEY FEATURES

- **PLUG'N'PLAY INSTALL**
- **PROTECTS CABLE CONNECTION**
- **ELIMINATES POSSIBILITY OF LEAKS**
- **CONNECTS WITH INDUSTRY STANDARD SOLAR CONNECTOR (SC) CABLES**
- **cUL LISTED CABLE**

2-wire SAE female connector — plug used on Go Power! SAE portable solar kits.
Tethered weather cap — keeps the socket covered when no panel is plugged in.
Sidewall mount — round flange, four mounting screws.
12 AWG cable rated for 105°C/221°F, 600V - UL Standard 1063 + CSA C22.2.
20A continuous current rating.


Go Power! | DOMETIC

P: +1 866 247 6527
E: sales@gopowersolar.com
W: gopowersolar.com


201 - 710 Redbrick St,
Victoria, British Columbia,
Canada, V8T 5J3

SPECIFICATIONS	
Connector	2-wire SAE, female, with tethered cap
Cable gauge	12 AWG (rated for 105°C/221°F, 600V, UL listed)
Mounting	Exterior sidewall, round flange, 4 screws
Certification + Protections	RoHS **Cable**: UL Standard 1063, CSA C22.2, UL 94 V-2 flammability rating
Materials	UV stabilized PVC overmold material
Amp Rating	20A continuous current rating

CABLE LENGTH	PART NUMBER
10 in	GP-SOLAR-PORT-10IN
6 ft	GP-SOLAR-PORT-6FT
10 ft	GP-SOLAR-PORT-10FT




Front

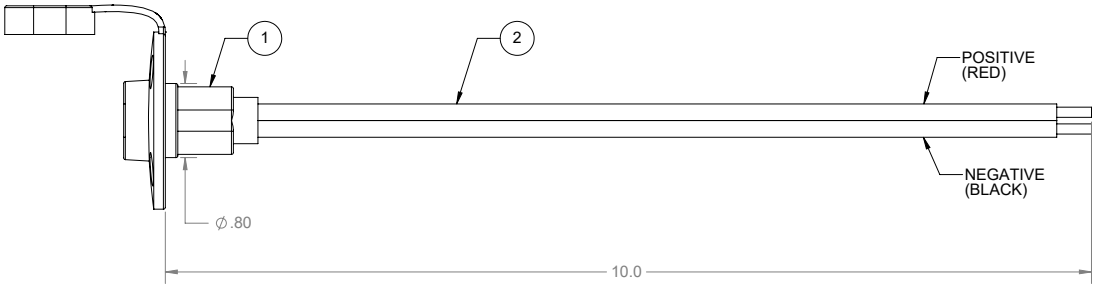

Side

SYSTEM CONTROL AT YOUR FINGERTIPS



Unlock the full potential of your RV's power system with the Go Power! Connect app!

Get real-time insights into your solar charging stats, battery levels, and power consumption on your mobile device. Monitor performance, and set inverter and charging parameters. Available on the iOS and Android app store.

Go Power! | DOMETIC

P: +1 866 247 6527
E: sales@gopowersolar.com
W: gopowersolar.com

201 - 710 Redbrick St,
Victoria, British Columbia,
Canada, V8T 5J3