

# OVERFLOW TRAP


EFFECTIVE DATE: 4/19/18

REPLACES: 1/27/14

## NOTES:

1. DIMENSIONS ARE  
SUBJECT TO CHANGE  
WITHOUT NOTICE. CONSULT  
FACTORY FOR CERTIFIED  
DIMENSIONS.

MATERIALS OF CONSTRUCTION : CAST IRON  
EXTERNAL SURFACES PAINTED WITH ONE COAT  
OF HEAT RESISTANT BLACK PAINT.

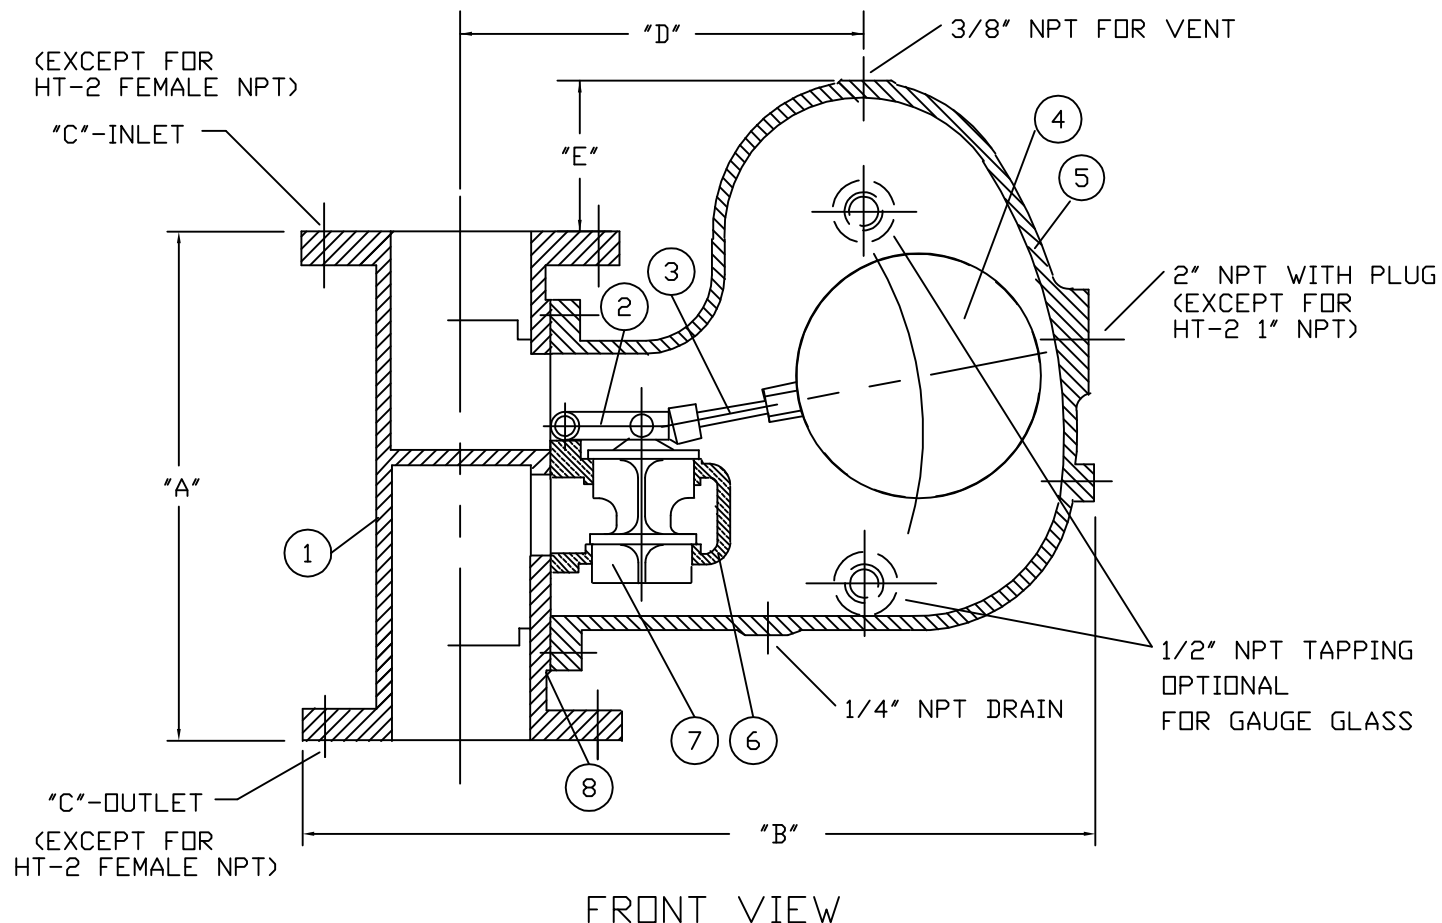

| ITEM | MAT'L. | DESCRIPTION         |
|------|--------|---------------------|
| 8    | FR162  | 3/16" RUBBER GASKET |
| 7    | BRASS  | VALVE               |
| 6    | BRASS  | VALVE SEAT CASING   |
| 5    | C.I.   | TRAP HOOD           |
| 4    | 304 SS | 7" DIA. FLOAT       |
| 3    | C'STL. | PIPE                |
| 2    | BRASS  | FLOAT LEVER         |
| 1    | C.I.   | TRAP BODY           |

NOTE -- ITEMS 2, 6, AND 7 MAKE A COMPLETE VALVE ASSEMBLY.

| MODELS | DIMENSIONS |         |        |           |        |
|--------|------------|---------|--------|-----------|--------|
|        | A          | B       | C      | D         | E      |
| HT-2   | 6-3/4"     | 14-3/4" | 2" NPT | 7-7/16"   | 3-3/4" |
| HT-3   | 14-3/4"    | 21-1/2" | 3" FLG | 11-3/4"   | 4-1/8" |
| HT-4   | 14-7/8"    | 22-1/2" | 4" FLG | 11-3/4"   | 4-1/8" |
| HT-6   | 14-3/4"    | 31-3/4" | 6" FLG | 20-15/16" | 3"     |

FLANGED INLETS & OUTLETS HAVE BOLT  
PATTERNS TO MATCH 150# ANSE FLANGES

MAX PRESS/TEMP-50 PSIG/180°F