

AURORALIGHT

PROJECT:

SKU #:

TYPE:

300W Transformer


TR300SS

The 300W Transformer supplies low-voltage 12/13/14/15V power to landscape lighting, outdoor lighting, and submersible light fixtures in residential and commercial applications

- Wall or Stanchion mountable
- Equipped with circuit breakers and thermal switch
- Indoor/Outdoor with IP65 rating
- ETL certified for UL1838 and CSA C22.2#250.7


DIMENSIONS	L5-1/2" x W6-1/8" x H13-7/8"
INPUT VOLTAGE	120VAC, 50/60Hz
OUTPUT VOLTAGE	12, 13, 14, 15VAC
WATTAGE	300W
MATERIAL	304 Stainless Steel
INPUT LEADS	180cm Water resistant cable
OUTPUT LEADS	Terminal block with leads
OPTIONS	Not included, Timer, Wireless control, light sensor
THERMAL CLASS	130°, Class B
OPERATING TEMP	-20°C to 70°C
EFFICIENCY	90%
TRANSFORMER TYPE	Built-in encapsulated toroidal core
INSTALLATION	Pre-punched knockouts for cable connectors

*For complete warranty terms, please visit: www.auroralight.com/warranty/

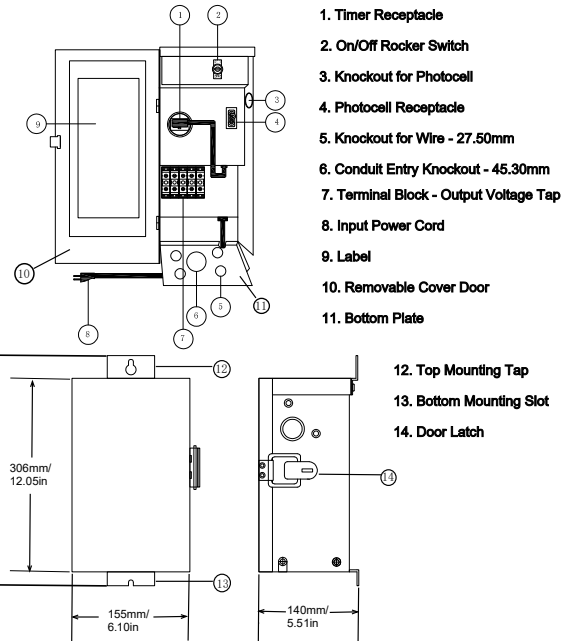

Specifications	
Wattage	300W
Input Voltage & Frequency	120VAC 50/60Hz
Input Current	3.1A
Multi Tap	12-13-14-15VAC
Output Voltage at Full Load	12.8/13.8/14.8/15.8VAC
Primary Leads	180cm PVC Water-resistant Cable with 3-prong US Plug
Output Leads	Terminal Block
Thermal Class	B130°C
Efficiency	90%
Dimensions	352x155x140mm
Weight	6.1KG

Wiring Diagram

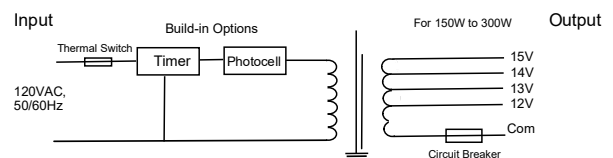

P. 760.931.2910

O. 2742 Loker Ave. W Carlsbad CA 92010

W. www.auroralight.com

MADE IN USA
WITH DOMESTIC & IMPORTED MATERIALS

