



**Filename:** 401432BN-LED - Cameo

**Manufacturer:** KUZCO LIGHTING

**Luminaire:** PENDANT

**Luminaire Cat:** Cameo - 401432BN - LED

**Lamp:** AC LED MODULE

**Lamp Cat:** AC LED

**Ballast Desc:** 120VAC ; 50/60Hz

**Ballast Cat:** PERNIA - KED75 - 120 - A3 - A

**Lamp Output:** Total luminaire Lumens: 349.5

**Max Candela:** 84.9 at Horizontal: 150°, Vertical: 11°

**Input Wattage:** 10

**Luminous Opening:** Rectangle (L: 4.57", W: 10")

**Test:** 3791--25

**Test Date:** 29 October 2025

**Test Lab:** EVERFINE

**Photometry :** Type C


**CIE Class:** Semi-Direct

**Cutoff Class:** Semicutoff

**Nema Type:** 7 X 7


#### Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	68.7	19.7%
0-40	115.7	33.1%
0-60	219.1	62.7%
60-90	88.0	25.2%
70-100	45.8	13.1%
90-120	11.3	3.2%
0-90	307.1	87.9%
90-180	42.4	12.1%
0-180	349.5	100%

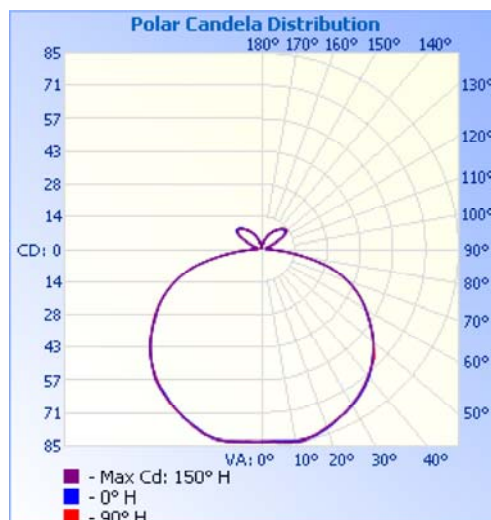

#### Lumens Per Zone

Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	8.0	2.3%	90-100	3.2	0.9%
10-20	23.7	6.8%	100-110	2.1	0.6%
20-30	37.0	10.6%	110-120	6.1	1.7%
30-40	47.0	13.4%	120-130	11.1	3.2%
40-50	52.1	14.9%	130-140	9.6	2.7%
50-60	51.3	14.7%	140-150	6.2	1.8%
60-70	45.3	13.0%	150-160	3.1	0.9%
70-80	31.5	9.0%	160-170	1.0	0.3%
80-90	11.2	3.2%	170-180	0.1	0%

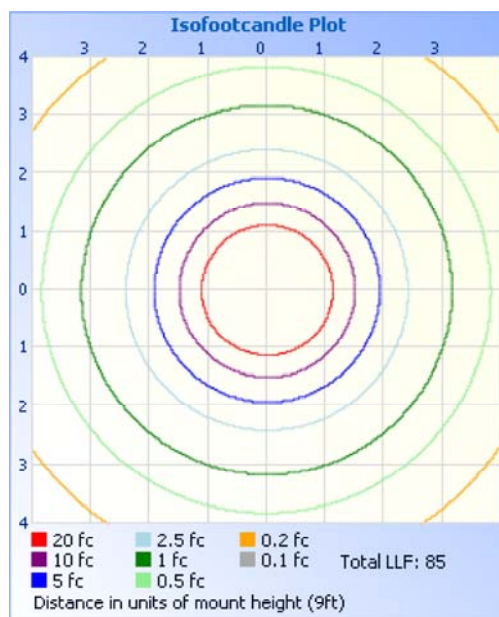

	Center Beam fc	Beam Width
1.5R	37.0 fc	7.2 ft 7.1 ft
3.0R	9.24 fc	14.5 ft 14.2 ft
4.5R	4.11 fc	21.7 ft 21.3 ft
6.0R	2.31 fc	28.9 ft 28.4 ft
7.5R	1.48 fc	36.2 ft 35.6 ft
9.0R	1.03 fc	43.4 ft 42.7 ft

■ Vert. Spread: 134.9°  
 ■ Horiz. Spread: 134.3°