



**Filename:** AT6506-WH-UNV - Slate

**Manufacturer:** KUZCO LIGHTING

**Luminaire:** ALL TERIOR

**Luminaire Cat:** Slate - AT6506 - WH - UNV

**Lamp:** DC LED with DC Driver

**Lamp Cat:** DC LED with DC Driver

**Ballast Desc:** Vin = 120 - 277VAC , Iin = 0.17AMP ; Vout = 12 - 40VDC , Iout = 350mA

**Ballast Cat:** Novbo - NE016277035 - 2GH

**Lamp Output:** Total luminaire Lumens: 1176.8

**Max Candela:** 236.5 at Horizontal: 0°, Vertical: 0°

**Input Wattage:** 14.2

**Luminous Opening:** Circular (Dia: 4.92")

**Test:** 3373-25

**Test Date:** 09 May 2025


**Test Lab:** EVERFINE

**Photometry :** Type C

**CIE Class:** General Diffuse

**Cutoff Class:** Noncutoff

**Nema Type:** 7 X 7

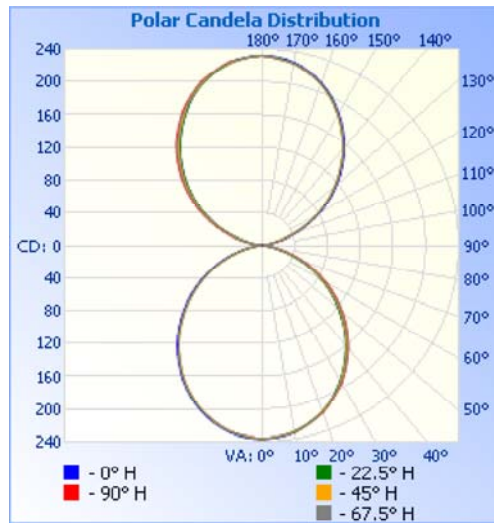

#### Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	179.4	15.2%
0-40	289.6	24.6%
0-60	493.6	41.9%
60-90	101.7	8.6%
70-100	42.9	3.6%
90-120	98.9	8.4%
0-90	595.2	50.6%
90-180	581.6	49.4%
0-180	1,176.8	100%

#### Lumens Per Zone

Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	22.2	1.9%	90-100	6.2	0.5%
10-20	63.1	5.4%	100-110	29.3	2.5%
20-30	94.0	8.0%	110-120	63.4	5.4%
30-40	110.3	9.4%	120-130	91.8	7.8%
40-50	110.0	9.3%	130-140	107.5	9.1%
50-60	93.9	8.0%	140-150	107.8	9.2%
60-70	64.9	5.5%	150-160	92.0	7.8%
70-80	30.3	2.6%	160-170	61.9	5.3%
80-90	6.5	0.6%	170-180	21.8	1.9%

