

KUZCO LIGHTING

LUMINAIRE PHOTOMETRIC REPORT

Filename: AT6606-BK - Mica

Manufacturer: KUZCO LIGHTING

Luminaire: WALL MOUNT / ALL-TERRIOR

Luminaire Cat: AT6606-BK

Lamp: AC LED

Lamp Cat: N/A

Ballast Desc: N/A

Ballast Cat: N/A

Lamp Output: Total luminaire Lumens: 770.7

Max Candela: 152.7 at Horizontal: 0°, Vertical: 5°

Input Wattage: 16.1

Luminous Opening: Rectangle w/Luminous Sides (L: 5.98", W: 0.98", H: 5.51")

Test: 1750-22

Test Date: 14 January 2022

Test Lab: KUZCO LIGHTING

Photometry : Type C


CIE Class: General Diffuse

Cutoff Class: Noncutoff

Nema Type: 7 X 7


Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	115.5	15%
0-40	187.2	24.3%
0-60	321.4	41.7%
60-90	68.4	8.9%
70-100	29.6	3.8%
90-120	66.1	8.6%
0-90	389.8	50.6%
90-180	380.9	49.4%
0-180	770.7	100%

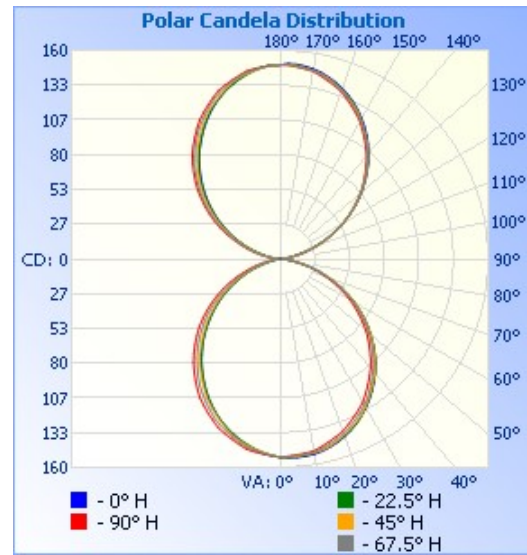

Lumens Per Zone

Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	14.3	1.9%	90-100	4.4	0.6%
10-20	40.6	5.3%	100-110	19.7	2.6%
20-30	60.6	7.9%	110-120	42.0	5.5%
30-40	71.6	9.3%	120-130	60.5	7.9%
40-50	72.1	9.4%	130-140	70.5	9.1%
50-60	62.1	8.1%	140-150	70.2	9.1%
60-70	43.2	5.6%	150-160	59.6	7.7%
70-80	20.4	2.6%	160-170	39.9	5.2%
80-90	4.8	0.6%	170-180	14.1	1.8%

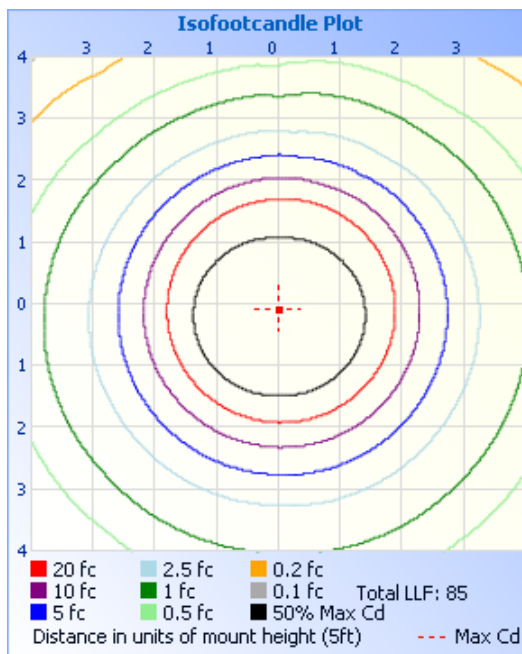

	Center Beam fc	Beam Width
2.5ft	24.3 fc	6.3 ft 6.6 ft
5.0ft	6.08 fc	12.6 ft 13.3 ft
7.5ft	2.70 fc	19.0 ft 19.9 ft
10.0ft	1.52 fc	25.3 ft 26.6 ft
12.5ft	0.97 fc	31.6 ft 33.2 ft
15.0ft	0.68 fc	37.9 ft 39.9 ft

■ Vert. Spread: 103.3°
 ■ Horiz. Spread: 106.1°