



**Filename:** EW33806-BK-UNV-010 - Ellis

**Manufacturer:** KUZCO LIGHTING

**Luminaire:** EXTERIOR WALL SCONCE

**Luminaire Cat:** Ellis - EW33806 - BK - UNV - 010

**Lamp:** DC LED with DC Driver

**Lamp Cat:** DC LED with DC Driver

**Ballast Desc:** Vin = 120 - 277VAC , Iin = 0.15AMP ; Vout = 42V max , Iout = 300mA

**Ballast Cat:** EPT - PVD13 - C030V42 - UNV7 - HE - P

**Lamp Output:** Total luminaire Lumens: 973.3

**Max Candela:** 255.7 at Horizontal: 0°, Vertical: 175°

**Input Wattage:** 12.4

**Luminous Opening:** Point

**Test:** 2914-24


**Test Date:** 20 December 2024

**Test Lab:** EVERFINE

**Photometry :** Type C

**CIE Class:** General Diffuse

**Cutoff Class:** Noncutoff

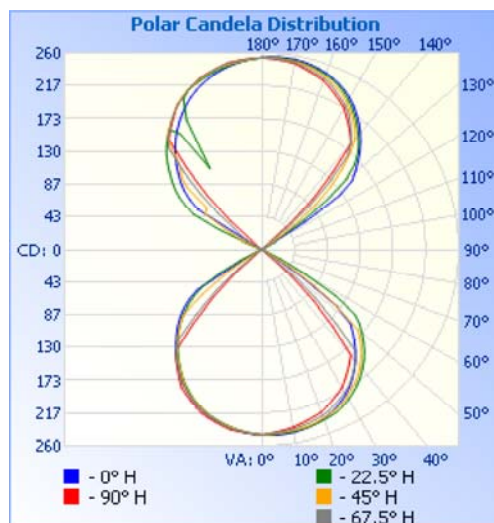

#### Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	192.1	19.7%
0-40	315.2	32.4%
0-60	470.6	48.4%
60-90	7.3	0.7%
70-100	3.4	0.3%
90-120	12.9	1.3%
0-90	477.9	49.1%
90-180	495.4	50.9%
0-180	973.3	100%

#### Lumens Per Zone

Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	23.2	2.4%	90-100	1.1	0.1%
10-20	66.7	6.9%	100-110	1.3	0.1%
20-30	102.1	10.5%	110-120	10.5	1.1%
30-40	123.1	12.6%	120-130	48.6	5%
40-50	109.2	11.2%	130-140	109.4	11.2%
50-60	46.3	4.8%	140-150	125.6	12.9%
60-70	5.0	0.5%	150-160	105.6	10.8%
70-80	1.2	0.1%	160-170	69.3	7.1%
80-90	1.1	0.1%	170-180	24.0	2.5%

