



**Filename:** LD3-EW09W14-3036-BK-UNV-010 - Lorna

**Manufacturer:** KUZCO LIGHTING

**Luminaire:** WALL SCONCE

**Luminaire Cat:** Lorna - LD3 - EW09W14 - 3036 - BK - UNV - 010

**Lamp:** DC LED Module

**Lamp Cat:** DC LED Module

**Ballast Desc:** DC LED Module

**Ballast Cat:** DC LED Module

**Lamp Output:** Total luminaire Lumens: 1218.4

**Max Candela:** 2,839.7 at Horizontal: 0°, Vertical: 5°

**Input Wattage:** 14.5

**Luminous Opening:** Rectangle (L: 4.57", W: 10")

**Test:** 3760--25

**Test Date:** 17 October 2025

**Test Lab:** EVERFINE

**Photometry :** Type C

**CIE Class:** Direct

**Cutoff Class:** Cutoff



**Nema Type:** 4 X 4

#### Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	1,129.0	92.7%
0-40	1,187.1	97.4%
0-60	1,200.9	98.6%
60-90	5.6	0.5%
70-100	5.7	0.5%
90-120	3.1	0.3%
0-90	1,206.5	99%
90-180	11.9	1%
0-180	1,218.4	100%

#### Lumens Per Zone

Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	258.3	21.2%	90-100	1.6	0.1%
10-20	563.3	46.2%	100-110	0.9	0.1%
20-30	307.3	25.2%	110-120	0.6	0.1%
30-40	58.1	4.8%	120-130	0.8	0.1%
40-50	11.4	0.9%	130-140	1.3	0.1%
50-60	2.4	0.2%	140-150	1.9	0.2%
60-70	1.5	0.1%	150-160	2.3	0.2%
70-80	1.9	0.2%	160-170	1.9	0.2%
80-90	2.2	0.2%	170-180	0.7	0.1%

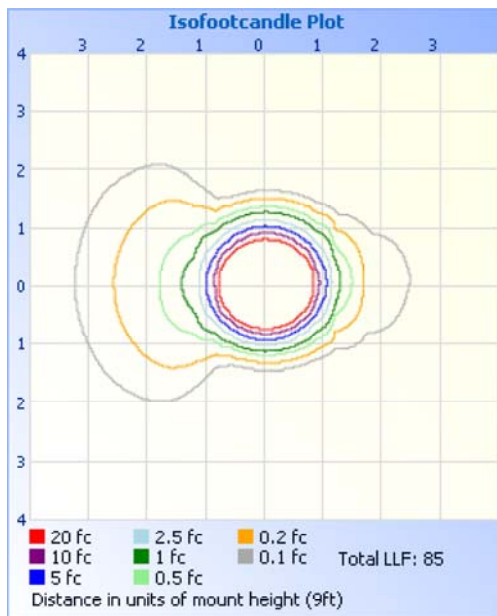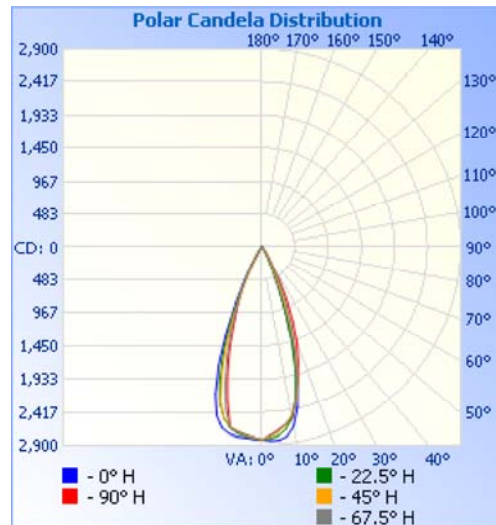

	Center Beam fc	Beam Width
1.5R	1,254 fc	1.1 ft 1.0 ft
3.0R	313 fc	2.2 ft 2.0 ft
4.5R	139 fc	3.3 ft 2.9 ft
6.0R	78.4 fc	4.4 ft 3.9 ft
7.5R	50.2 fc	5.5 ft 4.9 ft
9.0R	34.8 fc	6.6 ft 5.9 ft

■ Vert. Spread: 40.0°  
 ■ Horiz. Spread: 36.3°