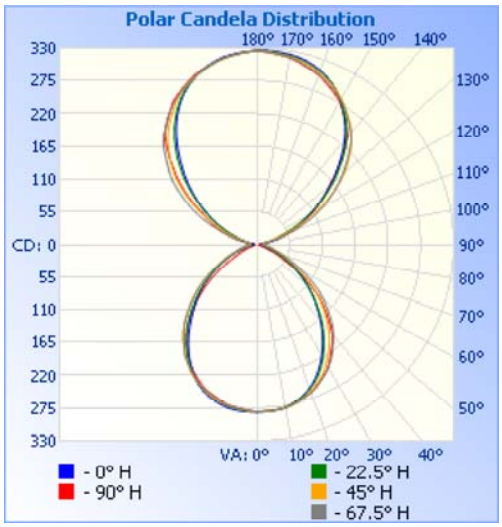



Filename: **LP23241-PW - Void**
Manufacturer: KUZCO LIGHTING
Luminaire: LINEAR PENDANT/CEILING MOUNT
Luminaire Cat: VOID_LP23241-PW
Lamp: DC LED
Lamp Cat: NA
Ballast Desc: Vin = 120-277VAC, Iin:0.55A; Vout =21-40-DC, Iout=1000mA
Ballast Cat: NE046277100-2GH
Lamp Output: Total luminaire Lumens: 1481.5
Max Candela: 326.7 at Horizontal: 0°, Vertical: 177.5°
Input Wattage: 37.5
Luminous Opening: Rectangle (L: 40.94", W: 5.12")
Test: 4430-26
Test Date: 27 October 2026
Test Lab: EVERFINE
Photometry : Type C
CIE Class: General Diffuse
Cutoff Class: Noncutoff


Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	216.2	14.6%
0-40	346.1	23.4%
0-60	557.0	37.6%
60-90	92.1	6.2%
70-100	52.4	3.5%
90-120	131.4	8.9%
0-90	649.1	43.8%
90-180	832.4	56.2%
0-180	1,481.5	100%

Lumens Per Zone

Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	26.6	1.8%	90-100	12.4	0.8%
10-20	76.2	5.1%	100-110	36.2	2.4%
20-30	113.3	7.7%	110-120	82.9	5.6%
30-40	129.9	8.8%	120-130	128.6	8.7%
40-50	121.1	8.2%	130-140	158.6	10.7%
50-60	89.8	6.1%	140-150	160.5	10.8%
60-70	52.1	3.5%	150-160	134.2	9.1%
70-80	26.2	1.8%	160-170	88.3	6%
80-90	13.8	0.9%	170-180	30.7	2.1%

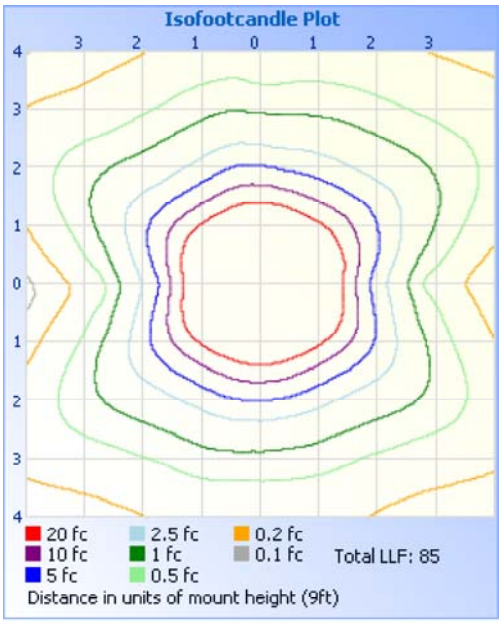

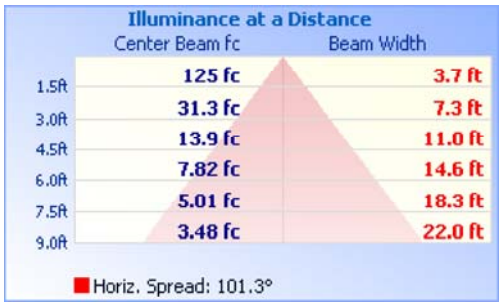

Photometrics Pro 1.3.29 copyright 2003-2026 by jSolutions, Inc.
Reported data calculated from manufacturer's data file, based on IES recommended methods.