

KUZCO LIGHTING

LUMINAIRE PHOTOMETRIC REPORT

Filename: LP23532-BG - Blade

Manufacturer: KUZCO LIGHTING

Luminaire: CEILING MOUNT/ LINEAR PENDANT

Luminaire Cat: LP23532-BG

Lamp: DC LED

Lamp Cat: N/A

Ballast Desc: INPUT: 120VAC 0.16A 50/60Hz. OUTPUT: 18-40VDC 350mA

Ballast Cat: NE012120035-2G

Lamp Output: Total luminaire Lumens: 1087.2

Max Candela: 167.4 at Horizontal: 180°, Vertical: 135°

Input Wattage: 13.3

Luminous Opening: Rectangle (L: 32.01", W: 0.98")

Test: 2165-23

Test Date: 15 May 2023

Test Lab: KUZCO LIGHTING

Photometry : Type C


CIE Class: General Diffuse

Cutoff Class: Noncutoff

Nema Type: 7 X 7

Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	92.6	8.5%
0-40	164.7	15.2%
0-60	349.5	32.2%
60-90	232.8	21.4%
70-100	205.3	18.9%
90-120	227.0	20.9%
0-90	582.3	53.6%
90-180	504.8	46.4%
0-180	1,087.2	100%

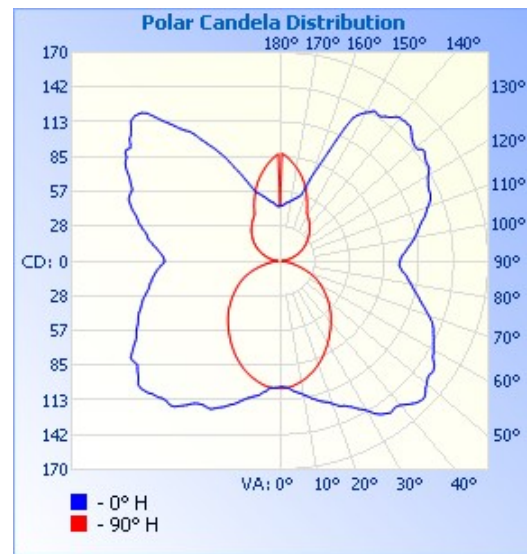

Lumens Per Zone

Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	9.9	0.9%	90-100	63.6	5.8%
10-20	30.7	2.8%	100-110	77.8	7.2%
20-30	51.9	4.8%	110-120	85.6	7.9%
30-40	72.2	6.6%	120-130	83.9	7.7%
40-50	88.9	8.2%	130-140	73.5	6.8%
50-60	95.9	8.8%	140-150	55.2	5.1%
60-70	91.1	8.4%	150-160	36.9	3.4%
70-80	78.2	7.2%	160-170	21.3	2%
80-90	63.5	5.8%	170-180	7.1	0.6%

