



**Filename:** LP79140-BK - Ovale

**Manufacturer:** KUZCO LIGHTING

**Luminaire:** PENDANT

**Luminaire Cat:** Ovale - LP79140 - BK

**Lamp:** DC LED with DC Driver

**Lamp Cat:** DC LED with DC Driver

**Ballast Desc:** Vin = 120 - 277VAC , Iin = 0.32AMP ; Vout = 18 - 40VDC , Iout = 700mA

**Ballast Cat:** Novbo - NE032277070 - 2GH

**Lamp Output:** Total luminaire Lumens: 619.3

**Max Candela:** 219.4 at Horizontal: 90°, Vertical: 1°

**Input Wattage:** 28

**Luminous Opening:** Circular (Dia: 4.92")

**Test:** 3377-25

**Test Date:** 09 May 2025


**Test Lab:** EVERFINE

**Photometry :** Type C

**CIE Class:** Direct

**Cutoff Class:** Cutoff

**Nema Type:** 7 X 7

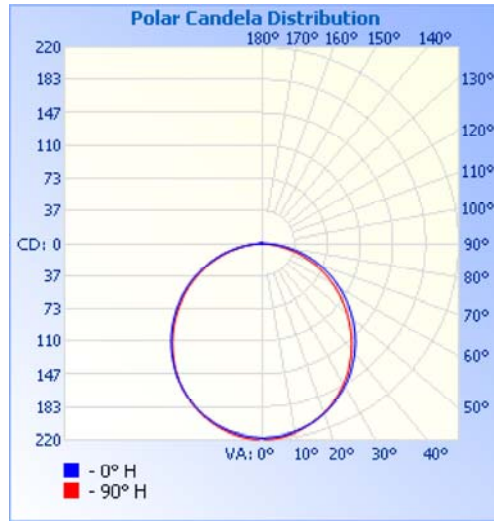

#### Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	168.0	27.1%
0-40	274.4	44.3%
0-60	482.8	78%
60-90	131.8	21.3%
70-100	56.2	9.1%
90-120	1.5	0.2%
0-90	614.6	99.2%
90-180	4.8	0.8%
0-180	619.3	100%

#### Lumens Per Zone

Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	20.6	3.3%	90-100	0.4	0.1%
10-20	58.7	9.5%	100-110	0.5	0.1%
20-30	88.7	14.3%	110-120	0.6	0.1%
30-40	106.4	17.2%	120-130	0.7	0.1%
40-50	109.6	17.7%	130-140	0.7	0.1%
50-60	98.8	15.9%	140-150	0.7	0.1%
60-70	75.9	12.3%	150-160	0.6	0.1%
70-80	44.7	7.2%	160-170	0.4	0.1%
80-90	11.2	1.8%	170-180	0.1	0%

