



Filename: MP14850-WH - Chute

Manufacturer: Kuzco Lighting

Luminaire: CHUTE / WALL MOUNT

Luminaire Cat: MP14850-WH

Lamp: DC LED/ w DRIVER

Lamp Cat: UNKNOWN

Ballast Desc: [IN: 120VAC, 50/60Hz; OUT: 30-42VDC, 1800mA (const)] | [IN: 120VAC, 50/60Hz; OUT: 30-42VDC, 1200mA (const)]

Ballast Cat: [3xDR-CC-80-42] | [1xDR-CC-60-42]

Lamp Output: Total luminaire Lumens: 12945.9

Max Candela: 1,590.5 at Horizontal: 80°, Vertical: 52.5°

Input Wattage: 260


Luminous Opening: Vertical Cylinder (Dia : 50.04", H: 13.2")

Test Lab: Kuzco Lighting

Photometry : Type C

CIE Class: Semi-Direct

Cutoff Class: Noncutoff

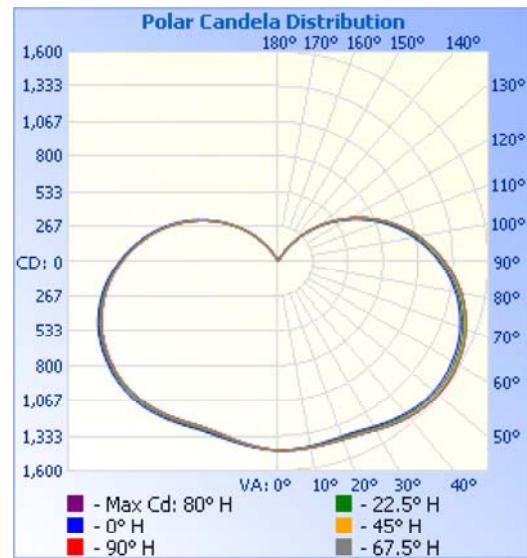


Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	1,200.1	9.3%
0-40	2,131.1	16.5%
0-60	4,693.3	36.3%
60-90	4,417.8	34.1%
70-100	4,171.2	32.2%
90-120	2,994.7	23.1%
0-90	9,111.2	70.4%
90-180	3,834.7	29.6%
0-180	12,945.9	100%

Lumens Per Zone

Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	136.6	1.1%	90-100	1,245.7	9.6%
10-20	401.9	3.1%	100-110	1,009.0	7.8%
20-30	661.6	5.1%	110-120	740.1	5.7%
30-40	931.0	7.2%	120-130	475.2	3.7%
40-50	1,182.9	9.1%	130-140	247.6	1.9%
50-60	1,379.4	10.7%	140-150	89.6	0.7%
60-70	1,492.3	11.5%	150-160	19.7	0.2%
70-80	1,506.1	11.6%	160-170	6.0	0%
80-90	1,419.4	11.0%	170-180	1.9	0%

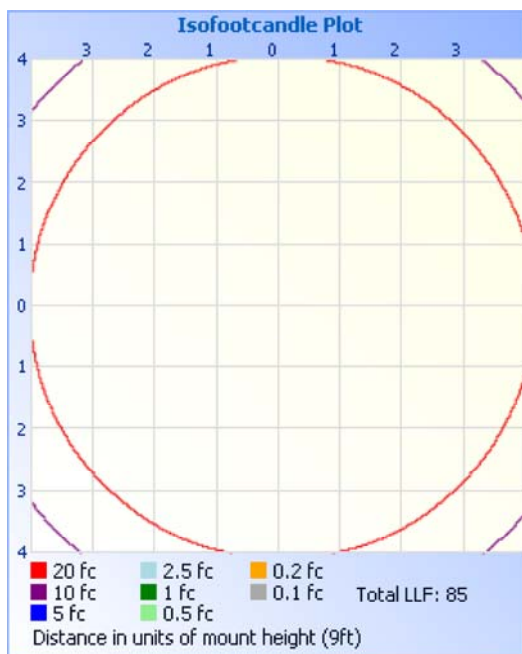

	Center Beam fc	Beam Width
1.5ft	639 fc	
3.0ft	160 fc	
4.5ft	71.0 fc	
6.0ft	40.0 fc	
7.5ft	25.6 fc	
9.0ft	17.8 fc	