



**Filename:** PD11132-AS - Twist

**Manufacturer:** KUZCO LIGHTING

**Luminaire:** PENDANT

**Luminaire Cat:** Twist - PD11132 - AS

**Lamp:** DC LED Module

**Lamp Cat:** DC LED Module

**Ballast Desc:** Vin = 100 - 135VAC , Iin = 0.6AMP max; Vout = 25 - 40VDC , Iout = 700mA

**Ballast Cat:** BQE - BQE30 - 0700 - 40 - TD

**Lamp Output:** Total luminaire Lumens: 2510.6

**Max Candela:** 313.5 at Horizontal: 30°, Vertical: 74°

**Input Wattage:** 56.1

**Luminous Opening:** Rectangle (L: 4.57", W: 10")

**Test:** 3784--25


**Test Date:** 24 October 2025

**Test Lab:** EVERFINE

**Photometry :** Type C

**CIE Class:** General Diffuse

**Cutoff Class:** Noncutoff

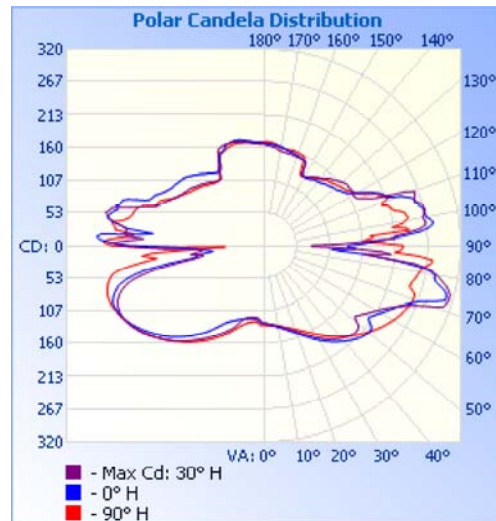

#### Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	124.6	5%
0-40	241.7	9.6%
0-60	613.9	24.5%
60-90	733.8	29.2%
70-100	733.5	29.2%
90-120	685.5	27.3%
0-90	1,347.6	53.7%
90-180	1,163.0	46.3%
0-180	2,510.6	100%

#### Lumens Per Zone

Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	12.2	0.5%	90-100	249.1	9.9%
10-20	38.9	1.5%	100-110	248.4	9.9%
20-30	73.6	2.9%	110-120	188.0	7.5%
30-40	117.1	4.7%	120-130	145.6	5.8%
40-50	164.6	6.6%	130-140	114.1	4.5%
50-60	207.6	8.3%	140-150	85.1	3.4%
60-70	249.3	9.9%	150-160	70.3	2.8%
70-80	276.3	11.0%	160-170	46.6	1.9%
80-90	208.2	8.3%	170-180	15.8	0.6%

