



Filename: PD19804-BN-UNV - Stylo

Manufacturer: KUZCO LIGHTING

Luminaire: PENDANT

Luminaire Cat: Stylo - PD19804 - BN - UNV

Lamp: DC LED Module with DC Driver

Lamp Cat: DC LED Module with DC Driver

Ballast Desc: Vin = 120 - 277VAC , Iin = 0.15AMP ; Vout = 12 - 42VDC , Iout = 160mA

Ballast Cat: Novbo - NE007277016 - 2GH

Lamp Output: Total luminaire Lumens: 565.6

Max Candela: 69.3 at Horizontal: 180°, Vertical: 5°

Input Wattage: 7.1

Luminous Opening: Rectangle (L: 4.57", W: 10")

Test: 3615--25


Test Date: 10 September 2025

Test Lab: EVERFINE

Photometry : Type C

CIE Class: Semi-Direct

Cutoff Class: Noncutoff

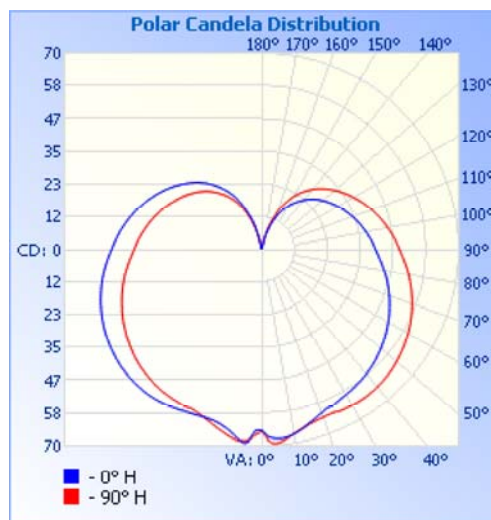


Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	53.4	9.4%
0-40	92.3	16.3%
0-60	192.3	34%
60-90	164.1	29%
70-100	157.7	27.9%
90-120	130.9	23.1%
0-90	356.4	63%
90-180	209.2	37%
0-180	565.6	100%

Lumens Per Zone

Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	6.4	1.1%	90-100	49.2	8.7%
10-20	18.1	3.2%	100-110	44.1	7.8%
20-30	28.8	5.1%	110-120	37.7	6.7%
30-40	39.0	6.9%	120-130	30.6	5.4%
40-50	47.2	8.3%	130-140	23.0	4.1%
50-60	52.8	9.3%	140-150	15.2	2.7%
60-70	55.5	9.8%	150-160	7.8	1.4%
70-80	55.5	9.8%	160-170	1.8	0.3%
80-90	53.0	9.4%	170-180	0.1	0%

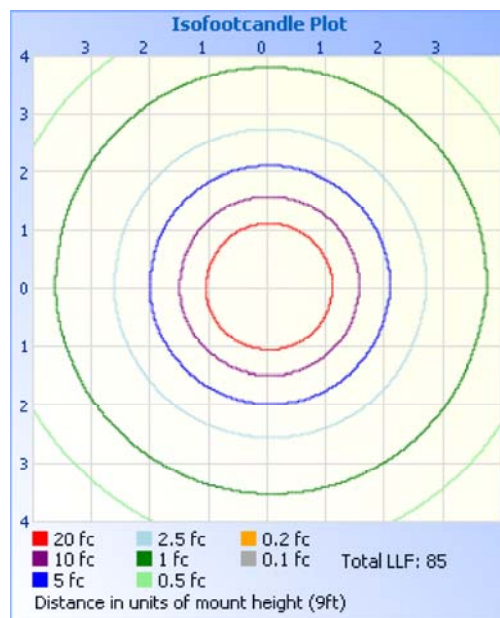

Illuminance at a Distance		
	Center Beam fc	Beam Width
1.5ft	28.7 fc	
3.0ft	7.17 fc	
4.5ft	3.19 fc	
6.0ft	1.79 fc	
7.5ft	1.15 fc	
9.0ft	0.80 fc	