

KUZCO LIGHTING | LED

Filename: PD302724CBGS-UNV-010 - Duo

Manufacturer: KUZCO LIGHTING

Luminaire: CEILING/FPENDANT

Luminaire Cat: PD302724CBGS

Lamp: DC LED w/ Driver

Lamp Cat: NA

Ballast Desc: IN 100-130VAC; OUT: 32-42VDC, 1280mA

Ballast Cat: HUEUC DR-CC-60-42

Lamp Output: Total luminaire Lumens: 1223.4

Max Candela: 165.0 at Horizontal: 90°, Vertical: 30°

Input Wattage: 47.2

Luminous Opening: Circular (Dia: 24.02")

Test: 1502-20


Test Date: 20 October 2020

Test Lab: KUZCO LIGHTING

Photometry : Type C

CIE Class: Semi-Direct

Cutoff Class: Noncutoff

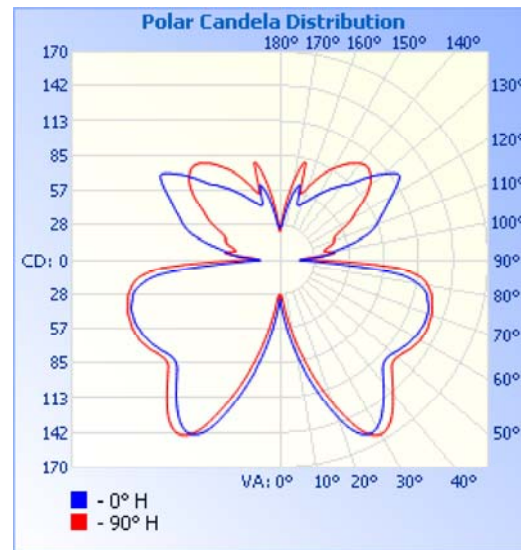

Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	103.2	8.4%
0-40	197.1	16.1%
0-60	412.0	33.7%
60-90	353.5	28.9%
70-100	256.3	20.9%
90-120	172.0	14.1%
0-90	765.5	62.6%
90-180	457.9	37.4%
0-180	1,223.4	100%

Lumens Per Zone

Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	5.1	0.4%	90-100	33.5	2.7%
10-20	28.7	2.3%	100-110	56.9	4.7%
20-30	69.3	5.7%	110-120	81.6	6.7%
30-40	93.9	7.7%	120-130	94.4	7.7%
40-50	99.9	8.2%	130-140	79.4	6.5%
50-60	115.1	9.4%	140-150	55.7	4.6%
60-70	130.7	10.7%	150-160	33.9	2.8%
70-80	134.5	11.0%	160-170	18.1	1.5%
80-90	88.3	7.2%	170-180	4.5	0.4%

