



**Filename:** PD30502-BG\_CL-UNV - Rise

**Manufacturer:** KUZCO LIGHTING

**Luminaire:** PENDANT

**Luminaire Cat:** Rise - PD30502 - BGCL - UNV

**Lamp:** DC LED Module

**Lamp Cat:** DC LED Module

**Ballast Desc:** Vin = 120 - 277VAC , Iin = 0.17AMP ; Vout = 12 - 40VDC , Iout = 300mA

**Ballast Cat:** Novbo - NE016277030 - 2GH

**Lamp Output:** Total luminaire Lumens: 882.9

**Max Candela:** 84.4 at Horizontal: 270°, Vertical: 88°

**Input Wattage:** 11.9

**Luminous Opening:** Rectangle (L: 4.57", W: 10")

**Test:** 3767--25


**Test Date:** 21 October 2025

**Test Lab:** EVERFINE

**Photometry :** Type C

**CIE Class:** General Diffuse

**Cutoff Class:** Noncutoff

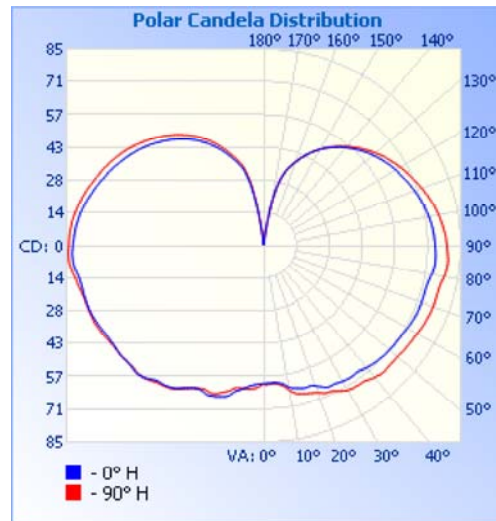

#### Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	56.1	6.4%
0-40	101.3	11.5%
0-60	226.7	25.7%
60-90	245.5	27.8%
70-100	255.1	28.9%
90-120	237.7	26.9%
0-90	472.2	53.5%
90-180	410.7	46.5%
0-180	882.9	100%

#### Lumens Per Zone

Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	5.8	0.7%	90-100	85.9	9.7%
10-20	18.6	2.1%	100-110	80.4	9.1%
20-30	31.6	3.6%	110-120	71.4	8.1%
30-40	45.2	5.1%	120-130	60.3	6.8%
40-50	57.8	6.5%	130-140	47.7	5.4%
50-60	67.6	7.7%	140-150	34.2	3.9%
60-70	76.3	8.6%	150-160	21.0	2.4%
70-80	82.3	9.3%	160-170	9.3	1.1%
80-90	86.9	9.8%	170-180	0.6	0.1%

