



**Filename:** PD321201PN - Marni

**Manufacturer:** KUZCO LIGHTING

**Luminaire:** PENDANT MOUNT

**Luminaire Cat:** Marni -PD321201PN

**Lamp:** DC LED with DC Driver

**Lamp Cat:** DC LED with DC Driver

**Ballast Desc:** Vin = 120 - 277VAC , Iin = 0.15AMP ; Vout = 12 - 42VDC ; Iout = 160mA

**Ballast Cat:** Novbo - NE007277016 - 2GH

**Lamp Output:** Total luminaire Lumens: 290.9

**Max Candela:** 81.7 at Horizontal: 70°, Vertical: 48°

**Input Wattage:** 6.4

**Luminous Opening:** Point

**Test:** 3168-25


**Test Date:** 12 March 2025

**Test Lab:** EVERFINE

**Photometry :** Type C

**CIE Class:** Semi-Direct

**Cutoff Class:** Semicutoff

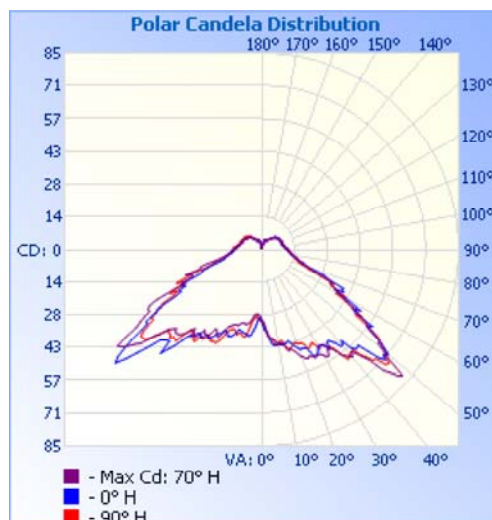

#### Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	36.4	12.5%
0-40	69.3	23.8%
0-60	169.6	58.3%
60-90	71.4	24.6%
70-100	47.5	16.3%
90-120	30.9	10.6%
0-90	241.1	82.9%
90-180	49.9	17.1%
0-180	290.9	100%

#### Lumens Per Zone

Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	3.5	1.2%	90-100	12.0	4.1%
10-20	11.8	4.0%	100-110	10.3	3.5%
20-30	21.1	7.3%	110-120	8.6	3%
30-40	32.9	11.3%	120-130	7.1	2.4%
40-50	46.9	16.1%	130-140	5.3	1.8%
50-60	53.5	18.4%	140-150	3.4	1.2%
60-70	36.0	12.4%	150-160	2.2	0.8%
70-80	20.8	7.1%	160-170	0.9	0.3%
80-90	14.7	5.0%	170-180	0.1	0%

