



**Filename:** PD37018-VBSM-3WCCT-UNV - Kyoto  
(@3000K)

**Manufacturer:** KUZCO LIGHTING

**Luminaire:** PENDANT

**Luminaire Cat:** Kyoto - PD37018 - VB/SM - 3WCCT - UNV

**Lamp:** DC LED with DC Driver

**Lamp Cat:** DC LED with DC Driver

**Ballast Desc:** Vin = 120 - 277VAC , Iin = 0.32AMP ; Vout = 18 - 40VDC , Iout = 500mA

**Ballast Cat:** Novbo - NE024277050 - 2GH

**Lamp Output:** Total luminaire Lumens: 819.1

**Max Candela:** 420.5 at Horizontal: 270°, Vertical: 1°

**Input Wattage:** 19.9

**Luminous Opening:** Point

**Test:** 3005-25

**Test Date:** 24 January 2025


**Test Lab:** EVERFINE

**Photometry :** Type C

**CIE Class:** Direct

**Cutoff Class:** Cutoff

**Nema Type:** 6 X 6

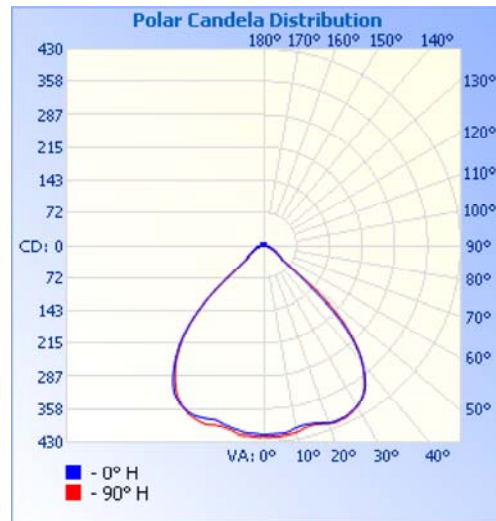

#### Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	340.4	41.6%
0-40	564.0	68.9%
0-60	758.9	92.7%
60-90	38.8	4.7%
70-100	18.0	2.2%
90-120	5.3	0.7%
0-90	797.7	97.4%
90-180	21.4	2.6%
0-180	819.1	100%

#### Lumens Per Zone

Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	39.3	4.8%	90-100	1.7	0.2%
10-20	114.7	14.0%	100-110	1.6	0.2%
20-30	186.3	22.7%	110-120	2.1	0.3%
30-40	223.6	27.3%	120-130	4.1	0.5%
40-50	157.6	19.2%	130-140	4.7	0.6%
50-60	37.3	4.6%	140-150	3.5	0.4%
60-70	22.4	2.7%	150-160	2.5	0.3%
70-80	12.8	1.6%	160-170	1.0	0.1%
80-90	3.6	0.4%	170-180	0.3	0%

