



Filename: PD418006MB-UNV - Issa

Luminaire: PENDANT WALL SCNCE/VANITY

Luminaire Cat: Issa - PD418006MB- UNV

Lamp: DC LED with DC Driver

Lamp Cat: DC LED with DC Driver

Ballast Desc: Vin = 120 - 277VAC , Iin = 0.15AMP ; Vout = 12 - 42VDC , Iout = 250mA

Ballast Cat: Novbo - NE009277025 - 2GH

Lamp Output: Total luminaire Lumens: 562.9

Max Candela: 204.6 at Horizontal: 0°, Vertical: 2.5°

Input Wattage: 11

Luminous Opening: Circular (Dia: 4.33")

Test: 2849-24

Test Date: 28 November 2024

Test Lab: KUZCO LIGHTING

Photometry : Type C


CIE Class: Direct

Cutoff Class: Cutoff

Nema Type: 7 X 7

Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	157.7	28%
0-40	257.1	45.7%
0-60	446.8	79.4%
60-90	111.0	19.7%
70-100	46.1	8.2%
90-120	1.9	0.3%
0-90	557.8	99.1%
90-180	5.1	0.9%
0-180	562.9	100%

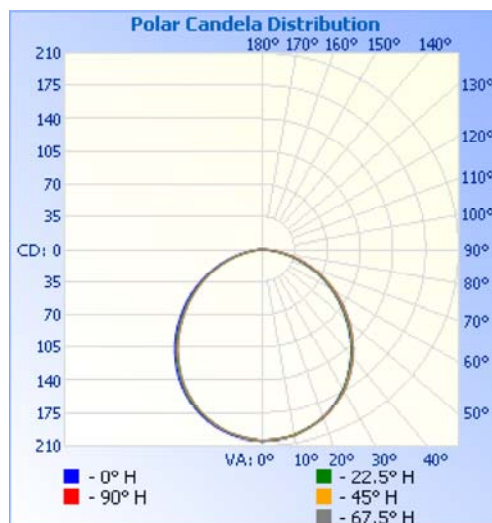

Lumens Per Zone

Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	19.3	3.4%	90-100	0.5	0.1%
10-20	55.2	9.8%	100-110	0.6	0.1%
20-30	83.3	14.8%	110-120	0.7	0.1%
30-40	99.3	17.6%	120-130	0.7	0.1%
40-50	101.1	18.0%	130-140	0.7	0.1%
50-60	88.7	15.8%	140-150	0.7	0.1%
60-70	65.4	11.6%	150-160	0.6	0.1%
70-80	36.2	6.4%	160-170	0.4	0.1%
80-90	9.4	1.7%	170-180	0.1	0%

