



Filename: PD7721-BN - Pendula

Manufacturer: KUZCO LIGHTING

Luminaire: PENDANT

Luminaire Cat: Pendula - PD7721 - BN

Lamp: AC LED Module

Lamp Cat: AC LED Module

Ballast Desc: 120VAC ; 50/60Hz

Ballast Cat: D38 - 400 - 930 - 120 - S1

Lamp Output: Total luminaire Lumens: 138.7

Max Candela: 90.6 at Horizontal: 170°, Vertical: 4°

Input Wattage: 4.7

Luminous Opening: Circular (Dia: 4.92")

Test: 3518-25

Test Date: 24 July 2025

Test Lab: EVERFINE

Photometry : Type C


CIE Class: Semi-Direct

Cutoff Class: Noncutoff

Nema Type: 7 X 7

Zonal Lumen Summary

| Zone | Lumens | % Luminaire |
|--------|--------|-------------|
| 0-30 | 31.3 | 22.6% |
| 0-40 | 50.1 | 36.1% |
| 0-60 | 85.5 | 61.7% |
| 60-90 | 30.5 | 22% |
| 70-100 | 23.6 | 17% |
| 90-120 | 15.1 | 10.9% |
| 0-90 | 116.1 | 83.7% |
| 90-180 | 22.6 | 16.3% |
| 0-180 | 138.7 | 100% |

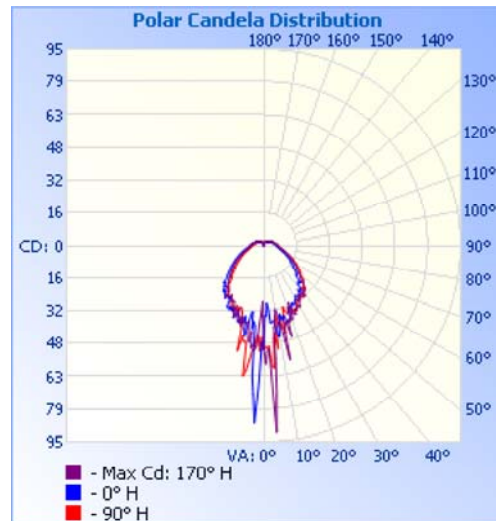

Lumens Per Zone

| Zone | Lumens | % Total | Zone | Lumens | % Total |
|-------|--------|---------|---------|--------|---------|
| 0-10 | 4.4 | 3.2% | 90-100 | 6.2 | 4.5% |
| 10-20 | 11.0 | 7.9% | 100-110 | 5.0 | 3.6% |
| 20-30 | 15.8 | 11.4% | 110-120 | 3.9 | 2.8% |
| 30-40 | 18.9 | 13.6% | 120-130 | 2.9 | 2.1% |
| 40-50 | 19.0 | 13.7% | 130-140 | 2.1 | 1.5% |
| 50-60 | 16.4 | 11.8% | 140-150 | 1.4 | 1% |
| 60-70 | 13.2 | 9.5% | 150-160 | 0.8 | 0.6% |
| 70-80 | 9.8 | 7.1% | 160-170 | 0.3 | 0.3% |
| 80-90 | 7.5 | 5.4% | 170-180 | 0.1 | 0% |

