

# KUZCO LIGHTING | LED

**Filename:** PD82548-BK-UNV-010 - Cirque

**Manufacturer:** KUZCO LIGHTING

**Luminaire:** PENDANT

**Luminaire Cat:** Cirque - PD82548 - BK - UNV - 010

**Lamp:** DC LED Module

**Lamp Cat:** DC LED Module

**Ballast Desc:** Vin = 120 - 277VAC, Iin = 0.72AMP max ; Vout = 42VDC, Iout = 1500mA

**Ballast Cat:** EPT - PVD63 - C150V42 - UNV8 - HE - P

**Lamp Output:** Total luminaire Lumens: 2544.8

**Max Candela:** 282.4 at Horizontal: 120°, Vertical: 3°

**Input Wattage:** 54.9

**Luminous Opening:** Circular (Dia: 1.97")

**Test:** 4359-26


**Test Date:** 28 July 2026

**Test Lab:** EVERFINE

**Photometry :** Type C

**CIE Class:** General Diffuse

**Cutoff Class:** Noncutoff

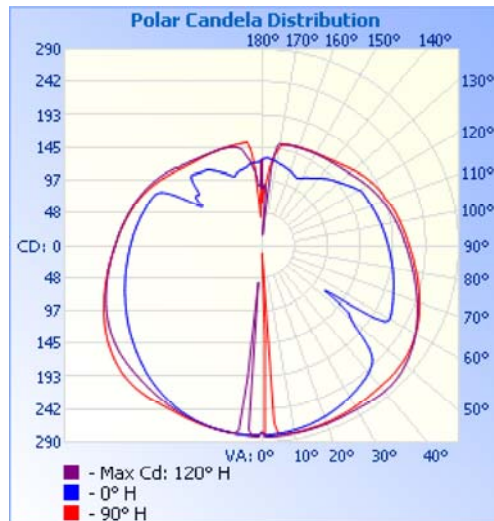

## Zonal Lumen Summary

| Zone   | Lumens  | % Luminaire |
|--------|---------|-------------|
| 0-30   | 228.5   | 9%          |
| 0-40   | 393.4   | 15.5%       |
| 0-60   | 808.6   | 31.8%       |
| 60-90  | 679.6   | 26.7%       |
| 70-100 | 662.1   | 26%         |
| 90-120 | 582.0   | 22.9%       |
| 0-90   | 1,488.2 | 58.5%       |
| 90-180 | 1,056.6 | 41.5%       |
| 0-180  | 2,544.8 | 100%        |

## Lumens Per Zone

| Zone  | Lumens | % Total | Zone    | Lumens | % Total |
|-------|--------|---------|---------|--------|---------|
| 0-10  | 26.2   | 1.0%    | 90-100  | 210.4  | 8.3%    |
| 10-20 | 77.4   | 3.0%    | 100-110 | 196.3  | 7.7%    |
| 20-30 | 124.8  | 4.9%    | 110-120 | 175.3  | 6.9%    |
| 30-40 | 164.9  | 6.5%    | 120-130 | 150.1  | 5.9%    |
| 40-50 | 197.0  | 7.7%    | 130-140 | 121.3  | 4.8%    |
| 50-60 | 218.2  | 8.6%    | 140-150 | 91.8   | 3.6%    |
| 60-70 | 227.9  | 9.0%    | 150-160 | 63.3   | 2.5%    |
| 70-80 | 229.7  | 9.0%    | 160-170 | 36.7   | 1.4%    |
| 80-90 | 222.0  | 8.7%    | 170-180 | 11.4   | 0.4%    |

