

# KUZCO LIGHTING | LED

**Filename:** PD95108-BG-UNV - Huron

**Manufacturer:** KUZCO LIGHTING

**Luminaire:** PENDANT

**Luminaire Cat:** PD95108-BG - Huron

**Lamp:** DC LED with DC Driver

**Lamp Cat:** DC LED with DC Driver

**Ballast Desc:** Vin = 100 - 135VAC , Iin = 0.4A ; Vout = 30 - 40VDC , Iout = 280mA

**Ballast Cat:** BQE15A - 0280 - 40 - TD

**Lamp Output:** Total luminaire Lumens: 1111.6

**Max Candela:** 129.6 at Horizontal: 160°, Vertical: 75°

**Input Wattage:** 12

**Luminous Opening:** Point

**Test:** 2983-25


**Test Date:** 17 January 2025

**Test Lab:** EVERFINE

**Photometry :** Type C

**CIE Class:** General Diffuse

**Cutoff Class:** Noncutoff

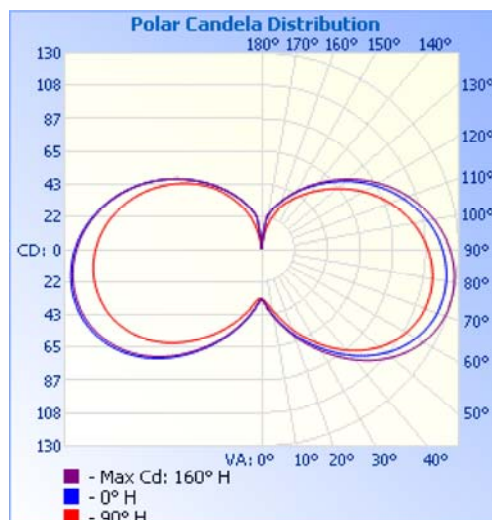

## Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	47.9	4.3%
0-40	97.9	8.8%
0-60	266.9	24%
60-90	364.7	32.8%
70-100	370.5	33.3%
90-120	313.0	28.2%
0-90	631.7	56.8%
90-180	479.9	43.2%
0-180	1,111.6	100%

## Lumens Per Zone

Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	3.7	0.3%	90-100	119.7	10.8%
10-20	14.3	1.3%	100-110	105.9	9.5%
20-30	29.8	2.7%	110-120	87.4	7.9%
30-40	50.0	4.5%	120-130	66.7	6%
40-50	73.2	6.6%	130-140	46.6	4.2%
50-60	95.8	8.6%	140-150	29.5	2.7%
60-70	113.9	10.2%	150-160	16.4	1.5%
70-80	124.5	11.2%	160-170	6.9	0.6%
80-90	126.4	11.4%	170-180	0.9	0.1%

