



**Filename:** TRS25925-WH-4K - Paolo

**Manufacturer:** KUZCO LIGHTING

**Luminaire:** Track Light

**Luminaire Cat:** Paolo - TRS25925 - WH - 4K - Test\_02

**Lamp:** DC LED with DC Driver

**Lamp Cat:** DC LED with DC Driver

**Ballast Desc:** Vin = 100 - 277VAC , Iin = 0.41AMP ; Vout = 48VDC , Iout = 0.75AMP

**Ballast Cat:** Hueuc - DCV - 36 - 48

**Lamp Output:** Total luminaire Lumens: 1000.9

**Max Candela:** 3,099.1 at Horizontal: 210°, Vertical: 1°

**Input Wattage:** 13

**Luminous Opening:** Rectangle (L: 4.57", W: 10")

**Test:** 3587--25

**Test Date:** 04 September 2025


**Test Lab:** EVERFINE

**Photometry :** Type C

**CIE Class:** Direct

**Cutoff Class:** Cutoff

**Nema Type:** 4 X 4

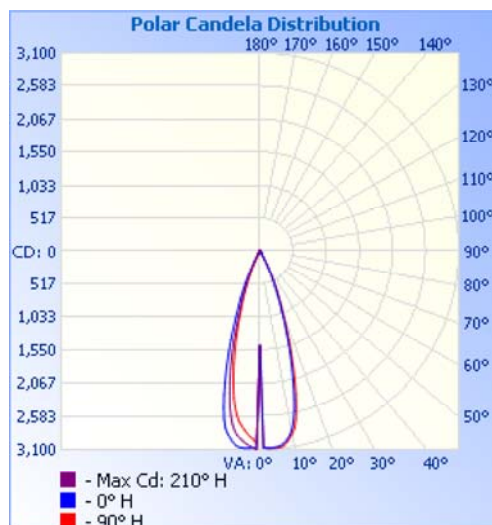

#### Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	926.8	92.6%
0-40	951.8	95.1%
0-60	980.8	98%
60-90	11.6	1.2%
70-100	4.5	0.4%
90-120	0.4	0%
0-90	992.4	99.1%
90-180	8.6	0.9%
0-180	1,000.9	100%

#### Lumens Per Zone

Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	276.0	27.6%	90-100	0.1	0%
10-20	484.4	48.4%	100-110	0.1	0%
20-30	166.5	16.6%	110-120	0.2	0%
30-40	25.0	2.5%	120-130	0.5	0.1%
40-50	17.3	1.7%	130-140	1.1	0.1%
50-60	11.8	1.2%	140-150	1.8	0.2%
60-70	7.2	0.7%	150-160	2.3	0.2%
70-80	3.4	0.3%	160-170	1.8	0.2%
80-90	1.0	0.1%	170-180	0.7	0.1%

