



**Filename:** VL52718-WT-UNV - Anello Minor

**Manufacturer:** KUZCO LIGHTING

**Luminaire:** VANITY

**Luminaire Cat:** Anello Minor - VL52718 - WT

**Lamp:** DC LED with DC Driver

**Lamp Cat:** DC LED with DC Driver

**Ballast Desc:** Vin = 120VAC , Iin = 0.17AMP ; Vout = 12 - 42VDC , Iout = 300mA

**Ballast Cat:** Novbo - NE012120030 - 2G

**Lamp Output:** Total luminaire Lumens: 727.9

**Max Candela:** 237.3 at Horizontal: 90°, Vertical: 1°

**Input Wattage:** 11.8

**Luminous Opening:** Circular (Dia: 4.92")

**Test:** 3444-25

**Test Date:** 02 July 2025


**Test Lab:** EVERFINE

**Photometry :** Type C

**CIE Class:** Direct

**Cutoff Class:** Semicutoff

**Nema Type:** 7 X 7

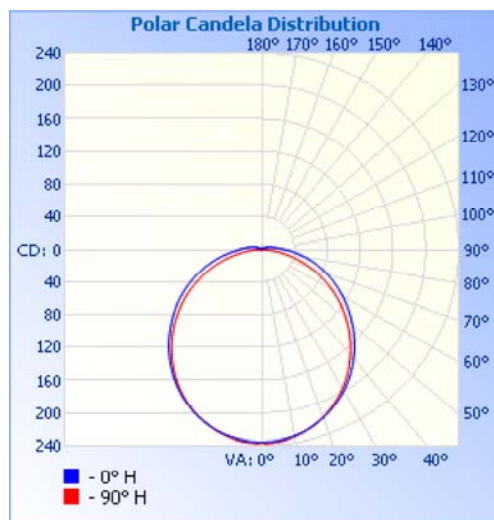

#### Zonal Lumen Summary

| Zone   | Lumens | % Luminaire |
|--------|--------|-------------|
| 0-30   | 182.4  | 25.1%       |
| 0-40   | 298.4  | 41%         |
| 0-60   | 528.9  | 72.7%       |
| 60-90  | 174.8  | 24%         |
| 70-100 | 98.8   | 13.6%       |
| 90-120 | 19.8   | 2.7%        |
| 0-90   | 703.7  | 96.7%       |
| 90-180 | 24.2   | 3.3%        |
| 0-180  | 727.9  | 100%        |

#### Lumens Per Zone

| Zone  | Lumens | % Total | Zone    | Lumens | % Total |
|-------|--------|---------|---------|--------|---------|
| 0-10  | 22.3   | 3.1%    | 90-100  | 11.7   | 1.6%    |
| 10-20 | 63.7   | 8.8%    | 100-110 | 5.5    | 0.8%    |
| 20-30 | 96.4   | 13.2%   | 110-120 | 2.6    | 0.4%    |
| 30-40 | 116.0  | 15.9%   | 120-130 | 1.3    | 0.2%    |
| 40-50 | 120.4  | 16.5%   | 130-140 | 1.0    | 0.1%    |
| 50-60 | 110.1  | 15.1%   | 140-150 | 0.8    | 0.1%    |
| 60-70 | 87.7   | 12.0%   | 150-160 | 0.7    | 0.1%    |
| 70-80 | 58.2   | 8.0%    | 160-170 | 0.4    | 0.1%    |
| 80-90 | 28.9   | 4.0%    | 170-180 | 0.2    | 0%      |

