

KUZCO LIGHTING | LED

Filename: WS30-044-BN - Vire

Manufacturer: KUZCO LIGHTING

Luminaire: WALL SCONCE

Luminaire Cat: WS30 - 044 - BN

Lamp: AC LED Module

Lamp Cat: AC LED Module

Ballast Desc: 120VAC , 50/60Hz

Lamp Output: Total luminaire Lumens: 2156.5

Max Candela: 469.3 at Horizontal: 2.5°, Vertical: 90°

Input Wattage: 26.5

Luminous Opening: Point

Test: 3067-25

Test Date: 11 February 2025

Test Lab: EVERFINE


Photometry : Type C

CIE Class: General Diffuse

Cutoff Class: Noncutoff


Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	37.5	1.7%
0-40	97.8	4.5%
0-60	359.5	16.7%
60-90	718.8	33.3%
70-100	781.5	36.2%
90-120	722.2	33.5%
0-90	1,078.3	50%
90-180	1,078.3	50%
0-180	2,156.5	100%

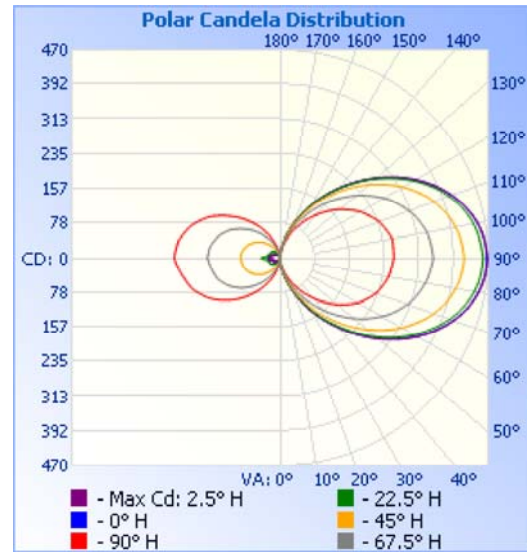

Lumens Per Zone

Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	1.0	0.0%	90-100	269.2	12.5%
10-20	8.6	0.4%	100-110	246.7	11.4%
20-30	27.8	1.3%	110-120	206.4	9.6%
30-40	60.3	2.8%	120-130	155.8	7.2%
40-50	105.0	4.9%	130-140	104.0	4.8%
50-60	156.7	7.3%	140-150	59.6	2.8%
60-70	206.4	9.6%	150-160	27.3	1.3%
70-80	244.8	11.3%	160-170	8.3	0.4%
80-90	267.6	12.4%	170-180	1.0	0%

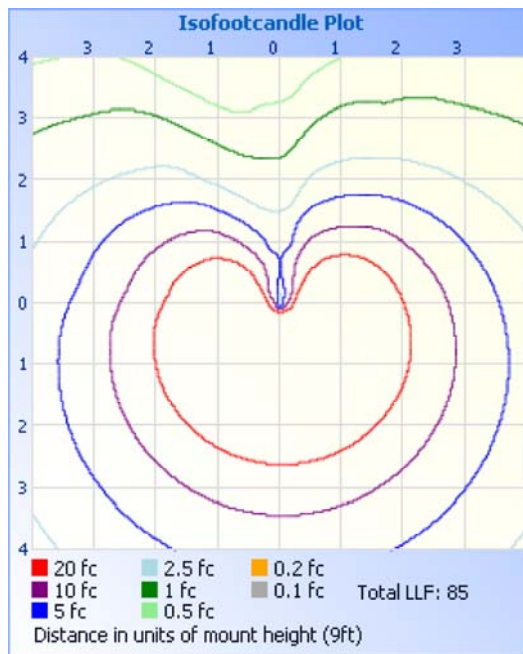

Illuminance at a Distance		
	Center Beam fc	Beam Width
1.5ft	0.73 fc	3.2 ft
3.0ft	0.18 fc	6.3 ft
4.5ft	0.08 fc	9.5 ft
6.0ft	0.05 fc	12.6 ft
7.5ft	0.03 fc	15.8 ft
9.0ft	0.02 fc	19.0 ft

■ Beam Spread: 92.9°