



Filename: WS63424-BK-UNV - Rezz

Manufacturer: KUZCO LIGHTING

Luminaire: WALL SCONCE

Luminaire Cat: Rezz - WS63424 - BK

Lamp: DC LED with DC Driver

Lamp Cat: DC LED with DC Driver

Ballast Desc: Vin = 120VAC , Iin = 0.32AMP ; Vout = 18 - 40VDC , Iout = 500mA

Ballast Cat: Novbo - NE024120050 - 2G

Lamp Output: Total luminaire Lumens: 359.5

Max Candela: 54.5 at Horizontal: 270°, Vertical: 3°

Input Wattage: 20.9

Luminous Opening: Point

Test: 3172-25


Test Date: 13 March 2025

Test Lab: EVERFINE

Photometry : Type C

CIE Class: Semi-Direct

Cutoff Class: Noncutoff

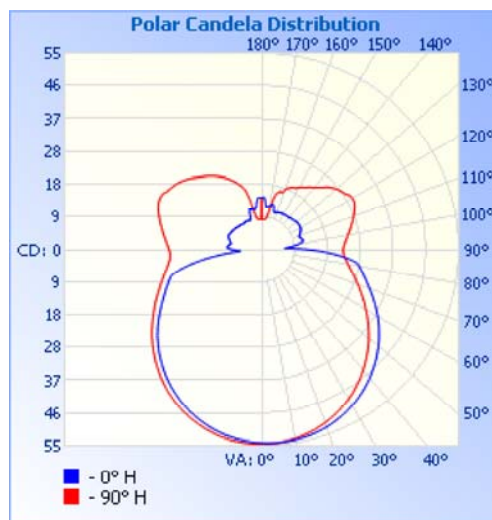


Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	43.3	12%
0-40	72.6	20.2%
0-60	138.4	38.5%
60-90	86.6	24.1%
70-100	79.9	22.2%
90-120	75.6	21%
0-90	225.1	62.6%
90-180	134.5	37.4%
0-180	359.5	100%

Lumens Per Zone

Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	5.1	1.4%	90-100	25.0	6.9%
10-20	14.9	4.2%	100-110	25.8	7.2%
20-30	23.2	6.5%	110-120	24.9	6.9%
30-40	29.3	8.1%	120-130	21.0	5.8%
40-50	32.6	9.1%	130-140	15.7	4.4%
50-60	33.2	9.2%	140-150	10.8	3%
60-70	31.7	8.8%	150-160	6.6	1.8%
70-80	29.1	8.1%	160-170	3.6	1%
80-90	25.8	7.2%	170-180	1.2	0.3%

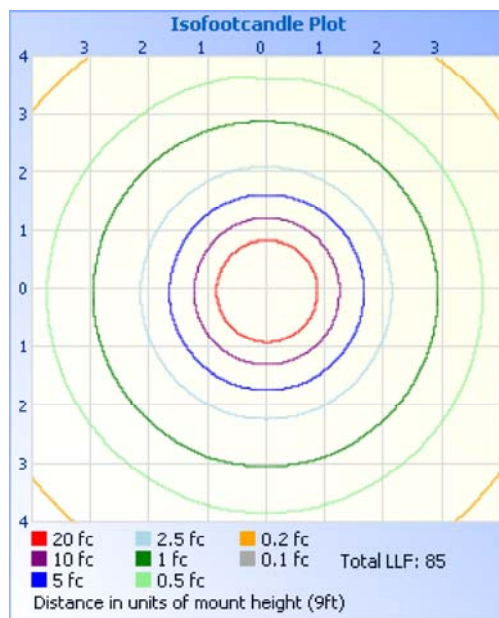

	Illuminance at a Distance	
	Center Beam fc	Beam Width
1.5ft	24.1 fc	12.5 ft 11.5 ft
3.0ft	6.03 fc	25.0 ft 22.9 ft
4.5ft	2.68 fc	37.5 ft 34.4 ft
6.0ft	1.51 fc	49.9 ft 45.9 ft
7.5ft	0.96 fc	62.4 ft 57.4 ft
9.0ft	0.67 fc	74.9 ft 68.8 ft

■ Vert. Spread: 153.0°
 ■ Horiz. Spread: 150.7°