



Filename: WS74114-BG - Motif

Manufacturer: KUZCO LIGHTING

Luminaire: WALL SCONCE

Luminaire Cat: Motif - WS74114 - BG

Lamp: DC LED with DC Driver

Lamp Cat: DC LED with DC Driver

Ballast Desc: Vin = 120VAC, Iin = 0.05AMP ; Vout = 27 - 40VDC, Iout = 100mA

Ballast Cat: Pingyi - PYB004C0100LED1WP

Lamp Output: Total luminaire Lumens: 345.4

Max Candela: 56.3 at Horizontal: 22.5°, Vertical: 90°

Input Wattage: 4.5

Luminous Opening: Circular (Dia: 4.92")

Test: 3204-25


Test Date: 20 March 2025

Test Lab: EVERFINE

Photometry : Type C

CIE Class: General Diffuse

Cutoff Class: Noncutoff

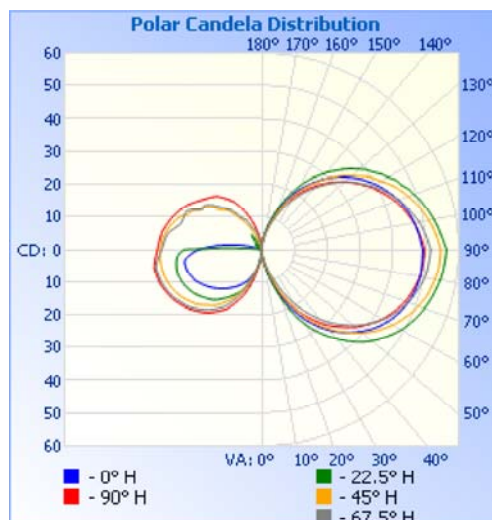

Zonal Lumen Summary

| Zone | Lumens | % Luminaire |
|--------|--------|-------------|
| 0-30 | 9.6 | 2.8% |
| 0-40 | 23.5 | 6.8% |
| 0-60 | 74.0 | 21.4% |
| 60-90 | 115.6 | 33.5% |
| 70-100 | 118.3 | 34.2% |
| 90-120 | 100.9 | 29.2% |
| 0-90 | 189.5 | 54.9% |
| 90-180 | 155.8 | 45.1% |
| 0-180 | 345.4 | 100% |

Lumens Per Zone

| Zone | Lumens | % Total | Zone | Lumens | % Total |
|-------|--------|---------|---------|--------|---------|
| 0-10 | 0.3 | 0.1% | 90-100 | 38.0 | 11% |
| 10-20 | 2.2 | 0.6% | 100-110 | 34.1 | 9.9% |
| 20-30 | 7.1 | 2.0% | 110-120 | 28.8 | 8.3% |
| 30-40 | 13.9 | 4.0% | 120-130 | 22.7 | 6.6% |
| 40-50 | 21.5 | 6.2% | 130-140 | 16.2 | 4.7% |
| 50-60 | 29.0 | 8.4% | 140-150 | 9.9 | 2.9% |
| 60-70 | 35.3 | 10.2% | 150-160 | 4.7 | 1.4% |
| 70-80 | 39.6 | 11.5% | 160-170 | 1.4 | 0.4% |
| 80-90 | 40.7 | 11.8% | 170-180 | 0.2 | 0% |

