

# KUZCO | LED LIGHTING | O

**Filename:** WV310205VBCL - Sutton

**Manufacturer:** KUZCO LIGHTING

**Luminaire:** WALL SCONCE / VANITY

**Luminaire Cat:** Sutton - WV310205VBCL

**Lamp:** DC LED Module

**Lamp Cat:** DC LED Module

**Ballast Desc:** Vin = 120 - 277VAC , Iin = 0.15AMP ; Vout = 27 - 42VDC , Iout = 250mA

**Ballast Cat:** Novbo - NE009277025 - 2GH

**Lamp Output:** Total luminaire Lumens: 690.6

**Max Candela:** 191.6 at Horizontal: 180°, Vertical: 177.5°

**Input Wattage:** 11

**Luminous Opening:** Circular (Dia: 1.97")

**Test:** 4351-26


**Test Date:** 24 July 2026

**Test Lab:** EVERFINE

**Photometry :** Type C

**CIE Class:** General Diffuse

**Cutoff Class:** Noncutoff

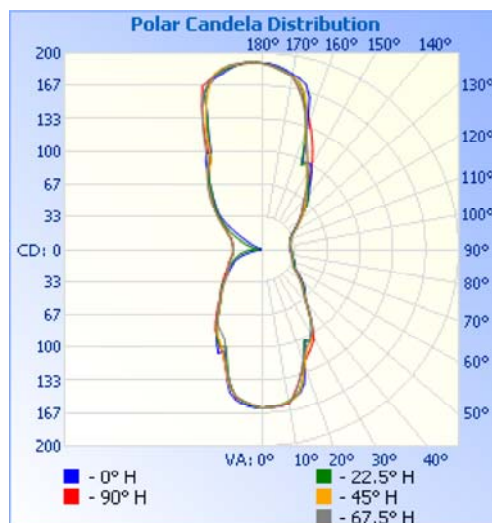

## Zonal Lumen Summary

| Zone   | Lumens | % Luminaire |
|--------|--------|-------------|
| 0-30   | 103.7  | 15%         |
| 0-40   | 155.0  | 22.5%       |
| 0-60   | 240.7  | 34.9%       |
| 60-90  | 96.0   | 13.9%       |
| 70-100 | 86.6   | 12.5%       |
| 90-120 | 85.3   | 12.3%       |
| 0-90   | 336.8  | 48.8%       |
| 90-180 | 353.9  | 51.2%       |
| 0-180  | 690.6  | 100%        |

## Lumens Per Zone

| Zone  | Lumens | % Total | Zone    | Lumens | % Total |
|-------|--------|---------|---------|--------|---------|
| 0-10  | 15.1   | 2.2%    | 90-100  | 26.3   | 3.8%    |
| 10-20 | 39.0   | 5.7%    | 100-110 | 27.2   | 3.9%    |
| 20-30 | 49.6   | 7.2%    | 110-120 | 31.7   | 4.6%    |
| 30-40 | 51.4   | 7.4%    | 120-130 | 41.4   | 6%      |
| 40-50 | 45.9   | 6.7%    | 130-140 | 50.2   | 7.3%    |
| 50-60 | 39.8   | 5.8%    | 140-150 | 55.7   | 8.1%    |
| 60-70 | 35.7   | 5.2%    | 150-160 | 55.8   | 8.1%    |
| 70-80 | 32.0   | 4.6%    | 160-170 | 47.8   | 6.9%    |
| 80-90 | 28.3   | 4.1%    | 170-180 | 17.8   | 2.6%    |

