

KUZCO LIGHTING | LED

Filename: WV321201PN - Marni

Manufacturer: KUZCO LIGHTING

Luminaire: WALL SCONCE / VANITY

Luminaire Cat: Marni - WV321201PN

Lamp: DC LED with DC Driver

Lamp Cat: DC LED with DC Driver

Ballast Desc: Vin = 120 - 277VAC, Iin = 0.15AMP; Vout = 12 - 42VDC, Iout = 160mA

Ballast Cat: Novbo - NE007277016 - 2GH

Lamp Output: Total luminaire Lumens: 300.9

Max Candela: 91.5 at Horizontal: 50°, Vertical: 132.5°

Input Wattage: 6.6

Luminous Opening: Point

Test: 3151-25


Test Date: 06 March 2025

Test Lab: EVERFINE

Photometry : Type C

CIE Class: Semi-Indirect

Cutoff Class: Noncutoff

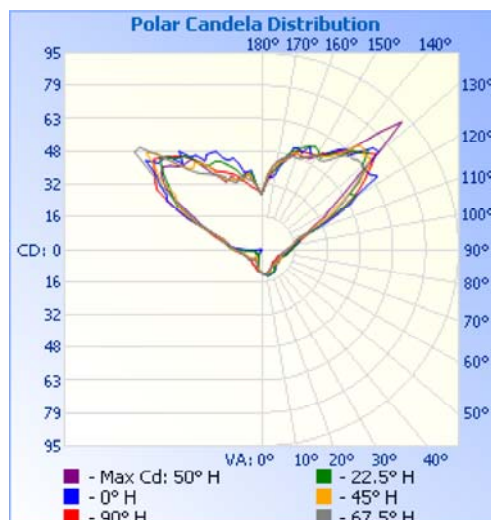

Zonal Lumen Summary

| Zone | Lumens | % Luminaire |
|--------|--------|-------------|
| 0-30 | 7.6 | 2.5% |
| 0-40 | 12.1 | 4% |
| 0-60 | 24.4 | 8.1% |
| 60-90 | 29.2 | 9.7% |
| 70-100 | 37.8 | 12.6% |
| 90-120 | 75.1 | 25% |
| 0-90 | 53.6 | 17.8% |
| 90-180 | 247.3 | 82.2% |
| 0-180 | 300.9 | 100% |

Lumens Per Zone

| Zone | Lumens | % Total | Zone | Lumens | % Total |
|-------|--------|---------|---------|--------|---------|
| 0-10 | 1.1 | 0.4% | 90-100 | 16.3 | 5.4% |
| 10-20 | 2.8 | 0.9% | 100-110 | 22.1 | 7.4% |
| 20-30 | 3.8 | 1.3% | 110-120 | 36.6 | 12.2% |
| 30-40 | 4.5 | 1.5% | 120-130 | 52.4 | 17.4% |
| 40-50 | 5.6 | 1.8% | 130-140 | 48.9 | 16.3% |
| 50-60 | 6.7 | 2.2% | 140-150 | 33.4 | 11.1% |
| 60-70 | 7.8 | 2.6% | 150-160 | 22.1 | 7.3% |
| 70-80 | 9.3 | 3.1% | 160-170 | 12.1 | 4% |
| 80-90 | 12.1 | 4.0% | 170-180 | 3.3 | 1.1% |

