

### START FROM HERE

- Make sure power is completely off at the fuse box.
- Have your fixture installed by a qualified licensed electrician
- Prepare everything in a clear area.
- Wear gloves at all times during this installation.
- Read instructions carefully before you start assembly.
- Keep this instruction sheet for future reference.


Technical Support: 1-855-855-8926

### Please Note:

- This Kuzco LED fixture comes with pre-wired LED module(s)
- Unless instructed, Do Not touch any part of the LED module(s) as any unnecessary contact with the module could cause permanent damage
- For dimming, an ELV (Electronic Low Voltage) or TRIAC or 0-10V type of dimmer is required
- 120-277V input

1. Remove fixture from its original package
2. Pull magnetic plate (2k) off bottom of canopy (2a) to gain access
3. Attach canopy (2a) to electrical junction box (1a) using screws provided (1e) in hardware package and then secure canopy (2a) to mounting surface with additional screws (1h)
4. To change fixture height, push and hold wire gripper (2g), slide wire to desired length and then release wire gripper (2g) to secure
5. Make proper electrical connections (black to hot "L", white to neutral "N", ground to "GND") with wire nuts (1b) provided in hardware package. Connect 0-10V dimming wire, DIM+ to purple, DIM- to gray, with wire nuts provided
6. Fine tune wire length if necessary, by push and hold wire gripper (2g) and then adjust wire to desired length
7. Loosely wrap extra wires around wire clips (2i) and close to secure
8. Close canopy (2a) by re-attach magnetic plate (2k), make sure no electrical wires or support cables are in the way

Wires	
Hot (Black)	—
Neutral (White)	—
Ground	-----
Dim - (Gray)	—
Dim + (Purple)	—

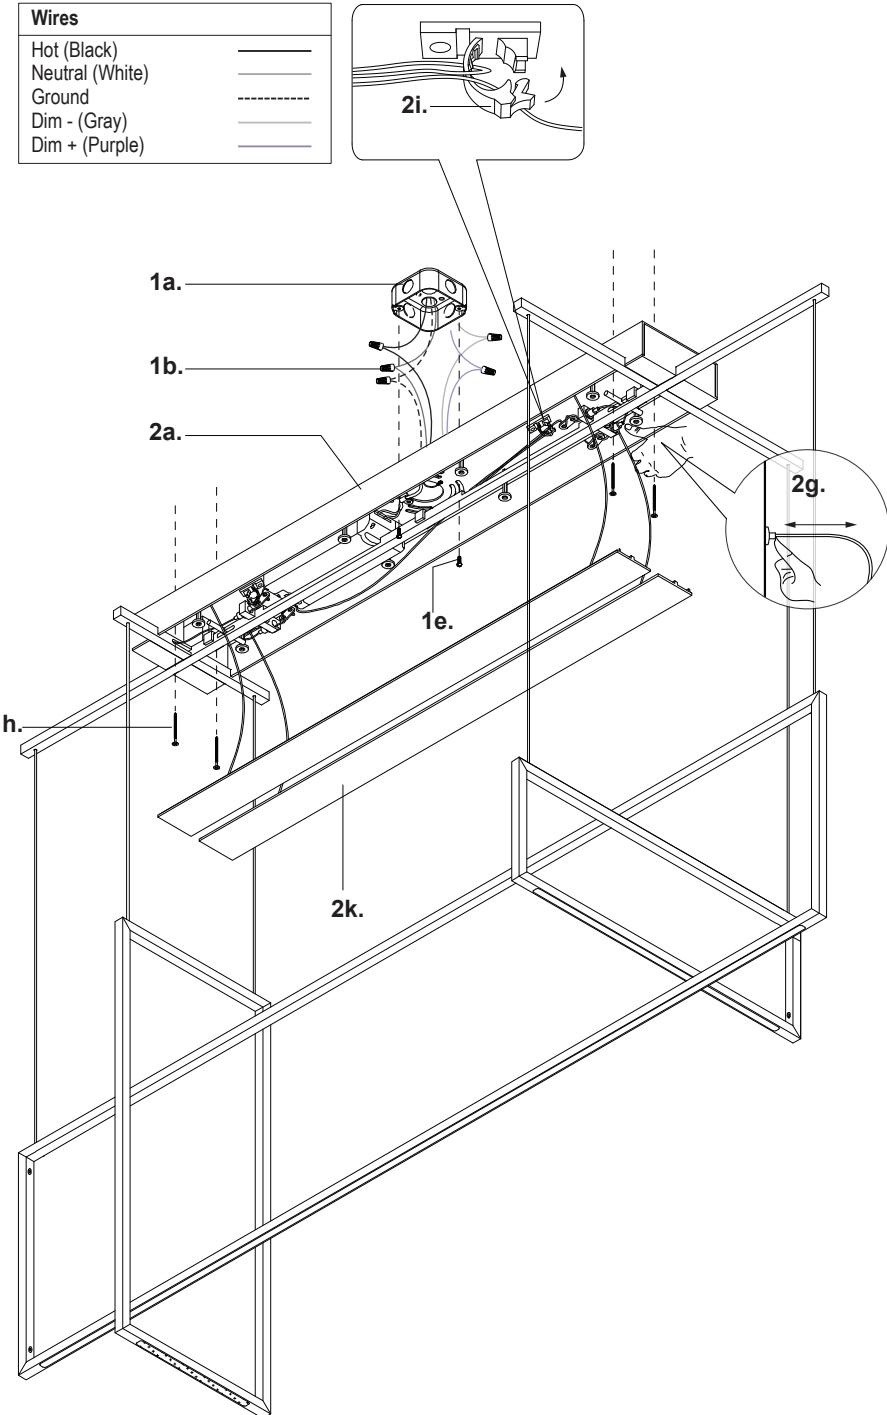

K U Z C O.

19054 28th Avenue Surrey, BC Canada V3Z 6M3  
 T: 604 538 7162 TF: 1-855 85 KUZCO F: 604 538 7196  
 W: [kuzcolighting.com](http://kuzcolighting.com)  
 20240826