



110-400 WHT RIBBED CAP WITH SURESEAL

Part #: 3601

Size:	110-400
Color:	WHITE
Material:	PP
Style:	RIBBED CAP
Additional Info:	SURESEAL LINER
Case Pack:	333/EACH
Pallet Pack:	4,995/EACH



SHALLOW SKIRTED CLOSURES

110-400-9613 S



Specifications:

DIAMETER 110 mm
THREAD PROFILE 400
NECK FINISH 110-400
CLOSURE TOP Stipple
CLOSURE SIDEWALL Fine Ribbed
MATERIAL PP

PACKAGING & FREIGHT INFORMATION

PACK TYPE	PCS/CTN	CTNS/PALT	PCS/PALT	CTN WT*	PALT WT*	FRT CLASS
Stack	333	15	4,995	17 ⁽¹⁾	257 ⁽¹⁾	150 ⁽¹⁾
Stack	333	15	4,995	20 ⁽²⁾	293 ⁽²⁾	125 ⁽²⁾
CARTON DIMENSIONS: 24 x 16 x 15				PALLET DIMENSIONS: 48 x 40 x 50		

(1) Unlined Closures (2) Lined Closures *Approximate

MARKETS

Agricultural, Automotive, Industrial, and Medical Products, Food, Food Service, Personal Care & Cosmetics, Pharmaceuticals, Peanut Butter & Nuts, Powdered Drinks, Dressings & Sauces.

OPTIONS

Available in white, standard, and custom colors.
 Liners can be cut with tri-tab easy-open feature
 Can be embossed/debossed with custom message.
 Offset printing is available in up to three colors.

CLOSURE BENEFITS

- A great general-purpose closure
- Fine-ribbed sides are easier to grip
- Our most popular closure style
- Utilized for peanut butter


PHOENIXTM


PHXPKG.COM

P 630 420 4750 **E** greatpkg@phxpkg.com
 1899 High Grove Lane Naperville, IL 60540



SHALLOW SKIRTED CLOSURES

110-400-9613 S

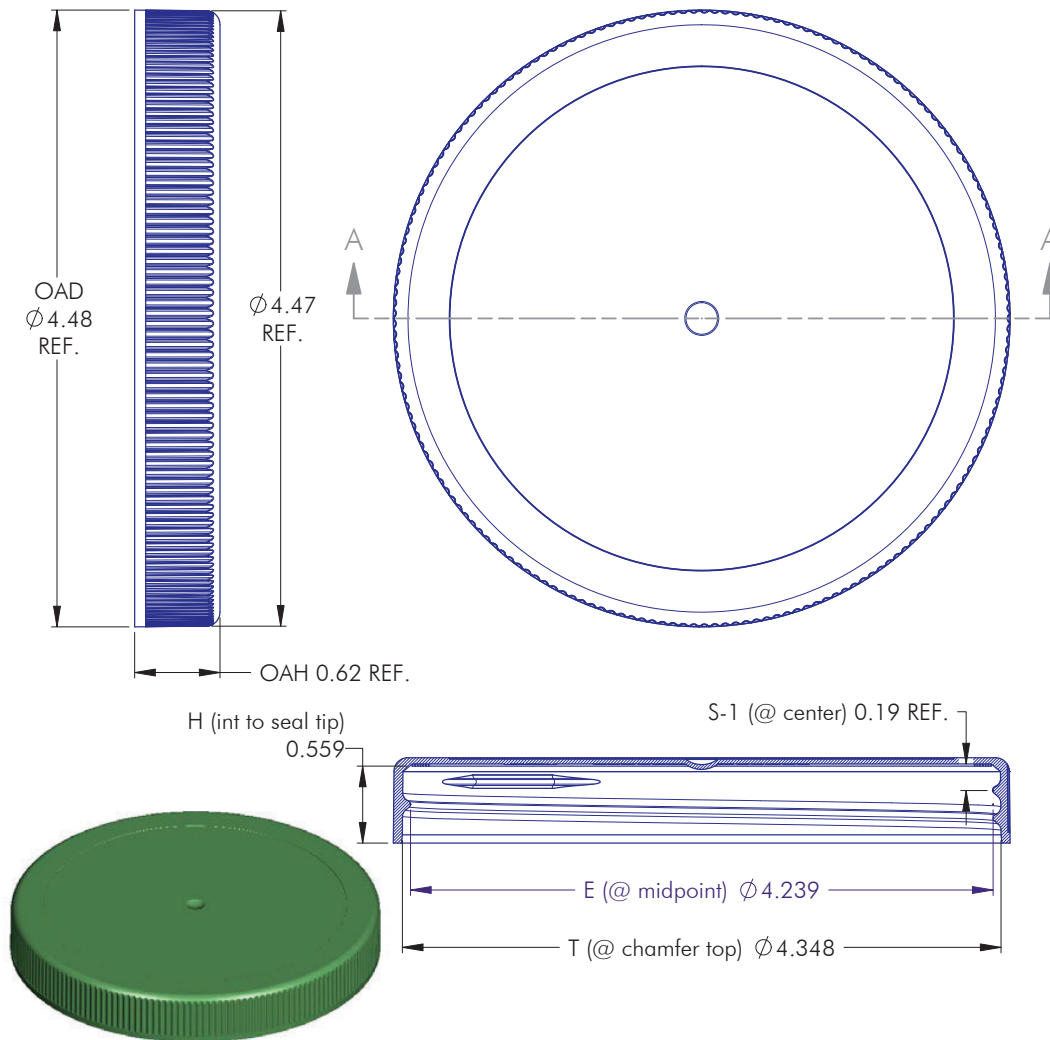


NOTES: (UNLESS OTHERWISE SPECIFIED) 1. ALL DIMENSIONS ARE IN INCHES. 2. SEE CHART FOR DIMENSIONAL TOLERANCE.				3	03.03.10	Update "E" Dimension		DN
				REV	DATE	DESCRIPTION		BY
THIS OR FACSIMILE THEREOF IS THE EXCLUSIVE PROPERTY OF PHOENIX AND MAY NOT BE REPRODUCED WITHOUT THE EXPRESSED WRITTEN CONSENT OF PHOENIX. SOME OR ALL OF THE ITEMS DEPICTED ON THIS DRAWING MAY BE COVERED BY CURRENT PATENTS OR PATENTS APPLIED FOR BY PHOENIX.				TOLERANCE	PITCH/TPI	.200 / 5	TURNS	1-1/4
				.X	±0.1	DRAWN	DMN	DATE
				.XX	±0.02	DATE	06.29.09	SCALE
				.XXX	±0.010	SCALE	1 : 1	REV
110 - 400 - 9613 S								3



SHALLOW SKIRTED CLOSURES

110-400-9613 S

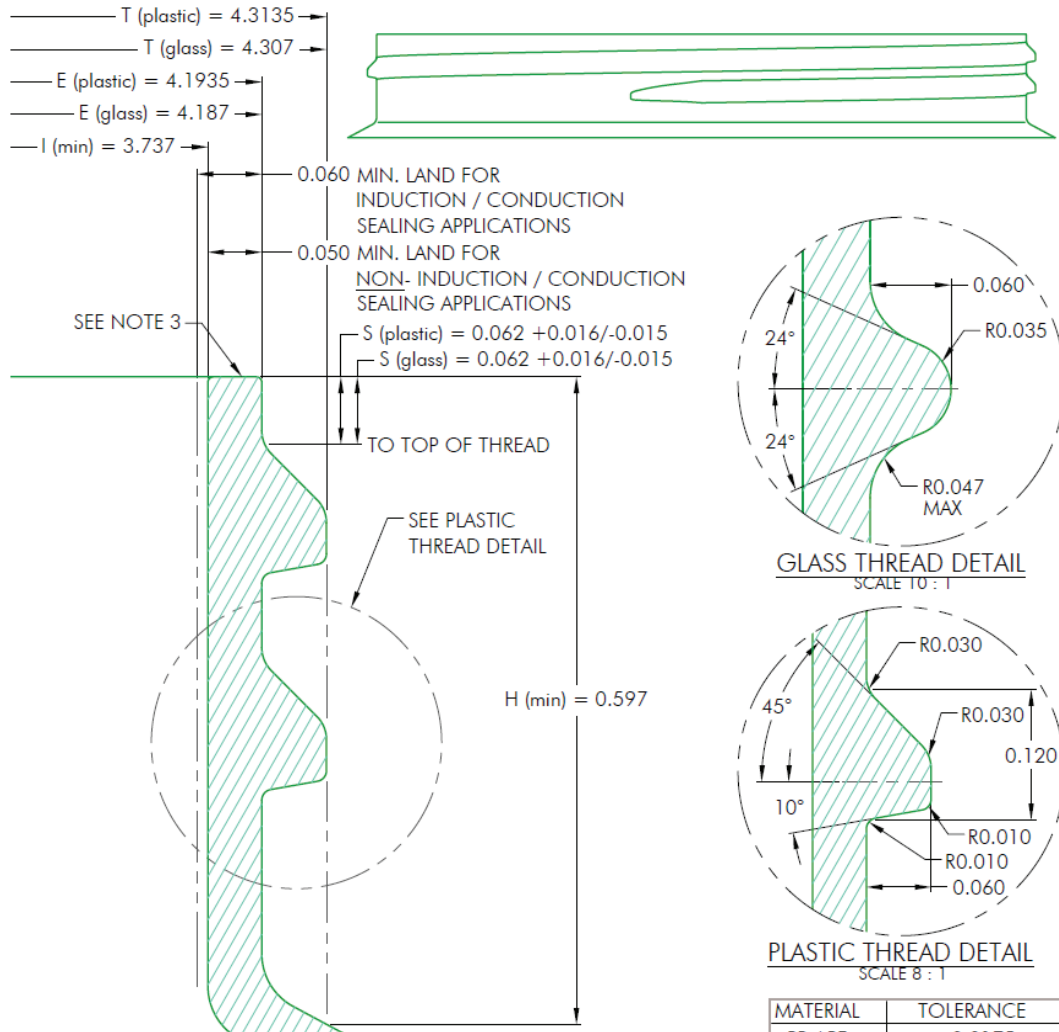

MATERIAL	TOLERANCE
PP / PE	± 0.0175
PET	± 0.012
GLASS	± 0.024

NOTES: (UNLESS OTHERWISE SPECIFIED)				0	11.17.97	Released	BZ
1. ALL DIMENSIONS ARE IN INCHES.				REV	DATE	DESCRIPTION	BY
2. SEE CHART FOR DIMENSIONAL TOLERANCE.							
THIS OR FACSIMILE THEREOF IS THE EXCLUSIVE PROPERTY OF PHOENIX AND MAY NOT BE REPRODUCED WITHOUT THE EXPRESSED WRITTEN CONSENT OF PHOENIX. SOME OR ALL OF THE ITEMS DEPICTED ON THIS DRAWING MAY BE COVERED BY CURRENT PATENTS OR PATENTS APPLIED FOR BY PHOENIX.				TOLERANCE	PITCH/TPI	TURN	MAT'L
				.X	±0.1	.200 / 5	1-1/4
				.XX	±0.02	DRAWN	BEZ
				.XXX	±0.010	DATE	11.17.97
				SCALE			8 : 1
				110 - 400 - FINISH			0





SureSeal[®] 200 Series

Product Name:	SureSeal[®] 200 Series
Product Type:	One piece, three-ply coextruded liner.
Material:	Low density polyethylene skin top and bottom with foamed polyolefin core.
Composition:	Core and outer skin fusion. Closed cell foam core of LDPE is sandwiched between polyethylene skin. This results in a chemically fused, single polymeric product.
Composition Benefits:	Symmetrical construction - either side serves as the liner face. Single polymeric product - no ply-separation.
Application:	Applications have provided positive sealing for foods, beverages, pharmaceuticals, cosmetics, industrial and household chemicals. For US and EU food contact applications.
Performance Values:	Excellent sealability and resiliency.
Thickness/Width:	Available in thicknesses of .020" to .060" (+/- .005") Widths from 1" to 36" (+/- .03125")
Density:	SureSeal [®] 222 = 24 < 28 lbs/ft ³ SureSeal [®] 226 = 26 < 30 lbs/ft ³
Color:	Custom colors or natural color available upon request.