

Represented by



Product Specification Sheet

Illing Part#

3611PE

89-400 WHITE PP CLOSURE W-PE FOAM LND

Part #: 3611PE

Size:	89-400
Color:	WHITE
Material:	PP
Style:	89MM Market Closure
Additional Info:	
Case Pack:	300 each
Pallet Pack:	7,200 each



www.illingpackaging.com

Represented by



ILLINGTM
P A C K A G I N G



Product Specification Sheet

Illing Part#



3611PE

NOTE: 1. Contact Olcott to confirm most recent dimensions prior to manufacturing of componentry.
2. Specifications shown are reserved for white polypropylene closures.
3. This closure has liner retainer and sealing ring features.

PROPRIETARY AND CONFIDENTIAL:
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF OLCOTT PLASTICS.
ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF OLCOTT PLASTICS IS PROHIBITED.

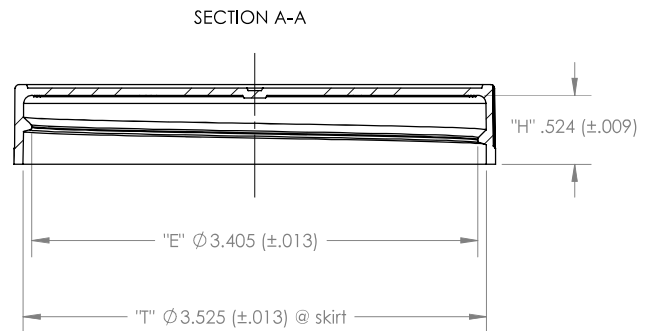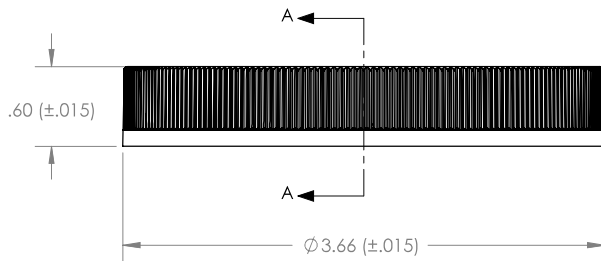

Property of Olcott Plastics



DRAWING NAME: PART DWG - C089PPTMC - MCH016-042			
PART NAME: 89mm Market Closure	PART #: C089PPTMC : MCH016-042	REV: G	
Olcott Plastics 95 N. 17TH STREET PH: (630) 584-0555 ST. CHARLES, IL 60174 FX: (630) 584-5655 www.olcottplastics.com		2 0 2 0	BY: DATE:
		DRAWN	S.B. 4/17/2020
		CHECKED	S.B. 4/17/2020
		APPROVED	D.J.C. 4/17/2020
THREAD PITCH: 5 T.P.I.		# OF THREAD TURNS: 1-1/8 TURNS	ANGULAR TOLERANCE ± 1/2 DEGREE
GATE LOCATION: EXTERIOR - TOP		PART WEIGHT: 15.0 Grams (±5%)	THIRD ANGLE PROJECTION
MATERIAL: POLYPROPYLENE		EXTERIOR SURFACE: TEXTURE FINISH	SHEET SCALE: FULL SHEET SIZE: A
		TOLERANCES (UNLESS SPECIFIED)	DIMENSIONS ARE IN INCHES .00 = ±.015 .000 = ±.010



SureSeal® 200 Series

Product Name:	SureSeal® 200 Series
Product Type:	One piece, three-ply coextruded liner.
Material:	Low density polyethylene skin top and bottom with foamed polyolefin core.
Composition:	Core and outer skin fusion. Closed cell foam core of LDPE is sandwiched between polyethylene skin. This results in a chemically fused, single polymeric product.
Composition Benefits:	Symmetrical construction - either side serves as the liner face. Single polymeric product - no ply-separation.
Application:	Applications have provided positive sealing for foods, beverages, pharmaceuticals, cosmetics, industrial and household chemicals.
Compatibility:	SureSeal® 200 Series is chemically inert, odorless, tasteless and dust-free. Good resistance to acids, alkalies, slow solvents, alcohols, oils and aqueous products. Poor resistance to active hydrocarbon solvents.
Performance Values:	Excellent sealability, resiliency and compression recovery. Excellent torque retention.
Thickness/Width:	Available in thicknesses of .020" to .060" (+/- .005") Widths from 1" to 36" (+/- .031")
Density:	SureSeal® 222 = 24 < 28 lbs/ft ³ SureSeal® 226 = 26 < 30 lbs/ft ³
Color:	FDA approved white. Custom colors available upon request.
FDA Status:	Drug Master File #12831. This material complies with FDA regulation 177.1520(c)3.1 for food contact application.