



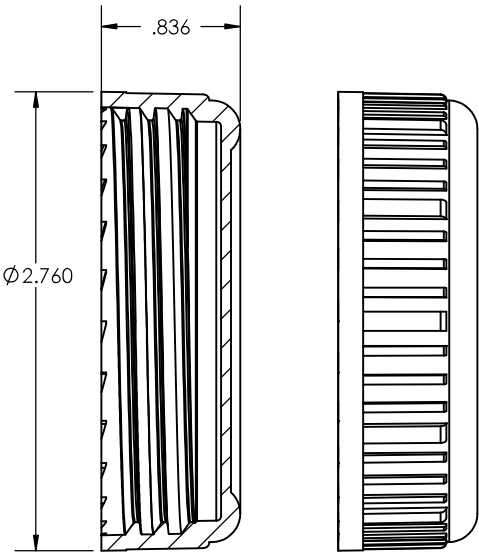


63-485SL BLACK CAP .035 PE FOAM (F217)

Part #: 3626FB

Size:	63-485
Color:	BLACK
Material:	PP
Style:	
Additional Info:	FOAM LINER
Case Pack:	525/CTN
Pallet Pack:	18,375

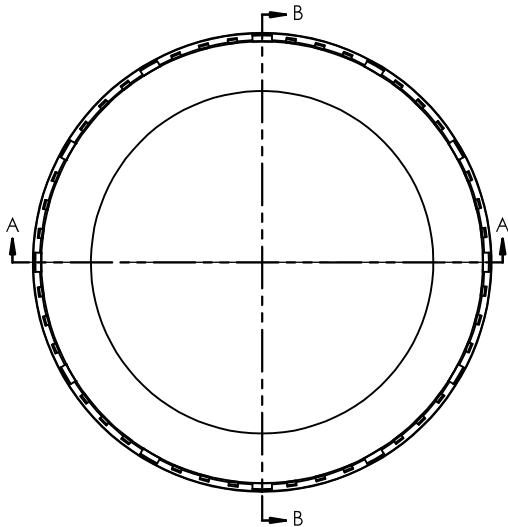


SECTION B-B

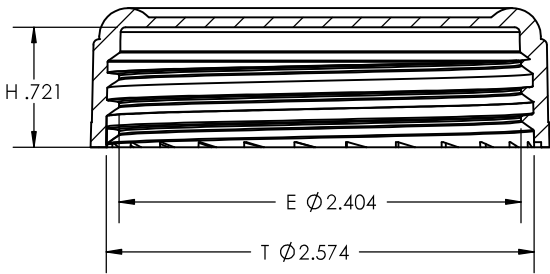

SECTION A-A

6 THREADS PER INCH
.167 LEAD 2 TURNS

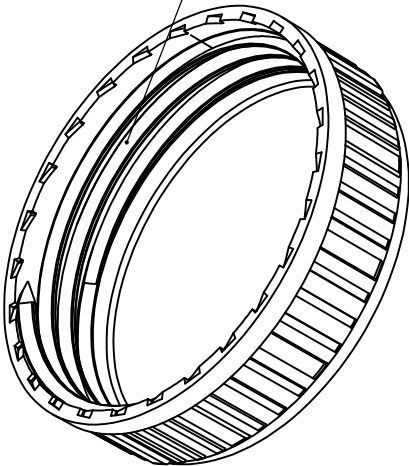

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
RELIABLE CAPS LLC. ANY REPRODUCTION IN
PART OR AS A WHOLE WITHOUT THE WRITTEN
PERMISSION OF RELIABLE CAPS LLC IS
PROHIBITED.

		DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL ± ANGULAR: MACH ± BEND ± TWO PLACE DECIMAL ±.015 THREE PLACE DECIMAL ±.008	NAME PRS	DATE 4/15/10	Reliable Caps LLC
		MATERIAL polypropylene copoly	CHECKED		63-485 SL
		FINISH	ENG APPR.		
			MFG APPR.		
NEXT ASSY	USED ON		Q.A.		
APPLICATION		DO NOT SCALE DRAWING	COMMENTS:		
			SIZE A	DWG. NO. 63-485 SL L	REV.
			SCALE:1:1	WEIGHT:	SHEET 2 OF 2

Represented by



Product Specification Sheet

Illing Part#


3626BF



900 Bradley Hill Road, Blauvelt, New York 10913 (845) 353-3300 FAX: (845) 353-3376

TECHNICAL DATA SHEET

F- 217

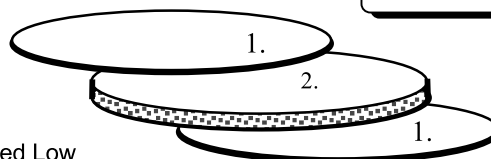

Description: Three -ply co-extruded material; Foamed Low Density Polyethylene Core (2.) Between Two Solid Layers Of Low Density Polyethylene (1.).

SPECIFICATIONS

Thickness			Available Web Width		
Minimum In (mm)	Maximum In (mm)	Deviation In (mm)	Minimum In (mm)	Maximum In (mm)	Deviation In (mm)
0.020 (0.51)	0.060 (1.52)	+/-0.005 (0.127)	1.0 (25.4)	25.0 (635.0)	+/-1/16 (1.6)
0.065 (1.65)	0.090 (2.29)	+/-0.007 (0.178)	1.0 (25.4)	9.00 (228.6)	+/-1/16 (1.6)
0.095 (2.41)	0.125 (3.18)	+/-0.010 (0.254)	1.0 (25.4)	9.00 (228.6)	+/-1/16 (1.6)

Density	Deviation
25 lbs/ft ³	+/-2 lbs/ft ³

Code of Federal Regulations Compliance: Complies to the following CFR's

21CFR177.1520	Olefin polymers.
21CFR177.1210	Closures with sealing gaskets for food containers.
21CFR178.2010	Antioxidants and or stabilizers for polymers.
21CFR175.300	Resinous and polymeric coatings.

Original Date: 08/05/97
Revision Date: 06/13/01
Revision Number: 1

FDA Status: The component materials of F-217 are listed under DMF 2434.

The aforementioned technical information and any recommendation are based on Tri-Seal's Laboratory Findings and are believed to be true and accurate, but we strongly recommend that our customers perform appropriate tests they feel necessary to ensure the compatibility and stability of any given product with ours. Tri-Seal, a Tekni-Plex Co. guarantees to replace any quantity proved to be defective. We will not be held liable for any injury, loss or change, whether direct, incidental or consequential, due to the use of or inability to use the product due to a breach of warranty of any agreement between Tri-Seal and the purchaser. Unless contained in this data sheet or agreed to in writing by the officers of the seller and user no other warranty will be honored.