




28-400 WHITE PP RIBBED / MATTE TOP CAP WITH FOAM LINER (F217)


Part #: 3628W

Size:	28-400 NECK
Color:	WHITE
Material:	PP
Style:	RIBBED (MATTE TOP CAP)
Additional Info:	FOAM LINER (F217)
Case Pack:	6,250 / EACH
Pallet Pack:	93,750 / EACH

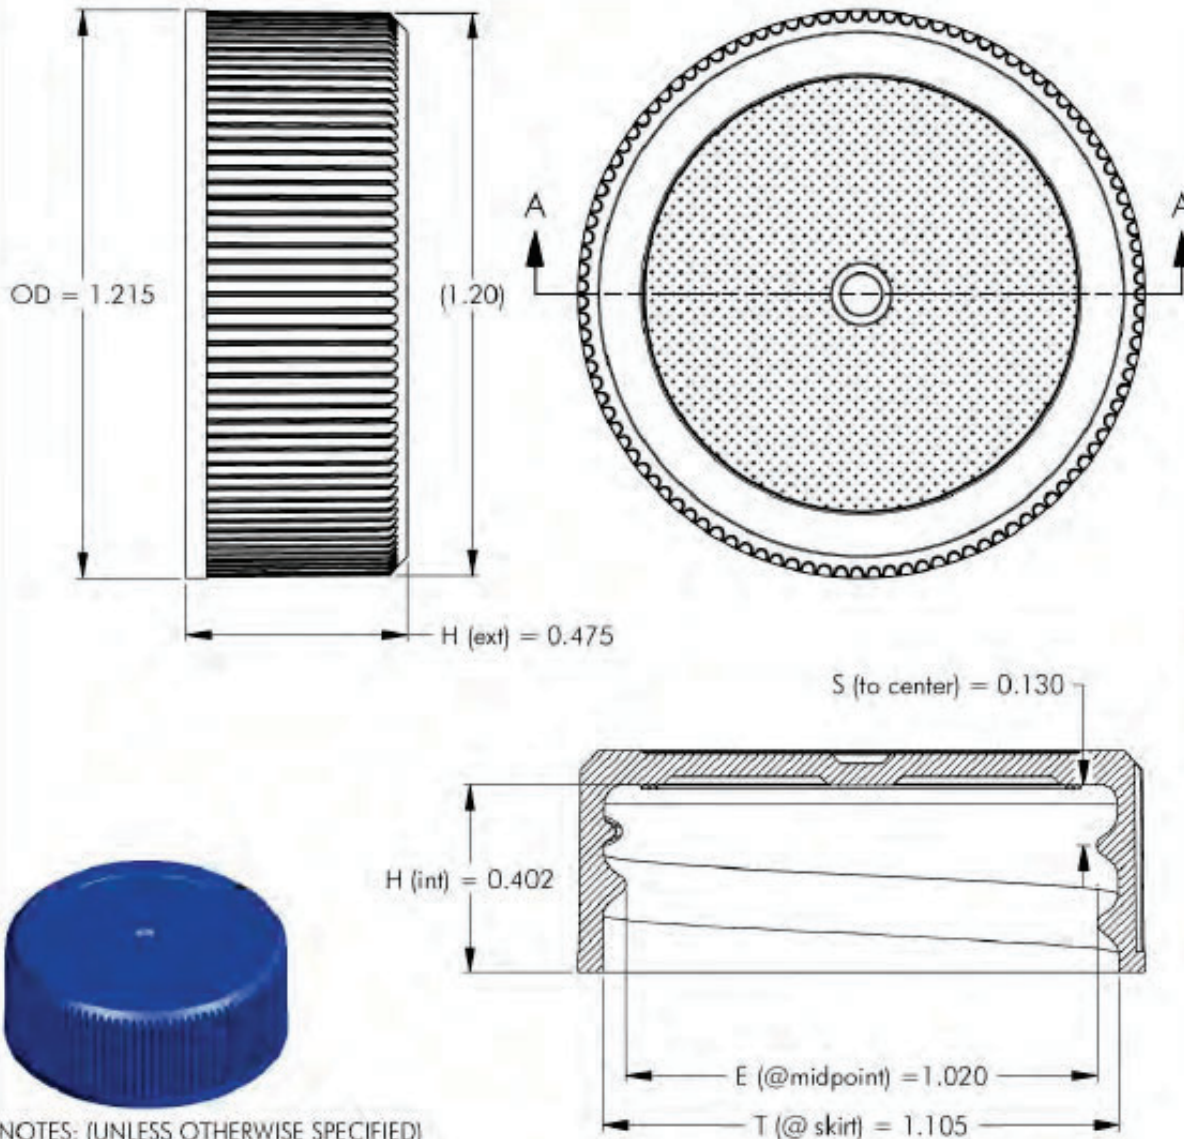

NOTES: (UNLESS OTHERWISE SPECIFIED)
1. ALL DIMENSIONS ARE IN INCHES.
2. TOLERANCE ON ALL DIMENSIONS IS ± 0.010 ".

1	12.13.05	prod. E dim	bz	PITCH (TPI): 6	# OF TURNS: 1-1/8	MATERIAL: POLYPROPYLENE
REV	DATE	DESCRIPTION	BY	DRAWING #: 28 - 400 - 62S		SCALE: 3 : 1
				DESCRIPTION: FINE RIB / MATTE FINISH TOP		
DRAWN BY: BEZ		DATE: 10.25.04		APPROVED BY: LRE		REV: 1

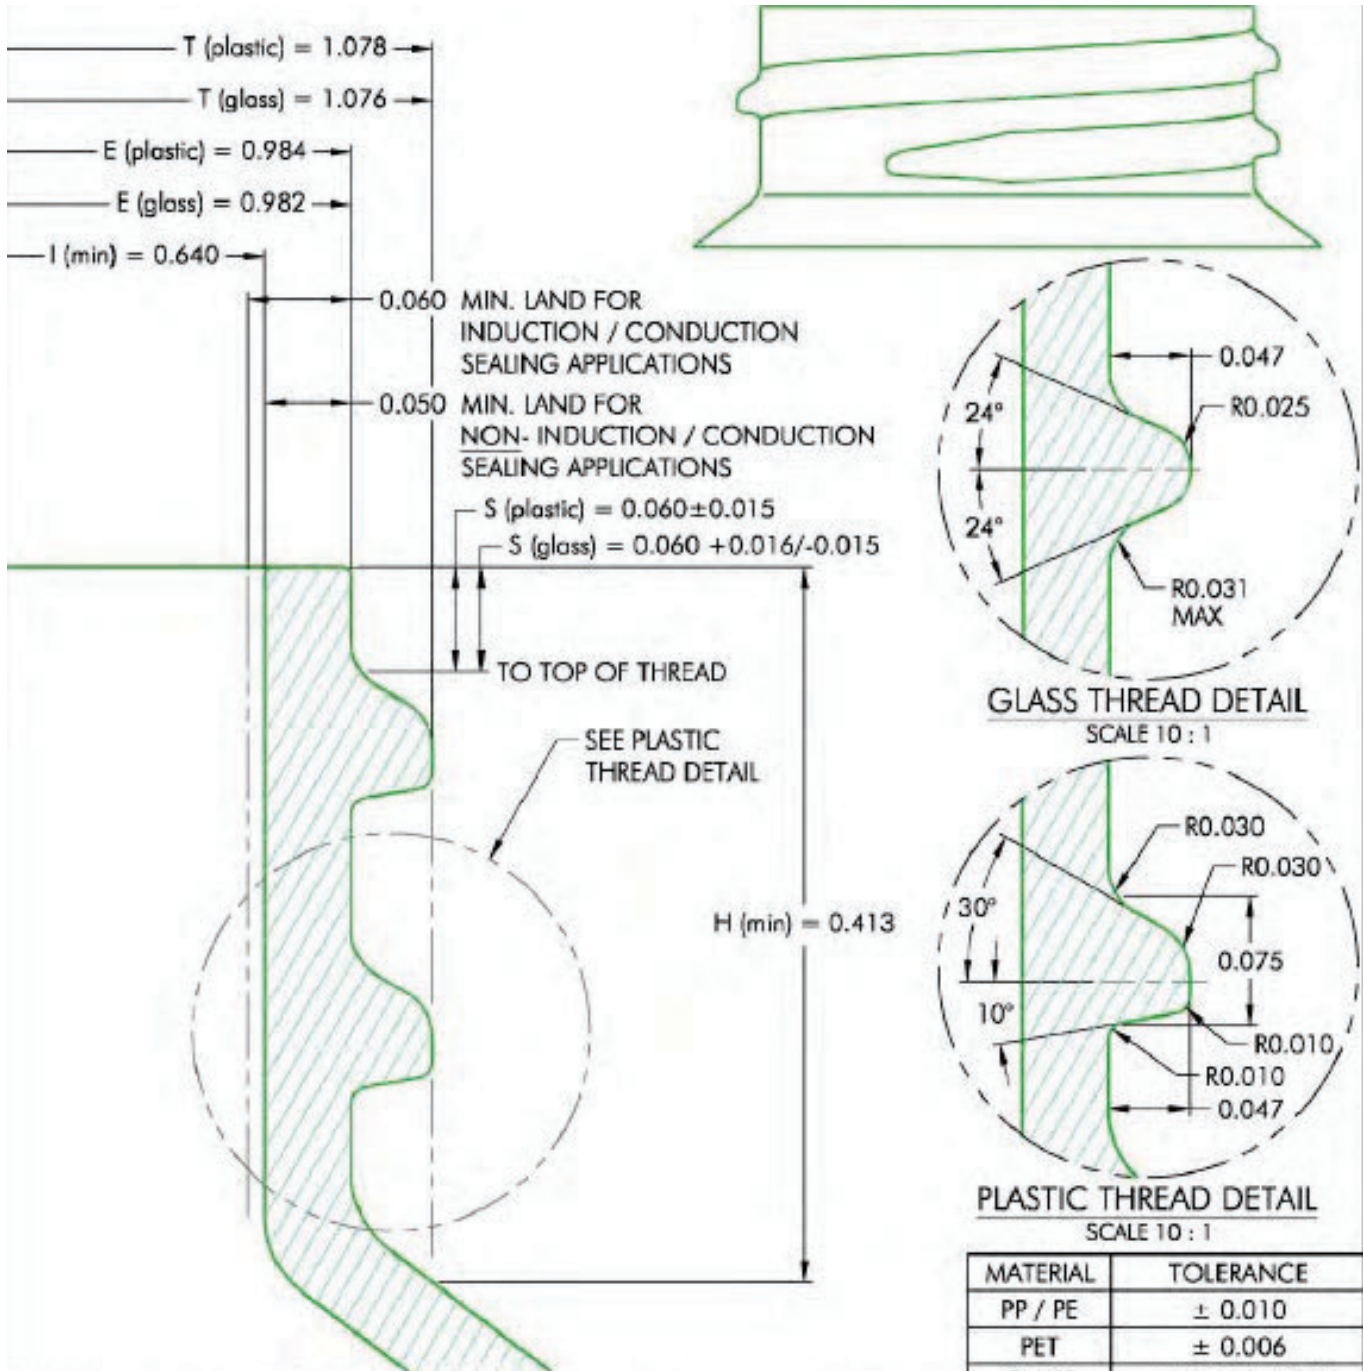

NOTES: (UNLESS OTHERWISE SPECIFIED)

1. ALL DIMENSIONS ARE IN INCHES.

2. TOLERANCE ON ALL DIMENSIONS GIVEN BY CHART.

#	00.00.00		
REV	DATE	DESCRIPTION	BY

PITCH (TPI): 6	# OF TURNS: 1-1/4	MATERIAL: PER CHART
DRAWING #:	28-400-FINISH	
DESCRIPTION:	FINISH FOR USE WITH PCI 28-400 CLOSURES	
FILE:	28-400-FINISH.dwg	SCALE: 10 : 1
DRAWN BY: RF7	DATE: 02 01 96	APPROV BY: I RF
REV: 0	RF	



SureSeal® 200 Series

Product Name:	SureSeal® 200 Series
Product Type:	One piece, three-ply coextruded liner.
Material:	Low density polyethylene skin top and bottom with foamed polyolefin core.
Composition:	Core and outer skin fusion. Closed cell foam core of LDPE is sandwiched between polyethylene skin. This results in a chemically fused, single polymeric product.
Composition Benefits:	Symmetrical construction - either side serves as the liner face. Single polymeric product - no ply-separation.
Application:	Applications have provided positive sealing for foods, beverages, pharmaceuticals, cosmetics, industrial and household chemicals.
Compatibility:	SureSeal® 200 Series is chemically inert, odorless, tasteless and dust-free. Good resistance to acids, alkalis, slow solvents, alcohols, oils and aqueous products. Poor resistance to active hydrocarbon solvents.
Performance Values:	Excellent sealability, resiliency and compression recovery. Excellent torque retention.
Thickness/Width:	Available in thicknesses of .020" to .060" (+/- .005") Widths from 1" to 36" (+/- .031")
Density:	SureSeal® 222 = 24 < 28 lbs/ft³ SureSeal® 226 = 26 < 30 lbs/ft³
Color:	FDA approved white. Custom colors available upon request.
FDA Status:	Drug Master File #12831. This material complies with FDA regulation 177.1520(c)3.1 for food contact application.