

Represented by



Product Specification Sheet

Illing Part#

4101ISOBK

55 GALLON BLACK STEEL TH DRUM LINED TAN PHENOLIC ISO

Part #: 4101ISOBK

Size:	55 Gallon
Color:	Black
Material:	Steel
Style:	TH Drum
Additional Info:	UN(X1.4/250) 2" Nylon & 3/4" Steel Bung
Case Pack:	4 each
Pallet Pack:	4 each



www.illingpackaging.com

Represented by




Product Specification Sheet

Illing Part#

4101ISOBK

Steel Drum

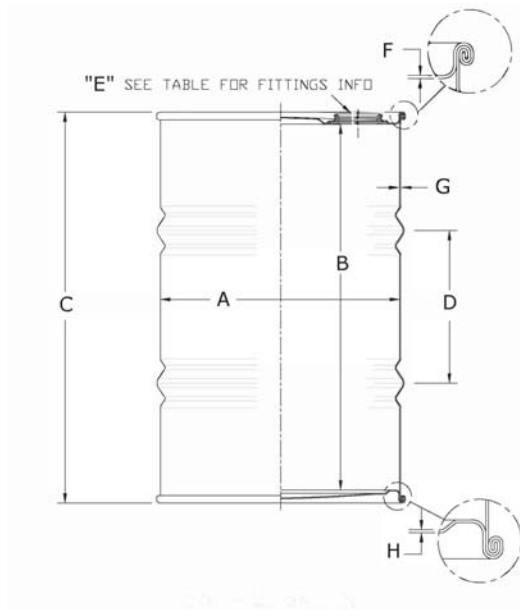

Specification

Customer Name	Illing
Customer Number	200006553
Customer Item Code	4101ISOBK
Greif Mfg Location	Alsip, IL
Greif Drum Item #	DRST00183NA20011
Greif Description	THU 550 100080100 W20 L BK 0 0

Drum Type	Tight Head Drum
Diameter (A)	22.5 inch
Nominal Capacity	55 gal
Inside Height (B)	33-5/16"
Outside Height (C)	34-5/8"
Weight (lbs)	33
Thickness Top (F)	1.00 mm / 20 gauge
Thickness Body (G)	0.80 mm / 22 gauge
Thickness Bottom (H)	1.00 mm / 20 gauge
Beads	2 - W

Gasket:	N/A
Closing Ring	N/A
Top Color	BLACK
Body Color	BLACK
Bottom Color	GRAY
Lining / Inserts	TAN PHENOLIC-RDL39 - Heavy

UN Marking:	1A1/X1.4/250 10/08/10
-------------	-----------------------

Fitting	G2 STEEL FLANGE ZINC PLATED RDL39 UC 4s®
Plug	G2 NYLON PLUG BUNA
Fitting	G3/4 STEEL FLANGE ZINC PLATED RDL39 UC 4s®
Plug	G3/4 STEEL PLUG ZINC PLATED RDL39 BUNA

Fitting Placement (E)	Head
Special Instructions	2" nylon-3/4" steel - 2" hand tight

Issued By	Greif Quality Assurance
Issue Date	3/15/2022

NOTE: The drawing above is a representation of the dimensions expressed on the Product Data Sheet and may not be to actual scale

Diameter over rolling hoops can vary +/- 1/16".

Height tolerances can vary +/- 1/8"

Center-to-Center fittings can vary +/- 1/4

Tare weight can vary +/- 5%"

NOTE: All dimensions listed on the above drum are nominal unless otherwise noted. Diameter over rolling hoops can vary +/- 1/16". Height tolerances can vary +/- 1/8". Center-to-Center fittings can vary +/- 1/4".

DISCLAIMER

This specification does not relieve the customer of their ultimate responsibility for the determination of the appropriate container. It is the customer's responsibility to select the appropriate packaging based upon all information at their disposal including the specific application, regulatory compliance, product compatibility and shipping requirements. WE HEREBY DISCLAIM AND EXCLUDE ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING WITHOUT LIMITATION THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.