


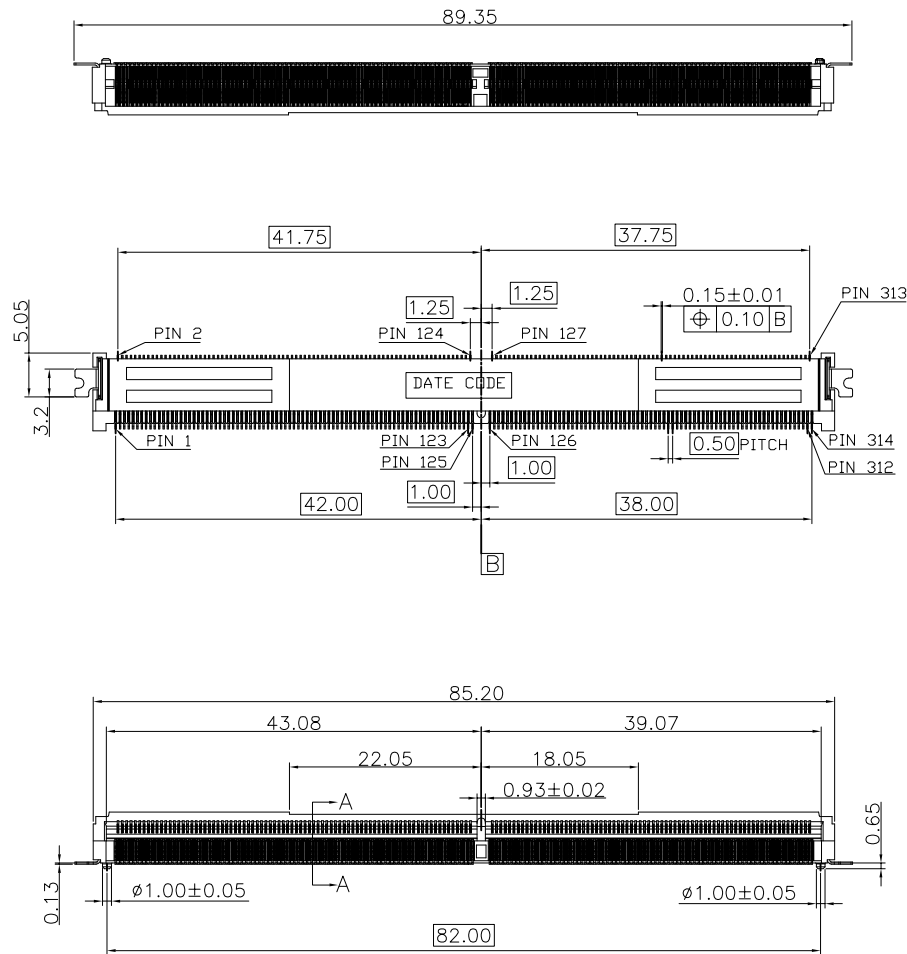

NOTES:

1. MATERIAL:

- 1.1 HOUSING: HIGH TEMPERATURE THERMO PLASTIC UL94V-0;
COLOR: BLACK
- 1.2 CONTACT: COPPER ALLOY
- 1.3 LATCH: STAINLESS

2. FINISH:

2.1 CONTACT:



CONTACT AREA: GOLD PLATING (THICKNESS SEE TABLE).

SOLDER AREA: GLOD FLASH

1.27um[50u"] MIN. NICKEL UNDERPLATING OVERALL.

2.2 LATCH: 1.27um[50u"] MIN. MATTE TIN PLATING.

3. REFLOW SOLDER CAPABLE TO 260°C MAX.

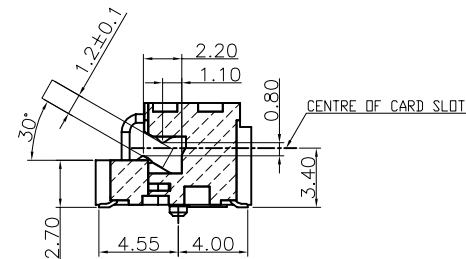

SECTION:A-A

SCALE 2:1





10160446-00XRLF

— LF: LEAD FREE
— PACKAGE CODE:
R: REEL PACKING
— PLATING CODE:
1: GOLD FLASH
2: 5u" GOLD
3: 10u" GOLD
4: 15u" GOLD


[illegible]

Halogen Free

RECOMMENDED MODULE CARD

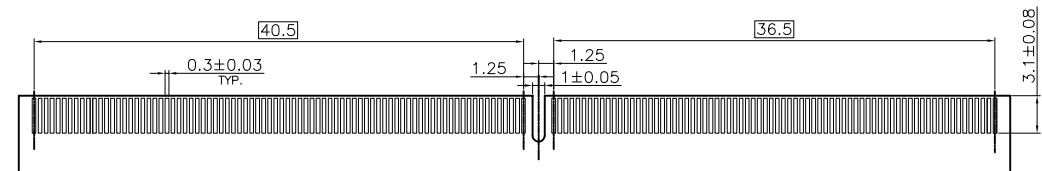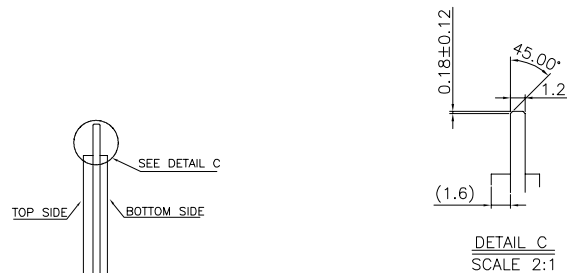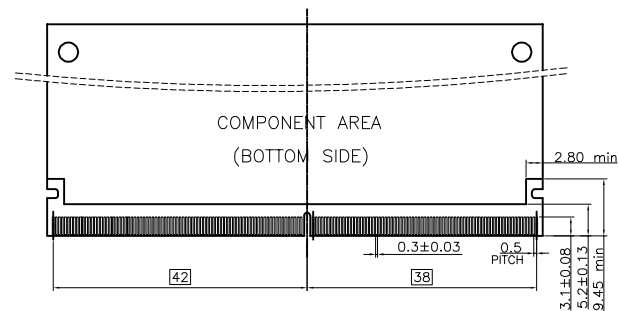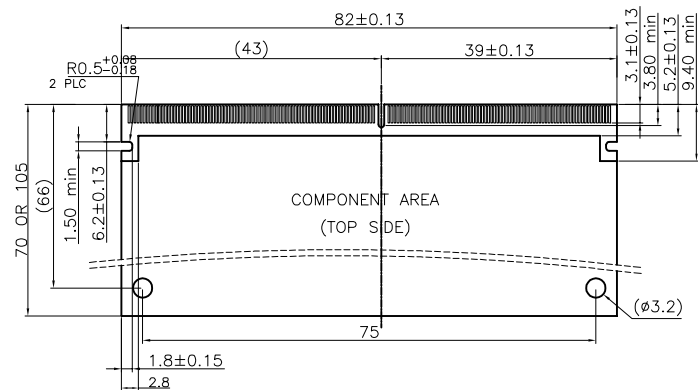


TOP SIDE
SCALE 2:1

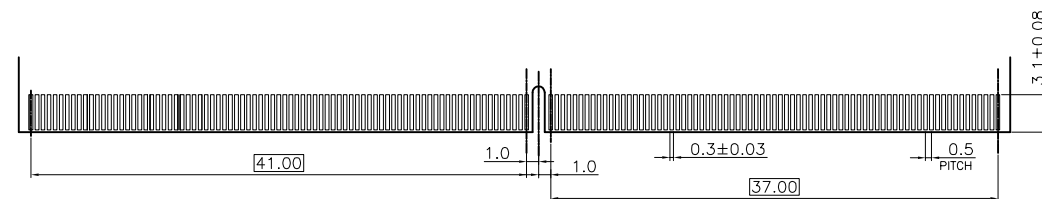

BOTTOM SIDE
SCALE 2:1

[illegible]

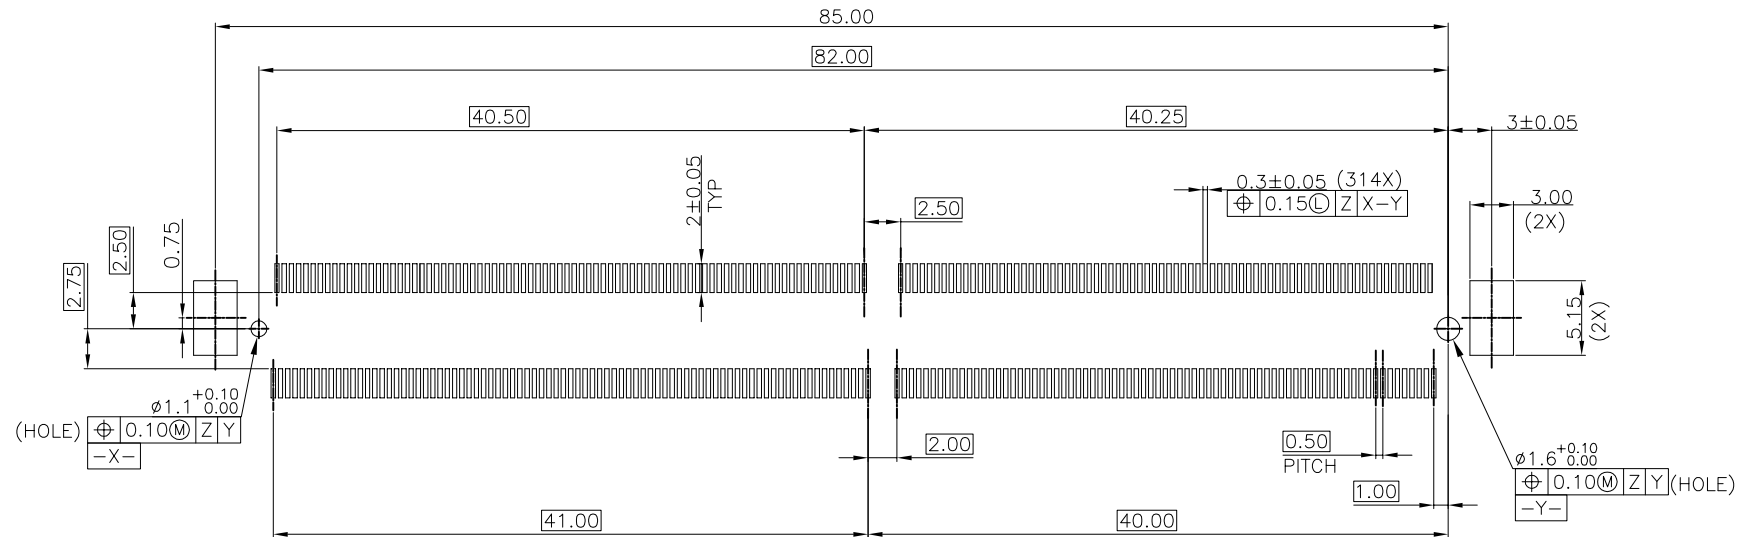


RECOMMENDED PCB LAYOUT

TOP VIEW

[illegible]

HF

Halogen Free

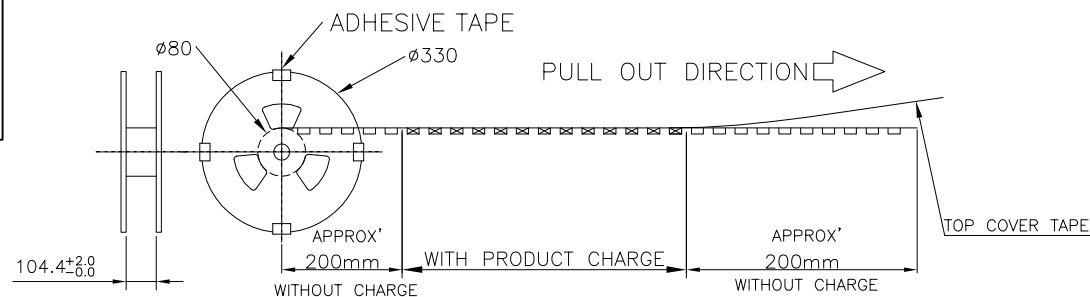

NOTES :

PACKAGING MATERIAL IN PLASTIC, RUBBER, INK, PIGMENT AND PAINT MUST MEET DEREN CONTROLLED SUBSTANCES SPEC.

* CADMIUM AND CADMIUM COMPOUNDS NOT TO EXCEED: 5 PPM.

* LEAD, CADMIUM, CHROM VI AND MERCURY NOT TO EXCEED: 100 PPM (COMBINED).

* CARRIER TAPES, COVER TAPES, REELS AND TAPED COMPONENTS MUST MEET THE REQUIREMENTS DEFINED PER EIA-481-B.

1. MATERIAL :

COVER TAPE : ANTISTATIC POLYESTER , COLOR: CLEAR

CARRIER TAPE : HIPS

REEL : PS

SHIPPING BOX: CORRUGATED FIBER

2. DIMENSION :

REEL : SEE DRAWING


BOX : SEE DRAWING

3. QUANTITY : SEE TABLE



4. WEIGHT : SEE TABLE

5. PEELING RESISTANCE : 10gf~100gf (for 8mm)
10gf~130gf (for 12mm~56mm)
10gf~150gf (for 72mm)


6. PEELING SPEED : 300mm/MINUTES

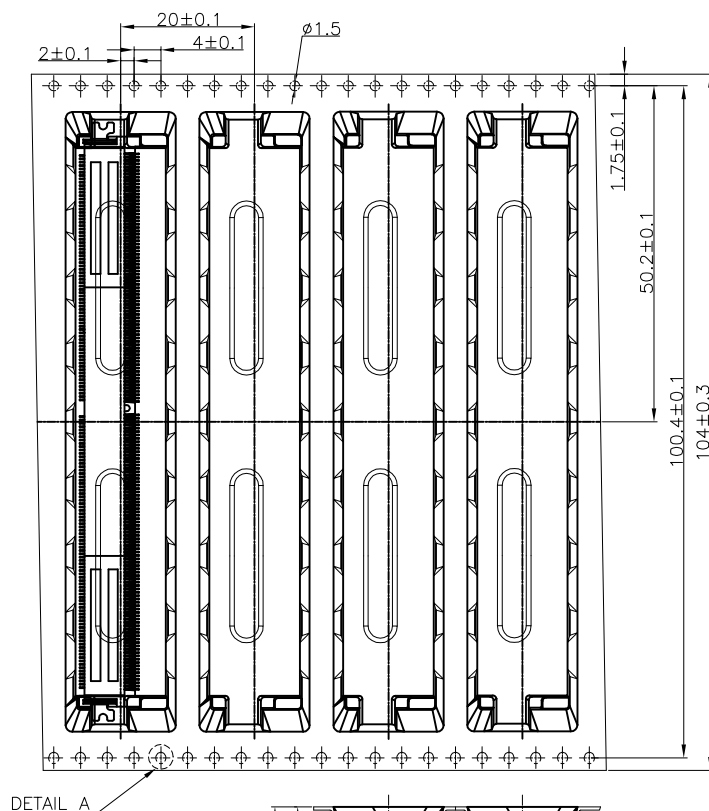

DETAIL A



DETAIL A
SCALE 4:1

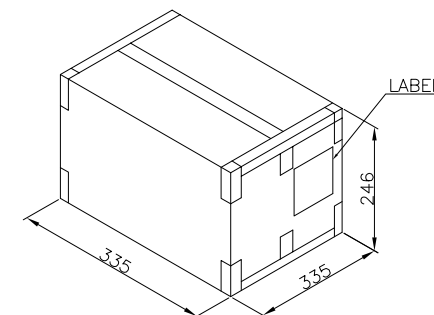

450	2	900	10160446
PCS/ REEL	REEL/ CARTON	PCS/ CARTON	PART NUMBER

mat'l. code	surface	tolerance	projection	product family
-	-	ASME_Y14.5		MXM
ltr	ecn no	dr	date	title
A				MXM_GEN4_CONNECTOR
				6.0H_314P_SMT_TYPE
				dwg no
				10160446
				sheet 4 of 4
				size
				A4
				type
				CUSTOMER Drawing
sheet index	revision sheet	A		