

## **RDH10270/2-OPC**

LG-Ericsson® RDH10270/2 Compatible TAA 10GBase-BX SFP+ Transceiver (SMF, 1330nmTx/1270nmRx, 20km, LC, DOM, -40 to 85C)

### **Features**

- SFF-8432 and SFF-8472 Compliance
- Simplex LC Connector
- Single-mode Fiber
- Industrial Temperature -40 to 85 Celsius
- Hot Pluggable
- Metal with Lower EMI
- Excellent ESD Protection
- RoHS Compliant and Lead Free



### **Applications:**

- 10GBase-BX Ethernet
- 8x/10x Fibre Channel
- Access, Metro and Enterprise

### **Product Description**

This LG-Ericsson® RDH10270/2 compatible SFP+ transceiver provides 10GBase-BX throughput up to 20km over single-mode fiber (SMF) using a wavelength of 1330nmTx/1270nmRx via an LC connector. This bidirectional unit must be used with another transceiver or network appliance of complementing wavelengths. It is capable of withstanding rugged environments and can operate at temperatures between -40 and 85C. Our transceiver is built to meet or exceed OEM specifications and is guaranteed to be 100% compatible with LG-Ericsson®. It has been programmed, uniquely serialized, and tested for data-traffic and application to ensure that it will initialize and perform identically. All of our transceivers comply with Multi-Source Agreement (MSA) standards to provide seamless network integration. This transceiver is Trade Agreements Act (TAA) compliant. We stand behind the quality of our products and proudly offer a limited lifetime warranty.

## Absolute Maximum Ratings

| Parameter                  | Symbol | Min. | Typ. | Max.              | Unit | Notes |
|----------------------------|--------|------|------|-------------------|------|-------|
| Maximum Supply Voltage     | Vcc    | -0.5 |      | 4                 | V    | 1     |
| Storage Temperature        | Tstg   | -40  |      | 85                | °C   |       |
| Operating Case Temperature | Tc     | -40  |      | 85                | °C   |       |
| Data Rate                  | DR     | 9.83 |      | 11.3              | Gbps |       |
| Bit Error Rate             | BER    |      |      | 10 <sup>-12</sup> |      |       |

### Notes:

1. For the electrical power interface.
2. IEEE 802.3ae.

## Electrical Characteristics

| Parameter                           | Symbol  | Min. | Typ. | Max.     | Unit | Notes |
|-------------------------------------|---------|------|------|----------|------|-------|
| Power Supply Voltage                | Vcc     | 3.14 | 3.3  | 3.46     | V    |       |
| Power Supply Current                | Icc     |      | 250  | 360      | mA   |       |
| Transmitter                         |         |      |      |          |      |       |
| Input Differential Impedance        | RIN     |      | 100  |          | Ω    |       |
| Differential Data Input Swing       | VIN,pp  | 180  |      | 700      | mV   |       |
| Transmit Disable Voltage            | VD      | 2    |      | Vcc      | V    |       |
| Transmit Enable Voltage             | VEN     | Vee  |      | Vee+0.8  | V    |       |
| Receiver                            |         |      |      |          |      |       |
| Differential Data Output Swing      | VOUT,pp | 300  |      | 850      | mV   |       |
| Data Output Rise/Fall Time (20-80%) | Tr/Tf   | 28   |      |          | ps   |       |
| LOS Assert                          | VLOSA   | 2    |      | Host_Vcc | V    |       |
| LOS De-Assert                       | VLOSD   | Vee  |      | Vee+0.5  | V    |       |

## Optical Characteristics

| Parameter                       | Symbol                                 | Min. | Typ. | Max.  | Unit  | Notes |
|---------------------------------|----------------------------------------|------|------|-------|-------|-------|
| Transmitter                     |                                        |      |      |       |       |       |
| Output Optical Power            | PTx                                    | -8.2 |      | 0.5   | dB    | 1     |
| Optical Center Wavelength       | λC                                     | 1320 | 1330 | 1340  | nm    |       |
| Extinction Ratio                | ER                                     | 3.5  |      |       | dB    |       |
| Spectral Width (-20dB)          | Δλ                                     |      |      | 0.6   | nm    |       |
| Side-Mode Suppression Ratio     | SMSR                                   | 30   |      |       | dB    |       |
| Relative Intensity Noise        | RIN                                    |      |      | -128  | dB/Hz |       |
| Transmitter Dispersion Penalty  | TDP                                    |      |      | 3.2   | dB    |       |
| Launch Power of Off Transmitter | Poff                                   |      |      | -30   | dBm   | 2     |
| Transmitter Jitter              | According to IEEE 802.3ae Requirements |      |      |       |       |       |
| Receiver                        |                                        |      |      |       |       |       |
| Receiver Overload               | Pol                                    | 0.5  |      |       | dBm   |       |
| Optical Center Wavelength       | λC                                     | 1260 | 1270 | 1280  | nm    |       |
| Receiver Sensitivity            | Rx_sen                                 |      |      | -14.4 | dBm   | 3     |
| Receiver Reflectance            | TRrx                                   |      |      | -12   | dB    |       |
| LOS Assert                      | LOSA                                   | -30  |      |       | dBm   |       |
| LOS De-Assert                   | LOSD                                   |      |      | -17   | dBm   |       |
| LOS Hysteresis                  | LOSH                                   | 0.5  |      |       | dB    |       |

### Notes:

1. Average. Normal temperature optical power range: -2~0.5dBm.
2. Average.
3. Average. Measured with worst ER: BER<10<sup>-12</sup> and 2<sup>31</sup>-1 PRBS.


## Pin Descriptions

| Pin | Symbol     | Name/Description                                                  | Notes |
|-----|------------|-------------------------------------------------------------------|-------|
| 1   | VeeT       | Transmitter Ground (Common with Receiver Ground).                 | 1     |
| 2   | Tx_Fault   | Transmitter Fault.                                                | 2     |
| 3   | Tx_Disable | Transmitter Disable.                                              | 3     |
| 4   | SDA        | 2-Wire Serial Interface Data.                                     | 4     |
| 5   | SCL        | 2-Wire Serial Interface Clock.                                    | 4     |
| 6   | MOD_ABS    | Module Absent. Grounded within the module.                        | 4     |
| 7   | RS0        | No Connection Required.                                           |       |
| 8   | LOS        | Loss of Signal Indication. "Logic 0 " indicates normal operation. | 5     |
| 9   | RS1        | No Connection Required.                                           | 1     |
| 10  | VeeR       | Receiver Ground (Common with Transmitter Ground).                 | 1     |
| 11  | VeeR       | Receiver Ground (Common with Transmitter Ground).                 | 1     |
| 12  | RD-        | Receiver Inverted Data Out. AC Coupled.                           |       |
| 13  | RD+        | Receiver Non-Inverted Data Out. AC Coupled.                       |       |
| 14  | VeeR       | Receiver Ground (Common with Transmitter Ground).                 | 1     |
| 15  | VccR       | Receiver Power Supply.                                            |       |
| 16  | VccT       | Transmitter Power Supply.                                         |       |
| 17  | VeeT       | Transmitter Ground. Common with Receiver Ground.                  | 1     |
| 18  | TD+        | Transmitter Non-Inverted Data In. AC Coupled.                     |       |
| 19  | TD-        | Transmitter Inverted Data In. AC Coupled.                         |       |
| 20  | VeeT       | Transmitter Ground (Common with Receiver Ground).                 | 1     |


### Notes:

1. The circuit ground is isolated from the chassis ground.
2. Tx\_Fault is the open collector output and should be pulled up with 4.7k $\Omega$  to 10k $\Omega$  on the host board to a voltage between 2V and Vcc+0.3V.
3. Disabled: Tdis>2V or open. Enabled: Tdis<0.8V.
4. Should be pulled up with 4.7k $\Omega$  to 10k $\Omega$  on the host board to a voltage between 2V and Vcc+0.3V.
5. LOS is open collector output and should be pulled up with 4.7k $\Omega$  to 10k $\Omega$  on the host board to a voltage between 2V and Vcc0.3V. Logic "0" indicates normal operation. Logic "1" indicates that the receiver signal is lost.

## Pin Assignments

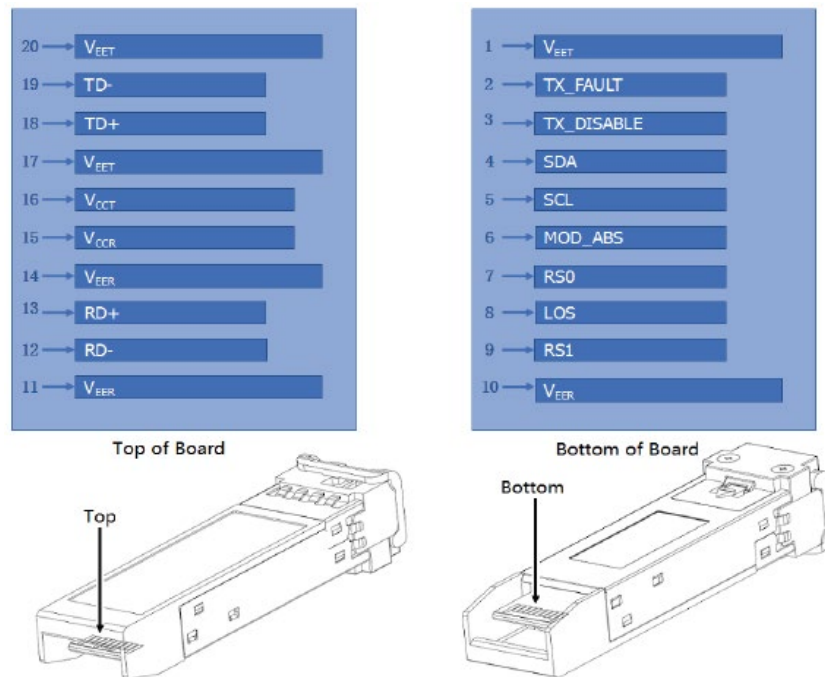

## Block Diagram of Transceiver

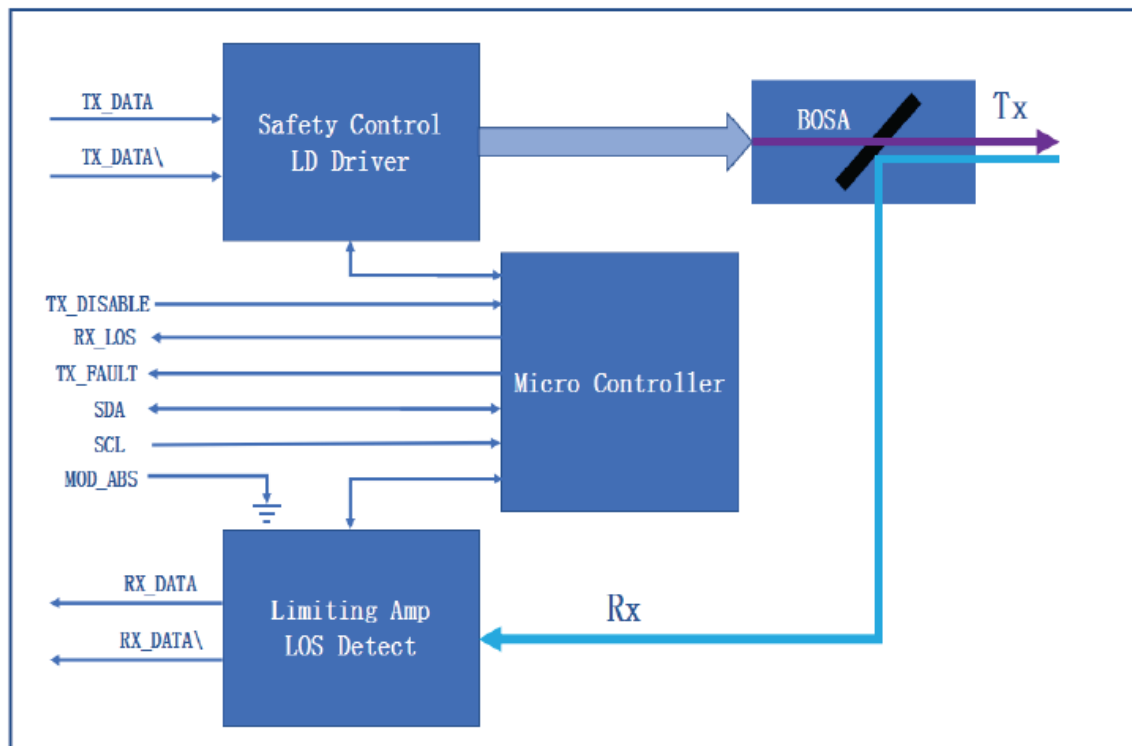

**Mechanical Specifications**

