

## **Q28-100GP4-BXD3129-20-I-CX-AO**

Calix® Compatible TAA 100GBase-BX LR1 PAM4 QSFP28 Transceiver Single Lambda (SMF, 1311nmTx/1291nmRx, 20km, LC, DOM, -40 to 85C)

### **Features**

- Compliant with Industry Standards 100G-LR1-20 Lambda MSA
- PIN Receiver
- Compliant with SFF-8661, SFF-8636, and SFF-8679 MSA
- Hardware Specifications
- Up to 20km on 9/125 $\mu$ m SMF
- Operating Temperature: -40 to 85 Celsius
- EML Laser
- Industrial Temperature -40 to 85 Celsius
- RoHS Compliant and Lead-Free
- RoHS Compliant and Lead Free



### **Applications**

- Datacenter
- 100GBase Ethernet

### **Product Description**

This Calix® compatible QSFP28 transceiver provides 100GBase-BX LR1 throughput up to 20km over single-mode fiber (SMF) PAM4 using a wavelength of 1311nmTx/1291nmRx via an LC connector. This bidirectional unit must be used with another transceiver or network appliance of complementing wavelengths. It can operate at temperatures between -40 and 85C. Our transceiver is built to meet or exceed OEM specifications and is guaranteed to be 100% compatible with Calix®. It has been programmed, uniquely serialized, and tested for data-traffic and application to ensure that it will initialize and perform identically. All of our transceivers comply with Multi-Source Agreement (MSA) standards to provide seamless network integration. Additional product features include Digital Optical Monitoring (DOM) support which allows access to real-time operating parameters. We stand behind the quality of our products and proudly offer a limited lifetime warranty.

AddOn's transceivers are RoHS compliant and lead-free.

TAA refers to the Trade Agreements Act (19 U.S.C. & 2501-2581), which is intended to foster fair and open international trade. TAA requires that the U.S. Government may acquire only "U.S.-made or designated country end products."



### Absolute Maximum Ratings

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Operating Temperature	T <sub>c</sub>	-40		85	°C	
Storage Temperature	T <sub>stg</sub>	-40		85	°C	
Relative Humidity	RH	15		85	%	
Supply Voltage	V <sub>cc</sub>	0		3.6	V	
Data Input Voltage		-0.3		3.6	V	
Control Input Voltage		-0.3		4	V	
Data Rate	DR		53.125 ± 100ppm		GBd	
Bit Error Rate	BER			2.4E <sup>-4</sup>		1
Supported Link Length on 9/125µm SMF @53.125GBd	L		20		km	2

#### Notes:

1. Tested with a PRBS31Q test pattern for 53.125GBd operation.
2. Distances are based on FC-PI-6 Rev. 3.1 and IEEE 802.3 standards with FEC.

### Electrical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Power Supply Voltage	V <sub>cc</sub>	3.13	3.3	3.47	V	
Module Supply Current	I <sub>cc</sub>			1437	mA	1
Power Dissipation	PD			4500	mW	
<b>Transmitter</b>						
Differential Input Impedance	Z <sub>IN</sub>	90	100	110	Ω	
Differential Data Input Swing	V <sub>IN,pp</sub>	180		900	mVp-p	
<b>Receiver</b>						
Differential Output Impedance	Z <sub>OUT</sub>	90	100	110	Ω	
Differential Data Output Swing	V <sub>OUT,pp</sub>	300		900	mVp-p	

#### Notes:

1. The maximum current is calculated at the minimum supply voltage.

## Optical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
<b>Transmitter</b>						
<b>Average Launch Optical Power</b>	Po	-0.2		6.6	dBm	1
<b>Launch Optical Power (OMA)</b>	Poma	2.8		6.8	dBm	2
		1.4+TDECQ				3
<b>Extinction Ratio</b>	ER	3.5			dB	
<b>Center Wavelength</b>	$\lambda$ C	1304.5	1311	1317.5	nm	
<b>Transmitter and Dispersion Penalty Eye Closure for PAM4</b>	TDECQ			3.6	dB	
<b>Transmitter Eye Closure for PAM4</b>	TECQ			3.4	dB	
<b>RIN<sub>17.1</sub>OMA (Maximum)</b>	RIN			-136	dB/Hz	
<b>Optical Return Loss Tolerance</b>	ORLT			15.6	dB	
<b>POUT @Tx_Disable Asserted</b>	Poff			-15	dBm	
<b>Receiver</b>						
<b>Center Wavelength</b>	$\lambda$ C	1284.5	1291	1297.5	nm	
<b>Receiver Sensitivity (OMA)</b>	RxSENS			-7.6	dBm	1, 4
				-9+TECQ		5
<b>Receiver Reflectance</b>				-26	dB	
<b>LOS De-Assert</b>	LOSD			-12	dBm	
<b>LOS Assert</b>	LOSA	-18			dBm	
<b>LOS Hysteresis</b>		0.5			dB	

### Notes:

1. Measured with PRBS31Q test pattern, @53.125GBd, and BER<2.4E<sup>-4</sup>.
2. TDECQ < 1.4dB.
3. 1.4dB ≤ TDECQ ≤ TDECQ, maximum.
4. TECQ < 1.4dB.
5. 1.4dB < TECQ ≤ 3.6dB.


## Pin Descriptions

Pin	Logic	Symbol	Name/Description	Notes
1		GND	Module Ground.	1
2	CML-I	Tx2-	Transmitter Inverted Data Input.	
3	CML-I	Tx2+	Transmitter Non-Inverted Data Output.	
4		GND	Module Ground.	1
5	CML-I	Tx4-	Transmitter Inverted Data Input.	
6	CML-I	Tx4+	Transmitter Non-Inverted Data Input.	
7		GND	Module Ground.	1
8	LVTTI-I	ModSelL	Module Select.	2
9	LVTTI-I	ResetL	Module Reset.	2
10		VccRx	+3.3V Receiver Power Supply.	
11	LVCMOS-I/O	SCL	2-Wire Serial Interface Clock.	2
12	LVCMOS-I/O	SDA	2-Wire Serial Interface Data.	2
13		GND	Module Ground.	1
14	CML-O	Rx3+	Receiver Non-Inverted Data Output.	
15	CML-O	Rx3-	Receiver Inverted Data Output.	
16		GND	Module Ground.	1
17	CML-O	Rx1+	Receiver Non-Inverted Data Output.	
18	CML-O	Rx1-	Receiver Inverted Data Output.	
19		GND	Module Ground.	1
20		GND	Module Ground.	1
21	CML-O	Rx2-	Receiver Inverted Data Output.	
22	CML-O	Rx2+	Receiver Non-Inverted Data Output.	
23		GND	Module Ground.	1
24	CML-O	Rx4-	Receiver Inverted Data Output.	
25	CML-O	Rx4+	Receiver Non-Inverted Data Output.	
26		GND	Module Ground.	1
27	LVTTI-O	ModPrsL	Module Present.	
28	LVTTI-O	IntL/RxLOSL	Interrupt. Optionally configurable as RxLOSL via the management interface (SFF-8636).	2
29		VccTx	+3.3V Transmitter Power Supply.	
30		Vcc1	+3.3V Power Supply.	
31	LVTTI-I	LPMode/TxDis	Low-Power Mode. Optionally configurable as TxDis via the management interface (SFF-8636).	2
32		GND	Module Ground.	1
33	CML-I	Tx3+	Transmitter Non-Inverted Data Input.	
34	CML-I	Tx3-	Transmitter Inverted Data Input.	
35		GND	Module Ground.	1
36	CML-I	Tx1+	Transmitter Non-Inverted Data Input.	
37	CML-I	Tx1-	Transmitter Inverted Data Input.	
38		GND	Module Ground.	1


## Notes:

1. GND is the symbol for signal and supply (power) common for the module. All are common within the module, and all module voltages are referenced to this potential unless otherwise noted. Connect these directly to the host board signal common ground plane.
2. VccRx, Vcc1, and VccTx are applied concurrently and may be internally connected within the module in any combination. Vcc contacts in SFF-8662 and SFF-8672 each have a steady state current rating of 1A.


## Electrical Pin-Out Details

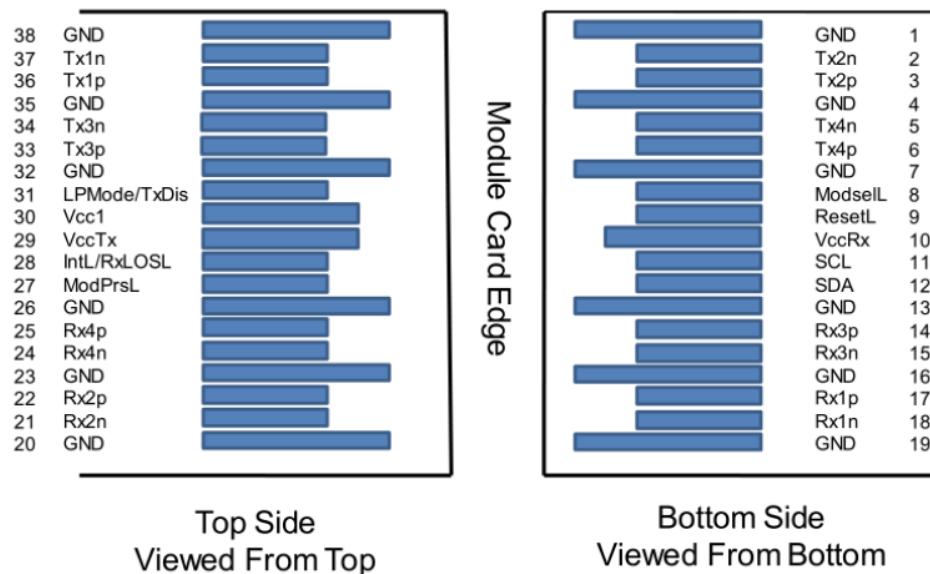

## Block Diagram

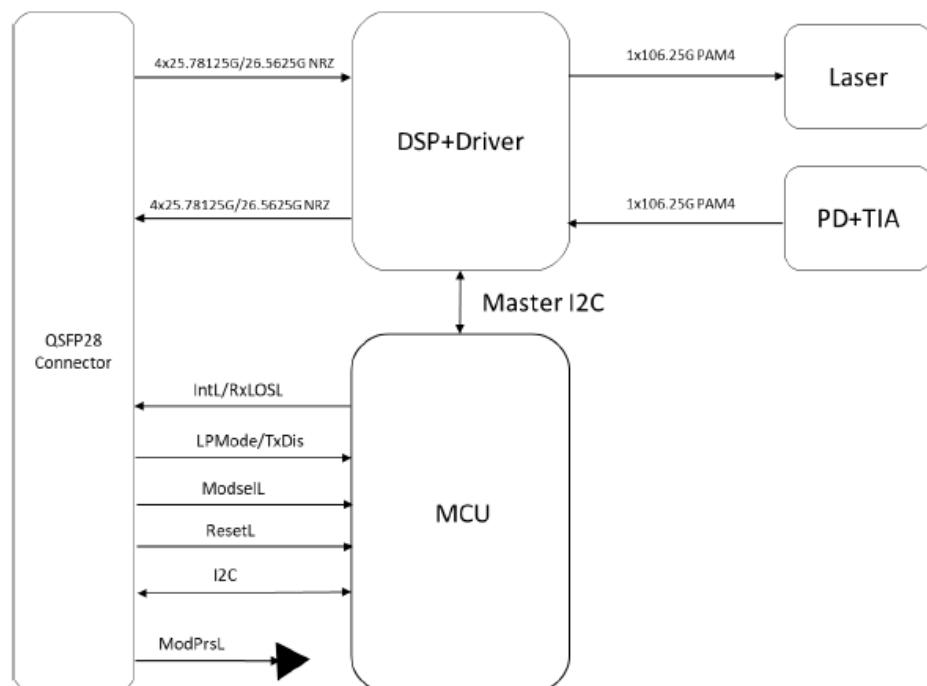

## Mechanical Specifications

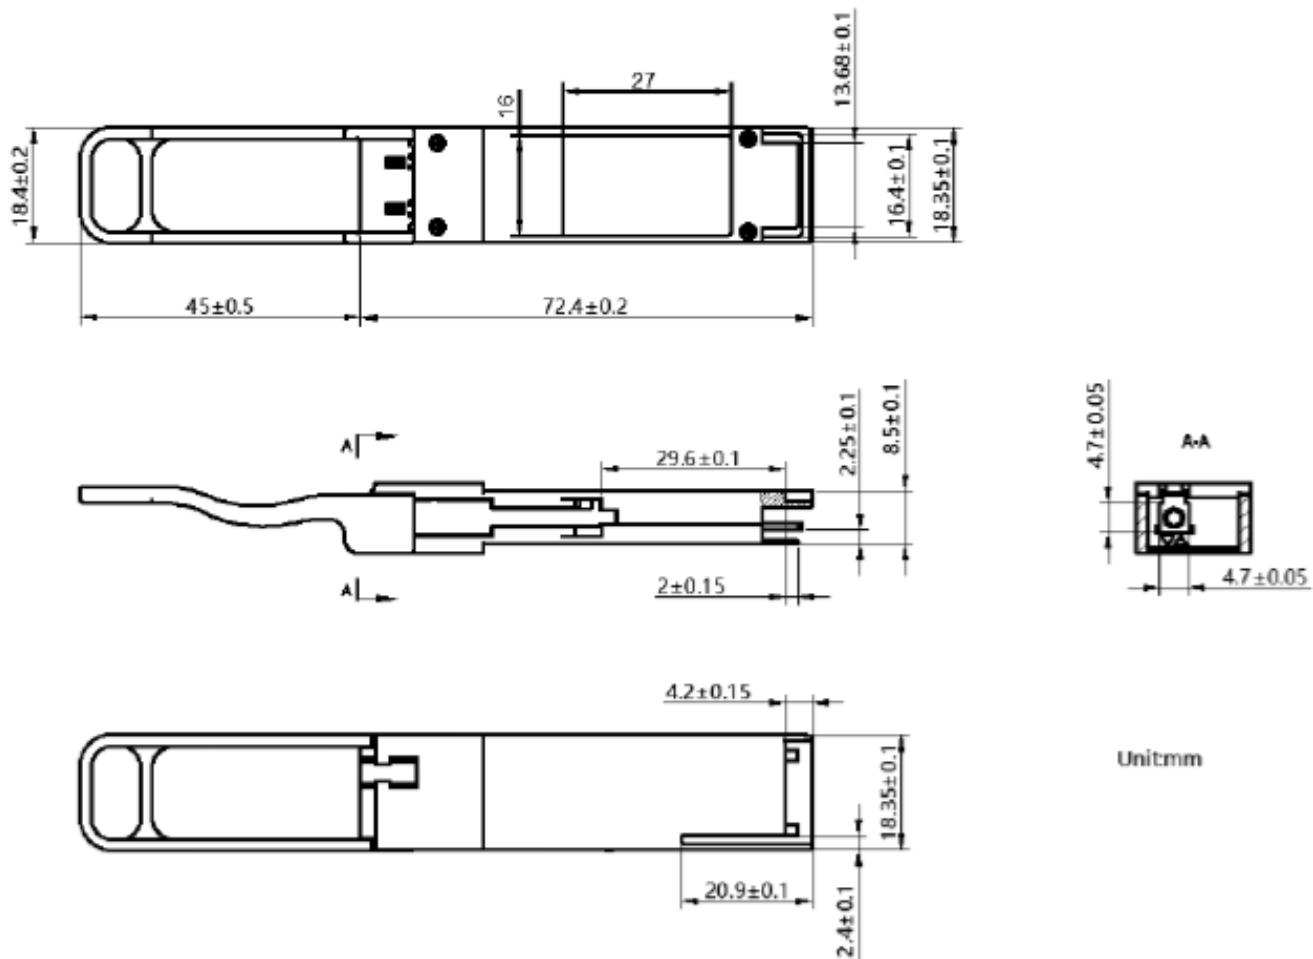

## About AddOn Networks

In 1999, AddOn Networks entered the market with a single product. Our founders fulfilled a severe shortage for compatible, cost-effective optical transceivers that compete at the same performance levels as leading OEM manufacturers. Adhering to the idea of redefining service and product quality not previously had in the fiber optic networking industry, AddOn invested resources in solution design, production, fulfillment, and global support.

Combining one of the most extensive and stringent testing processes in the industry, an exceptional free tech support center, and a consistent roll-out of innovative technologies, AddOn has continually set industry standards of quality and reliability throughout its history.

Reliability is the cornerstone of any optical fiber network and is engrained in AddOn's DNA. It has played a key role in nurturing the long-term relationships developed over the years with customers. AddOn remains committed to exceeding industry standards with certifications from ranging from NEBS Level 3 to ISO 9001:2005 with every new development while maintaining the signature reliability of its products.



## U.S. Headquarters

Email: [sales@addonnetworks.com](mailto:sales@addonnetworks.com)

Telephone: +1 877.292.1701

Fax: 949.266.9273

## Europe Headquarters

Email: [salesupportemea@addonnetworks.com](mailto:salesupportemea@addonnetworks.com)

Telephone: +44 1285 842070